



01948 667 600




info@securasound.co.uk



The Hollies, Chester rd,
Whitchurch, SY13 1LZ

Engineering data sheet

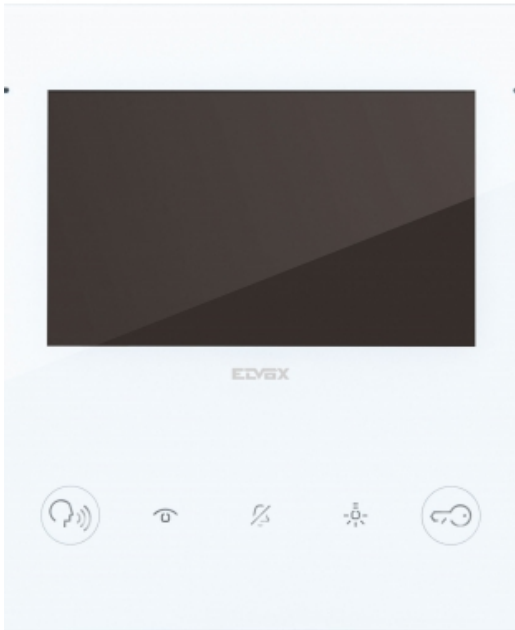

40515 Tab 5S up two wire wi-fi colour video monitor

- 5" LCD Colour Display
- Integrated W-Fi for call repetition on smart phone with dedicated app
- Capacitive buttons for lock release and call acceptance
- clear open voice communication
- Privacy of conversation
- User selectable ringtones
- Hearing aid compatible
- Video voicemail facility
- Intercommunication with other devices

Specifications

System Two wire video with built in Wi-Fi access capability

Controls Capacitive buttons for: Door Release, Speech, Self activation, auxiliary function. User control of brightness, volume and muting.

Construction Moulded high impact plastic in white

Dimensions 148mm wide x 158mm high x 24.4mm deep(surface mounted) 13.1mm (semi-flush mounted with 40590 back box)

Nett weight 0.78 kg

General information

The 40515 Tab 5S UP video monitor has a 5" capacitive colour touch screen. The monitor has dedicated controls for call acceptance and lock release. It is recommended that the monitor is wired using copper Cat5e/6e cable configured to provide 2 cores.

Volume levels, ring tone selection, camera activation, do not disturb and monitor to monitor communication are via the touch screen interface.

The monitor has the ability to connect to the end users WiFi network for call forwarding via 3G/4G to a maximum of 10 devices using the dedicated 'Vimar view' app.

The monitor can be semi flush using the 40590 mounting box.