







Open Voice Intercom




Master station	Door station	Room sub station
 LEM-1 1-call master	 LEM-3 3-call master	 LE-D Sub station → P.68
 LE-A Sub station → P.68	 LE-DA Sub station → P.68	 LE-AN Privacy sub → P.68
Power supply PS-0603DIN → P.100		

Features


- Open voice communication
- Push-to-talk at master, hands free at remote
- LE sub stations: either door station or room sub station
- Voice volume control

Communication network

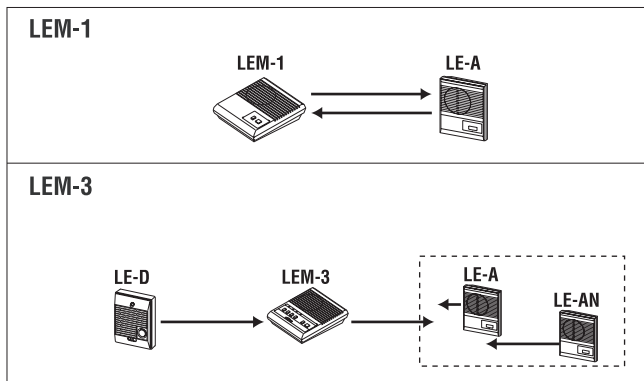


LEM-1; Tone or voice. LEM-3; Selective call w/tone or voice. Tone and LED from sub

Unit dimensions

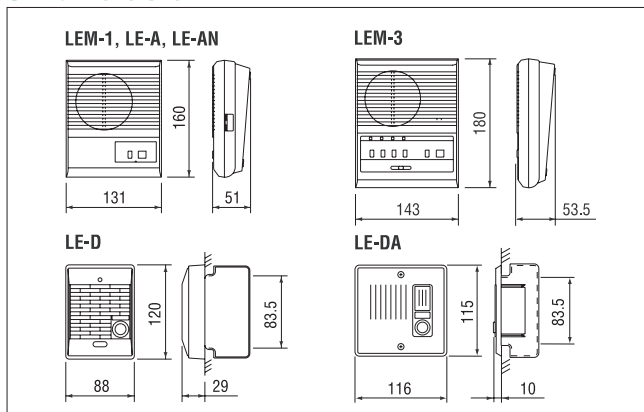

Wiring

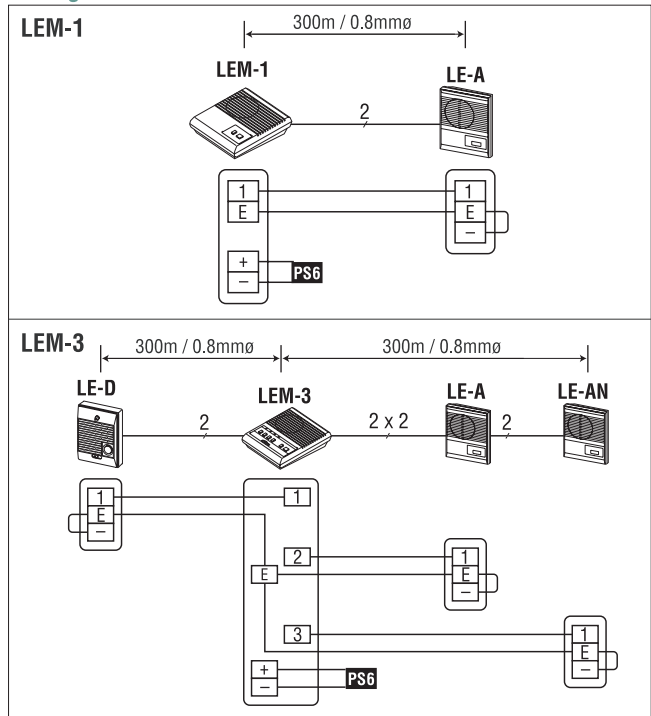

★ Do not remove shorting link on subs. **PS6** : PS-0603DIN

Specifications (LEM)

Power source	6V DC, 200mA
Power supply	PS-0603DIN
Communication	Sub calls in w/tone and LED, 20 sec. Depress selector button and press or release TALK button. Sub called by tone or voice. Reply handsfree.
Output	350mW output, adjustable
Wiring	2 parallel wires per sub, non-polarized
Distance	LEM to sub 200m(0.65mmø) 300m(0.8mmø)