# General catalog 2022





# auta

# Bringing people together

They say that the first impression is what counts, and our products are the first impression that visitors receive, so at Auta we face a new era with the mission of revaluing the role of door and video door systems.

Our new designs and functionalities use technology to adapt to the present and anticipate the future, without losing sight of our essence.

At Auta we create products so that you open your doors to others safely and trust. Our mission is to facilitate meetings and bring people closer together.







# Values

# **QUALITY**

Our products are designed and produced to respond reliably to the most demanding uses. They are certified ES99 / 0101 (ISO 9001) in design, manufacture, marketing and repair of electronic door phones and video door phones.

The not seen components as well as well as the seen finishes have both the same high quality.

# **CLOSENESS**

We are a Spanish company focused on our clients. We pride ourselves on responding when they need us and being fast and efficient in shipments and solutions, before or after the sale.



Customer Service

961 643 020

**YouTube** 

Auta Comunicaciones s.l.



auta.es



# **COMPROMISE**


We are one of the most important European manufacturers of door, video door and access control systems.

The more than 50 years of experience and the presence on the five continents are the result of our commitment to technology, design, flexibility and reliability.

# **TRUST**

At Auta we design and manufacture all our products in Spain for the world. This is a guarantee of trust for our national and international clients, since we remain faithful to the commitment to quality and service that has characterized us since 1966.



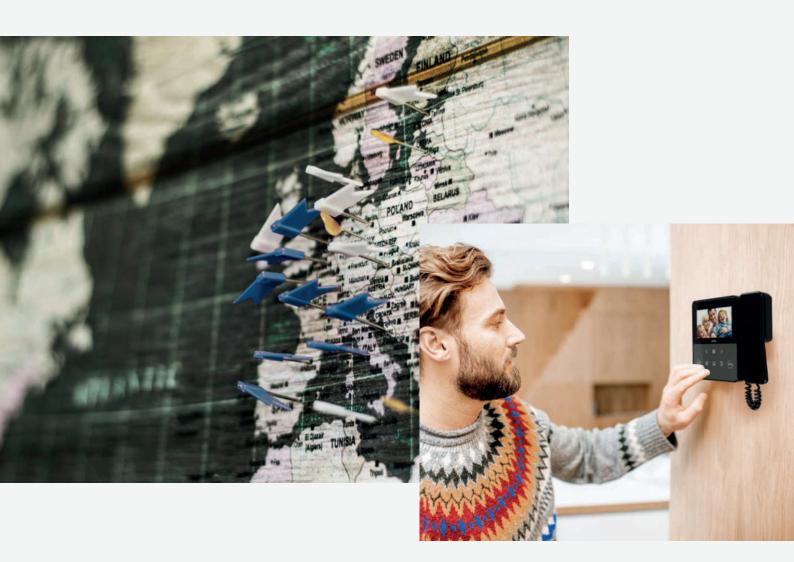

# Index









neos

8 Door and video door entry systems

#### **ENTRY PANELS**

- 8 Compact
- 9 Stainless Steel

#### **MONITORS & HANDSETS**

- 10 Neos range
- 14 Neos 7 / Onex
- 18 E-Compact
- 19 Slim
- 20 Compact

## 22 Wi-Fi Auta FREE system



onex Wi-Fi

## 26 ONEX IP system

# 34 Compact entry panels

- 36 Compact entry panels T
- 40 Compact entry panels TT
- 42 Compact push-buttons & cardholders
- 46 Compact alphanumeric entry panels
- 48 Accessories

# 50 Stainless Steel entry panels

- 51 Stainless Steel entry panels
- 56 Stainless Steel push-buttons & cardholder
- 60 Stainless Steel alphanumeric entry panels



stainless compact steel

# auta

Bringing people together



## 63 Systems

64 Systems compatibility

#### 2 WIRES

- 68 Entry Panels
- 70 Monitors & handsets
- 73 Accessories

#### **VISUALTECH**

- 76 Entry Panels
- 79 Monitors & handsets
- 86 Central Guard Porter
- 88 Accessories

#### PLUG & PLAY / ISO PLUG & PLAY

- 92 Entry Panels
- 95 Monitors & handsets
- 98 Central Guard Porter
- 100 Accessories

#### COAX / COAXLESS

- 104 Entry Panels
- 108 Monitors & handsets
- 113 Central Guard Porter
- 114 Accessories

#### INTERCOM

- 118 Entry Panels
- 121 Monitors & handsets
- 123 Central Guard Porter
- 124 Accessories
- 126 Internal communication system
- 127 Power supplies

#### **ANALOG**

- 130 Entry Panels
- 132 Handsets
- 134 Monitors
- 135 Accessories

#### **136** Kits

- 138 Kits 2 Wires
- 146 Kits Visualtech
- 160 Kits Coax
- 170 Kits Coaxless
- 180 Kits Audio Digital
- 184 Kits Audio Analog

## 186 Door openers

## 188 Spares

## 190 Access control

- 191 Standalone
- 193 Standalone Off-line
- 194 Network
- 196 Network web management
- 197 Standalone / remote management
- 198 Power supplies & accessories

## 200 GENERAL CONDITIONS



e-compact



slim

# compact

# The evolution

Entry panels that reflect the evolution of the design and provide to the space and unique style.

Its elegant and modern design adopts soft shapes with an excellent anodized aluminum finishing that provide and ideal solution for every level of demand

Anodized aluminum

Quality and resistance

Semi-modulars

5 sizes

Versatile: audio, audio/video & access control Surface or flush mounted

Maximum performance



## SERIES



#### **ALPHANUMERIC**



Series 4 Series 5

#### Compatibility



COMPACT ALPHANUMERIC entry panels are not available in analog system.





# stainless steel

# Design & steel

Auta stainless steel range is presented in the form of solid and elegant designs seeking the highest levels of quality and functionality.

Entry panels made of 2,5mm thick stainless steel with safety screws and fully sealed steel push-buttons IP-65.

Stainless Steel

IP-65 push-buttons

Robustness and durability

5 sizes

Maximum performance

Customizable in size and push-button location

Gloss finishing, hand polished.






#### **SERIES**



#### **ALPHANUMERIC**







RANGE

# neos

the beginning of a new era



KNOW MORE ABOUT THE NEOS RANGE

auta.es/en/neos/





Simple and intuitive navigation



High quality sound



LCD 4,3" screen, 16:9



buttons



Induction loop amplification system (Teleloop)

# auta Bringing people together

# neos

HANDSFREE + HANDSET

To choose the way to answer



See video





# Handset...

to respond without others listening the conversation.



# .. or handsfree

4,3" screen (16:9) Surface installation Backlit touch buttons Dual operation handsfree to handset and vice versa Mute function

Messages on screen

Sequential self-starting (entry panels and cameras scrolling

Adjustment of ringtones and

Adjustment of brightness, color & contrast

Auxiliary functions (door-bell, remote door opening, ...)

#### Available finishes



# Compatibility







auta

\* COMING SOON



# Door and video door entry

MONITORS & HANDSETS

# neos

**HANDSFREE** 

# The lightest design



Navigation and adjustments



Answer



Mute / ringtones



Self-starting



Special functions




Door opening Call to porter

Speaker



## Available finishes







#### Compatibility







Microphone

\* COMING SOON





# neos

**HANDSET** 

# For installations with no video




Door opening Call to porter



Auxiliary Self-starting Ringtones / call volume





#### Available finishes





#### Compatibility












\* COMING SOON

# neos 7"

HANDSFREE Wi-Fi





universal box 60x60 LCD screen 7", touch buttons Handsfree





Newest from Neos, now with

# MOBILE PHONE MANAGEMENT AND A LARGER SCREEN

freedom in your hands



Control your world with the freedom of a new mobile, connected and easier era.

The new Neos family monitor integrates a 7-inch touch screen and Wi-Fi connectivity to attend to your visits from anywhere thanks to the AUTA ONEX APP.



7 inch alass screen



Touch screen

- > CONNECTED BY WIFI
- > OWN APP
- > EASY INSTALLATION
- > COMPATIBLE WITH PREVIOUS **AUTA INSTALLATIONS**
- > CONTINUOUS UPDATES









# neos 7"

# freedom in your hands





## Backward compatibility

The new neos 7 "is compatible with all previous digital systems of the  $\ensuremath{\mathsf{AUTA}}$ family, regardless of their age, allowing the renovation of the video intercom of a private home independently of the neighborhood.



## Continuous updates


Free and unlimited access to monitor software upgrades, with regular system updates and the latest firmware versions always available to users.





## Our shops

Scan the QR codes and download the AUTA ONEX APP on your device.















# Video door entry systems MONITORS DON'T GROW UP 11'S A TRAP auta 16




# neos

# Open your senses

Avant represents the latest generation in video door entry systems standing out for its performance, their avant-garde design and their small size.

With high definition TFT/LCD displays and integrated touch buttons, they are a perfect combination of technology, functionality and aesthetics.





Extra flat design Handsfree Wide LCD. 7" Touch buttons

# Backward compatibility The new neos 7 "is compatible was necessarily to the new neos 7." is compatible was necessarily to the new neos 7." is compatible was necessarily to the new neos 7." is compatible was necessarily to the new neos 7." is compatible was necessarily to the new neos 7." is compatible was necessarily to the new necessarily to the new neos 7." is compatible was necessarily to the new neos 7." is compatible was necessarily to the new neos 7." is compatible was necessarily to the new necessarily to the ne

The new neos 7 "is compatible with all previous digital systems of the AUTA family, regardless of their age, allowing the renovation of the video intercom of a private home independently of the neighborhood.










# e-compact



Measures in mm.

# Access to the future

The handsfree monitor is the most practical solution to communicate without neglecting other tasks, both in the office and at home.

Modern and economical, its extra-flat design and its possibilities for surface or flush mounting, make it a monitor that fits into any environment.


# Extra flat design

Handsfree

LCD color screen panoramic

4,3". 16:9 format

#### Available finishes









# auta Bringing people together



# slim

Talk / Cancel


Self-starting

Call to porter

Mute

# Design in essence

As its name suggests, the Slim video intercom offers an attractive and lightweight design, which integrates the touch buttons on a high-quality screen.



Measures in mm.

Extra flat design

Handsfree

LCD color screen panoramic 4,3"

Touch buttons

Available finishes

( H )






# compact

**MONITOR** 

# Reliable and functional

With a current design that does not go out of style, the Compact monitors and handsets represent the perfect compromise between reliability, simplicity and performance.

The Compact range offers a large number of options, configurations and accessories to perfectly adapt to different needs.



#### INTERCOM





## Sequential self-starting (entry panels and cameras scrolling)

#### Compatibility



The COMPACT INTERCOM monitor is only available for coax/coaxless systems.



auta

COMPACT



## **HANDSET**

## ABS plastic

Ringtone selection


Moor-bell mode. Replaces the flat's door-bell generating a different ringtone

Surface of flush installation with universal box 60 x 60

Audio privacy

Desk converter available





Measures in mm.

# Compatibility





## INTERCOM





# auta Bringing people together

# Wi-Fi system auta free



# Connect with your video door entry from any where

With Auta Free you can divert calls from the video door entry to your mobile phone and attend them from anywhere, as if you were in house: you will see who it is, answer, even open.







DISCOVER THE Wi-Fi AUTA FREE

See video







## **FREE APP**

Available for IOS and ANDROID





- > Easy pairing process with the installed system.
- > Allows up to 2 entry panels.
- > See who is calling your entry panel if you have Wi-Fi, 3G o 4G connectivity.
- > Talk to who rings to your door entry.
- > Door opening option.
- > Receive calls on the mobiles you want.
- > Possibility of controlling several homes with the same APP.
- > Images and video recording.
- > Unlimited IP FREE entry panels and IP FREE monitors

# auta free

# FREE PROX entry panel + FREE IP monitor






CONNECTION **MONITOR** 



Monitor FREE IP



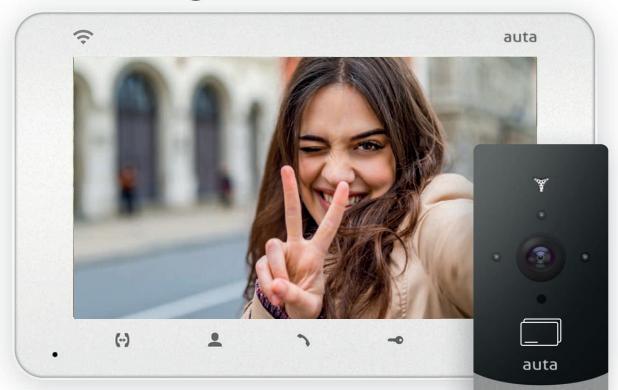



#### 7 "TFT IPS 16: 9 screen

Possibility of expansion with 3 additional monitors (FREE monitor). Total 4 monitors

Image and video recording

Image parameter adjustment; volume, audio and call adjustment and opening time adjustment Intercom system between monitors

Possibility of connecting another additional plate. Total 2 entry panels

CCTV control. Possibility of installing up to two CCTV cameras

Management through Smartphone or Tablet

Integrated 5 dBi antenna

## FREE PROX entry panel



HD video sensor



Wide angle optics up to 145° with **WDR system** 




EM access control



Power supply





Includes all necessary items for its installation: visor and mounting box or surface box

# auta free

# FREE PROX entry panel + FREE IP monitor



# Kit Free Prox IP

#### Composed of:

FREE PROX entry panel

- + FREE IP (Wi-Fi) monitor
- + 12 Vcc 2A power supply
- + entry panel's accessories
- + proximity fob





FREE PROX ENTRY PANEL



FREE IP MONITOR



DESCRIPTION

REF.

751003 KIT FREE PROX IP

> COMPOSITION (660003) FREE PROX ENTRY PANEL (751002) FREE IP MONITOR

# IP SYSTEM ONEX

# Technology, usability and design in equilibrium

AUTA ONEX IP is a FULL IP system based on Class A IP technology. Its wide functionality, the careful design of its components and its advanced technology make it an innovative, versatile and attractive solution, with a perfect balance between technique and aesthetics. Easy to install, highly flexible and highly capable of devices, it incorporates HD video and digital audio for maximum quality communication.






# onex **Onex**

# Specifications

| Wiring                               | UTP CAT5_6 + 2 power wires at the entry panel to supply the door opener             |
|--------------------------------------|---|
| Nr maximum of sections               | 99  |
| Nr maximum of blocks                 | Up to 9 blocks per section. Each block a maximum of 63 floors with 32 monitors each |
| Nr maximum of entry panels per block | 10 per block  |
| Nr maximum of flats                  | 1.796.256   |
| Nr maximum of central guard porters  | 32  |
| Nr maximum of general entry panels   | 32  |
| Maximum distance                     | Unlimited   |
| Entry panel - flat privacy           | Yes   |
| Monitor settings                     | IP auto-assigned  |
| Call structure                       | Nr block / flat - Nr section / block / flat   |
| Voice / text message                 | Possibility of multiple messages to the flats (notifications, alarms,)              |
| Access control integration           | Yes. Built-in MIFARE readers. Wiegand protocol                                      |
| CCTV integration                     | RTSP video stream from the entry panel. Viewing CCTV IP cameras from the monitor.   |

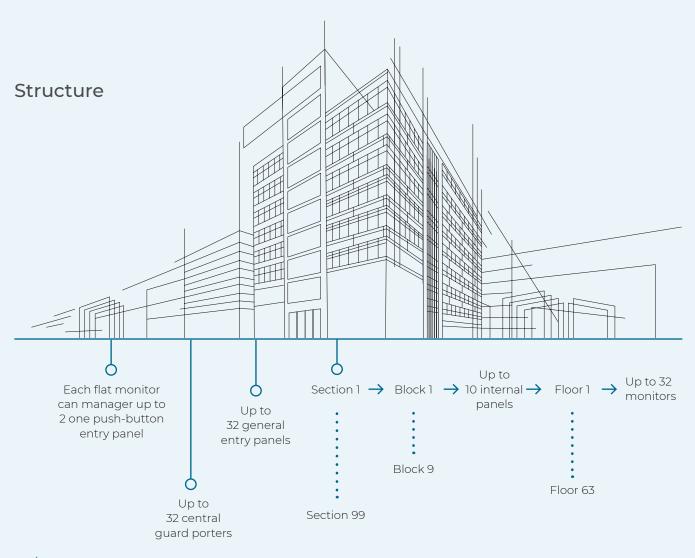



# Components

# auta onex IP

# Universal, minimalist and touch


Designed for a comfortable and dynamic use, the Auta Onex IP monitor presents a minimalist and functional design adaptable to any space, with a contemporary and elegant aesthetic concept.

# 7" screen with touch technology

allows the user an easy and intuitive operation. Full DUPLEX hands-free communication system.

# Monitors Auta ONEX IP allow feeding by Standard 48V PoE,

This means it uses standard 48V PoE switch power and no dedicated power supply is required.



220

Measures in mm.



In addition to answering calls to the home, it also allows you to manage missed calls, view image captures, read messages received by the administrator, view auxiliary cameras, notify alarms on the monitor / concierge and the possibility of managing the security system in the living place.





It allows intercommunication between flats, as well as the dissemination of messages within the same flat.



"Panic" function, allows you to send a panic call to central guard porter.



# **IP SYSTEM** onex

# Components

# **ENTRY PANEL**

# auta onex IP

# **KEYPAD**

# High technology and security

The Auta Onex IP keypad panel integrates the most innovative set of features, with a high definition camera, backlit digital keyboard and multiple advanced access control systems.



#### LCD screen

> 4.3 "16: 9 high contrast multifunction TFT screen.



## HD color camera 2.0 Mpx

- The camera has a high definition image with high brightness LED
- > Adjustable Up / Down, Right / Left 12°.



#### Digital keypad with high level of protection

- > Backlit keyboard with proximity sensor. As you approach the keys they light up.
- > High protection against dust and water.



#### Access control

- > Integrated MiFARE proximity access control reader.
- > Access control by numeric code.
- > Access control via QR code.
- > Door status control with alarm notification.



#### Unibody aluminum entry panel

Panel: 148,5 x 363 x 47 mm Mounting box: 132 x 340 x 50 mm



# Components

# ENTRY PANEL

# auta onex IP

# **PUSH-BUTTON**

# An attractive design and resistant

The Auta Onex IP push-button panel combines performance, versatility, modernity and aesthetics, with extra protection features against external elements and cutting-edge technological accessories.



Backlit push button and card holder.



High protection against dust and water.



Access control

> Built-in MIFARE readers.





HD color camera 0,3 Mpx

- > The camera has a high definition image with high brightness LED lighting.
- > Adjustable Up / Down, Right / Left 12°.



Unibody aluminum entry panel

Dimensions: Panel: 120 x 194 x 44 mm Mounting box: 100 x 175 x 40 mm





# Components

# CENTRAL GUARD PORTER auta onex IP



that allows communication with any entry panel or flat other functions for a comprehensive and simple control of access security.



The central can receive and control the status of the neighborhood community, receiving alarms, calls. It also allows communication with other centrals in the facility.

#### Vigilance and security

Thanks to its user interface, it is possible to see any missed call or panic call and call back to the flat.

#### Total control

Possibility of controlling Auta Onex IP panels and CCTV cameras integrated in the installation.

#### Communication easiness

DUAL audio system, allows handsfree and handset communication.




Ergonomically designed for friendly use, the Auta Onex IP guard porter integrates a large 10.1 "touch screen and capacitive buttons to interact with it intuitively.




Access control user management. Built-in MiFARE reader.



Built-in Pinhole camera.



Measures in mm

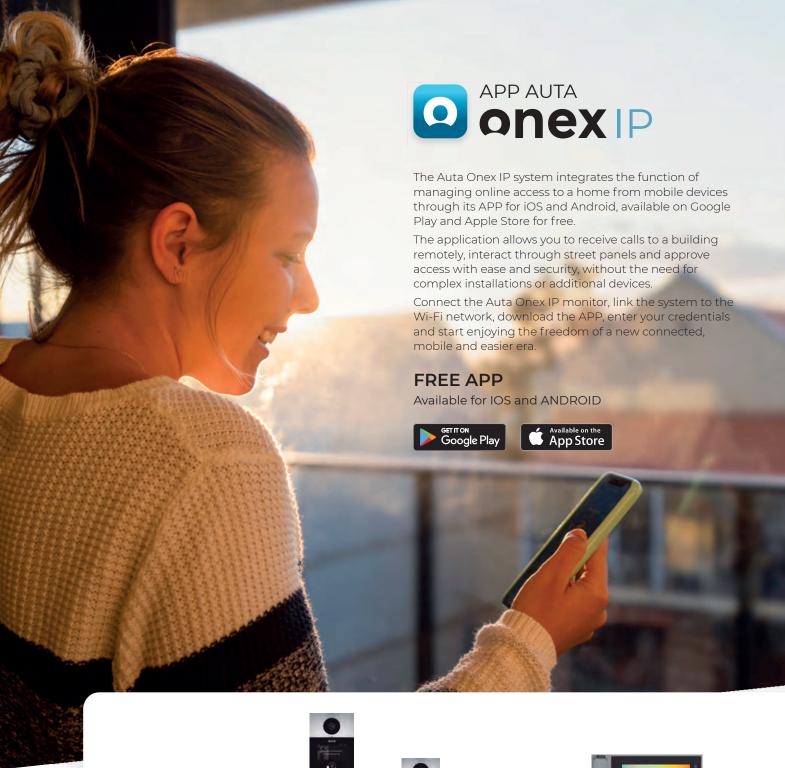

onex



ONEX IP KEYPAD PANEL



ONEX IP PUSH-BUTTON PANEL



ONEX IP MONITOR 7"



CENTRAL GUARD PORTER ONEX IP

REF.

DESCRIPTION

ONEX IP KEYPAD PANEL
ONEX IP PUSH-BUTTON PANEL
ONEX IP MONITOR 7"

CENTRAL GUARD PORTER ONEX IP

auta

# auta Bringing people together



# Entry panels

# compact



# Entry panels

# compact T

D DIGITAL T

A ANALOG T

# SERIES 1

Dimensions: Entry panel: 145 x 130 mm Mounting box: 132 x 122 x 60 mm

# SERIES 2

Dimensions: Entry panel: 215 x 130 mm Mounting box: 203 x 130 x 60 mm















AUTA KEY



VS1



| REF.     |  | DESCRIPTION |
|----------|--|-------------|
| <b>O</b> | A                                      |             |
| 651151   | 851151                                 | FV S1 101   |
| 651161   | 851161                                 | FV S1 201   |
| 651131   | 851131                                 | F S1 101    |
| 651141   | 851141                                 | F S1 201    |
|          | 850101                                 | AUTA KEY    |
| 659100   |  | V S1        |
|          | ······································ |             |
| 651100   | 851100                                 | TS1         |
|          |  |             |

| T S2 201   | T S2 202 | T S2 203   | T S2 204   | TS2 |
|------------|----------|------------|------------|-----|
| <b>D A</b> | O A      | <b>D A</b> | <b>D A</b> | D A |
| •          | • • •    | • • •      |            | 202 |

| REF.     |        | DESCRIPTION |
|----------|--------|-------------|
| <b>D</b> | A      |             |
| 651211   | 851211 | T S2 101    |
| 651212   | 851212 | T S2 102    |
| 651213   | 851213 | T S2 103    |
| 651214   | 851214 | T S2 104    |
| 651221   | 851221 | T S2 201    |
| 651222   | 851222 | T S2 202    |
| 651223   | 851223 | T S2 203    |
| 651224   | 851224 | T S2 204    |
| 651200   | 851200 | T S2        |

# compact T

D DIGITAL T

A ANALOG T

# SERIES 3

Dimensions: Entry panel: 262 x 130 mm Mounting box: 248 x 130 x 60 mm





| REF.     |        | DESCRIPTION |
|----------|--------|-------------|
| <b>D</b> | A      |             |
| 651312   | 851312 | T S3 102    |
| 651313   | 851313 | T S3 103    |
| 651314   | 851314 | T S3 104    |
| 651315   | 851315 | T S3 105    |
| 651316   | 851316 | T S3 106    |
| 651322   | 851322 | T S3 202    |
| 651323   | 851323 | T S3 203    |
| 651324   | 851324 | T S3 204    |
| 651325   | 851325 | T S3 205    |
| 651326   | 851326 | T S3 206    |
|          |        |             |

| T 3 101<br>AUTA KEY       | T S3 201<br>AUTA KEY      | T S3<br>KEYPAD                 | T S3  |
|---------------------------|---------------------------|--------------------------------|-------|
| D A                       | D A                       | D                              | D A   |
| © 2 3 6 2 5 6 2 6 9 0 0 0 | 1 2 3 4 3 6 7 8 9 6 0 0 A | 10 2 3 3 4 5 6 7 8 9 0 0 0 0 0 | and a |

| REF.     |        | DESCRIPTION       |
|----------|--------|-------------------|
| <b>D</b> | Δ      |                   |
| 651301   | 851301 | T S3 101 AUTA KEY |
| 651321   | 855321 | T S3 201 AUTA KEY |
| 651302   |        | T S3 KEYPAD       |
|          |        |                   |
| 651300   | 851300 | T S3              |
|          |        |                   |

# Entry panels

# compact T

D DIGITAL T



# SERIES 4

Dimensions: Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm





| REF.   |        | DESCRIPTION | REF.     |        | DESCRIPTION       |
|--------|--------|-------------|----------|--------|-------------------|
| 0      | A      |             | <b>D</b> | A      |                   |
| 651417 | 851417 | T S4 107    | 655422   | 855422 | T S4 202 AUTA KEY |
| 651418 | 851418 | T S4 108    | 655423   | 855423 | T S4 203 AUTA KEY |
| 651419 | 851419 | T S4 109    | 655424   | 855424 | T S4 204 AUTA KEY |
| 651427 | 851427 | T S4 207    | 651403   |        | T S4 DIRECTORY    |
| 651428 | 851428 | T S4 208    |          |        |                   |
| 651429 | 851429 | T S4 209    | 651400   | 851400 | T S4              |
|        |        |             |          |        |                   |


# compact T

D DIGITAL T



# SERIES 5

Dimensions: Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm

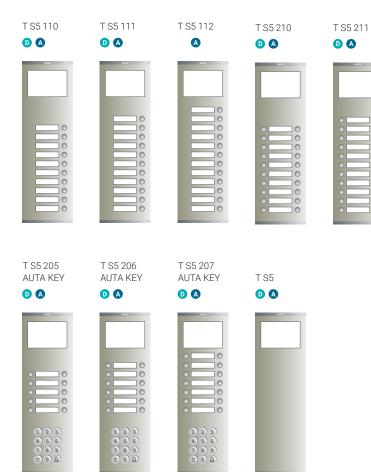

DESCRIPTION

T S5 110 T S5 111

T S5 112

T S5 210

T S5 211

T S5 212

| REF.   |        | DESCRIPTION       |
|--------|--------|-------------------|
| 0      | A      |                   |
| 655525 | 855525 | T S5 205 AUTA KEY |
| 655526 | 855526 | T S5 206 AUTA KEY |
| 655527 | 855527 | T S5 207 AUTA KEY |
|        |        |                   |
| 851500 | 851500 | T S5              |
|        |        |                   |

T S5 212

O A

REF. 0

651530

651531

651540

651541

651542

A

851530

851531 851532

851540

851541

851542

# Entry panels

# compact v

D DIGITAL T/T
A ANALOG T/T

# SERIES 2

Dimensions: Entry panel: 215 x 130 mm Mounting box: 203 x 130 x 60 mm

# T/T S2 101 T/T S2 201 A A

| REF.     |        | DESCRIPTION |
|----------|--------|-------------|
| <b>D</b> | A      |             |
| 652211   | 852211 | T/T S2 101  |
| 652221   | 852221 | T/T S2 201  |
|          |        |             |

# SERIES 3

Dimensions: Entry panel: 262 x 130 mm Mounting box: 248 x 130 x 60 mm



| REF.     |        | DESCRIPTION |
|----------|--------|-------------|
| <b>O</b> | A      |             |
| 652311   | 852311 | T/T S3 101  |
| 652312   | 852312 | T/T S3 102  |
| 652313   | 852313 | T/T S3 103  |
| 652322   | 852322 | T/T S3 202  |
| 652323   | 852323 | T/T S3 203  |
|          |        |             |

# Entry panels

# compact v

D DIGITAL T/T

A ANALOG T/T

# SERIES 4


Dimensions:


Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm


## SERIES 5

Dimensions:

Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm







| T/T S5 209 | KEYPAD                  |
|------------|-------------------------|
| auta       | auta                    |
|            | Н                       |
|            | н                       |
|            | 123                     |
|            | 4 5 6<br>7 8 9<br>0 0 0 |
|            |                         |

T/T/T S5

| REF.     |        | DESCRIPTION         |
|----------|--------|---------------------|
| <b>D</b> | A      |                     |
| 652413   | 852413 | T/T S4 103          |
| 652414   | 852414 | T/T S4 104          |
| 652415   | 852415 | T/T S4 105          |
| 652416   | 852416 | T/T S4 106          |
| 652423   | 852423 | T/T S4 203          |
| 652424   | 852424 | T/T S4 204          |
| 652425   | 852425 | T/T S4 205          |
| 652426   | 852426 | T/T S4 206          |
| 652401   | 852401 | T/T S4 101 AUTA KEY |
| 652402   |        | T/T S4 KEYPAD       |
|          |        |                     |

| REF.     |        | DESCRIPTION     |
|----------|--------|-----------------|
| <b>O</b> | A      |                 |
| 652517   | 852517 | T/T S5 107      |
| 652518   | 852518 | T/T S5 108      |
| 652519   | 852519 | T/T S5 109      |
| 652527   | 852527 | T/T S5 207      |
| 652528   | 852528 | T/T S5 208      |
| 652529   | 852529 | T/T S5 209      |
| 653502   |        | T/T/T S5 KEYPAD |

## D DIGITAL ANALOG

# SERIES 2

Dimensions: Entry panel: 215 x 130 mm Mounting box: 203 x 130 x 60 mm

P S2 105 O A

P S2 106 O A

P S2 107

O A







P S2 205 D A

P S2 206 O A

P S2 207 D A







DESCRIPTION REF. 650215 850215 P S2 105 650216 850216 P S2 106 650217 850217 P S2 107 650225 850225 P S2 205 650226 850226 P S2 206 650227 850227 P S2 207







# SERIES 3

Dimensions: Entry panel: 262 x 130 mm Mounting box: 248 x 130 x 60 mm





| REF.     |        | DESCRIPTION | REF.     |        | DESCRIPTION   |
|----------|--------|-------------|----------|--------|---------------|
| <b>D</b> | A      |             | <b>D</b> | Δ      |               |
| 650314   | 850314 | P S3 104    | 650328   | 850328 | P S3 208      |
| 650315   | 850315 | P S3 105    | 650329   | 850329 | P S3 209      |
| 650316   | 850316 | P S3 106    |          |        |               |
| 650324   | 850324 | P S3 204    |          | 850300 | S3 BLIND      |
| 650325   | 850325 | P S3 205    | 653301   |        | CARDHOLDER S3 |
| 650326   | 850326 | P S3 206    |          |        | <del></del>   |
| 650327   | 850327 | P S3 207    |          |        |               |
|          |        |             |          |        |               |



# SERIES 4

Dimensions: Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm



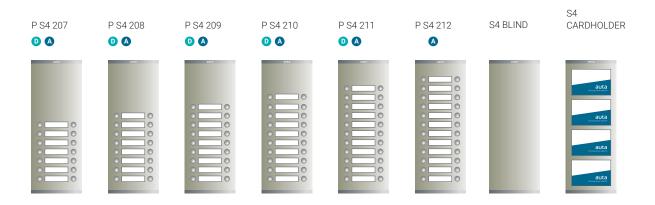

| REF.   |        | DESCRIPTION | REF.   |          | DESCRIPTION   |
|--------|--------|-------------|--------|----------|---------------|
| 0      | A      |             | O      | Δ        |               |
| 650417 | 850417 | P S4 107    | 650441 | 850441   | P S4 211      |
| 650418 | 850418 | P S4 108    |        | 850442   | P S4 212      |
| 650419 | 850419 | P S4 109    |        |          |               |
| 650427 | 850427 | P S4 207    |        | 850400   | S4 BLIND      |
| 650428 | 850428 | P S4 208    | 654401 |          | S4 CARDHOLDER |
| 650429 | 850429 | P S4 209    |        | <u> </u> |               |
| 650440 | 850440 | P S4 210    |        |          |               |
|        |        |             |        |          |               |



# SERIES 5

Dimensions: Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm



# Entry panels

# compact

# **ALPHANUMERIC**

# A different way of dialing

Dial the floor number with the keypad and complete de call dialing the door of the flat. No need to memorize the calling codes or search for names on the push-buttons.



## D DIGITAL

## SERIES 4

Dimensions: Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm

## SERIES 5

Dimensions:

Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm

T S4 103
ALPHANUM

D

T S4 102
ALPHANUM

D

D

T S4 201 T S4 202 ALPHANUM ALPHANUM T S4 203 ALPHANUM







REF. DESCRIPTION

656412 T S4 102 ALPHANUM
656413 T S4 103 ALPHANUM
656421 T S4 201 ALPHANUM
656422 T S4 202 ALPHANUM
656423 T S4 203 ALPHANUM

T S5 104 T S5 105 T S5 106 ALPHANUM ALPHANUM ALPHANUM 0 0 TS5204 T S5 205 T S5 206 ALPHANUM ALPHANUM ALPHANUM 0 0 0



REF. DESCRIPTION

656514 T S5 104 ALPHANUM
656515 T S5 105 ALPHANUM
656516 T S5 106 ALPHANUM
656524 T S5 204 ALPHANUM
656525 T S5 205 ALPHANUM
656526 T S5 206 ALPHANUM



Surface box COMPACT



Mounting box COMPACT



Rain shield

DESCRIPTION

## SERIES 1

| 509021                     | MOUNTING BOX SERIES 1  |
|----------------------------|--|
| 730501                     | RAIN SHIELD COMPACT SERIES 1   |
| 730520<br>730521           | SURFACE BOX WITH RAIN SHIELD COMPACT SERIES 1<br>SURFACE BOX COMPACT SERIES 1  |
| 730541                     | BOX WITH ANGLE COMPACT SERIES 1  |
| 730560<br>730561<br>730575 | FRAME COMPACT SERIES 1 (KF) 175 x 155 mm FRAME COMPACT SERIES 1 (0) 175 x 155 mm FRAME COMPACT SERIES 1 UNIVERSAL 275 x 155 mm |

# SERIES 2

| 509022                     | MOUNTING BOX SERIES 2  |
|----------------------------|--|
| 730502<br>730516<br>730517 | RAIN SHIELD COMPACT SERIES 2<br>RAIN SHIELD COMPACT SERIES 2 (2 ENTRY PANELS)<br>RAIN SHIELD COMPACT SERIES 2 (3 ENTRY PANELS) |
| 730522<br>730532           | SURFACE BOX COMPACT SERIES 2<br>SURFACE BOX WITH RAIN SHIELD COMPACT SERIES 2  |
| 730542                     | BOX WITH ANGLE COMPACT SERIES 2  |
| 730562<br>730563<br>730577 | FRAME COMPACT SERIES 2 (KV) 275 x 155 mm FRAME COMPACT SERIES 2 (1) 275 x 155 mm FRAME COMPACT SERIES 2 (2P) 360 x 155 mm      |

# SERIES 3

| 509023                     | MOUNTING BOX SERIES 3   |
|----------------------------|---|
| 730503                     | RAIN SHIELD COMPACT SERIES 3  |
| 730510                     | RAIN SHIELD COMPACT SERIES 3 (2 ENTRY PANELS)   |
| 730511                     | RAIN SHIELD COMPACT SERIES 3 (3 ENTRY PANELS)   |
| 730523                     | SURFACE BOX COMPACT SERIES 3  |
| 730533                     | SURFACE BOX WITH RAIN SHIELD COMPACT SERIES 3   |
| 730543<br>730550<br>730551 | BOX WITH ANGLE COMPACT SERIES 3 BOX WITH ANGLE COMPACT SERIES 3 (2 entry panels) BOX WITH ANGLE COMPACT SERIES 3 (3 entry panels) |
| 730564                     | FRAME COMPACT SERIES 3 (2P) 360 x 155 mm  |
| 730570                     | FRAME COMPACT SERIES 3 - (2 PANELS) 440 x 295 mm  |



Box with angle COMPACT

EF. DESCRIPTION

# SERIES 4

| 509024                               | MOUNTING BOX SERIES 4   |
|--------------------------------------|---|
| 730504<br>730512<br>730513           | RAIN SHIELD COMPACT SERIES 4 RAIN SHIELD COMPACT SERIES 4 (2 ENTRY PANELS) RAIN SHIELD COMPACT SERIES 4 (3 ENTRY PANELS)  |
| 730524<br>730534                     | SURFACE BOX COMPACT SERIES 4<br>SURFACE BOX WITH RAIN SHIELD COMPACT SERIES 4   |
| 730544<br>730552<br>730553           | BOX WITH ANGLE COMPACT SERIES 3 BOX WITH ANGLE COMPACT SERIES 3 (2 entry panels) BOX WITH ANGLE COMPACT SERIES 3 (3 entry panels)   |
| 730565<br>730566<br>730571<br>730573 | FRAME COMPACT SERIES 4 (2P) 360 x 155 mm FRAME COMPACT SERIES 4 (2G) 430 x 155 mm FRAME COMPACT SERIES 4 - 2 PANELS (4) 440 x 295 mm FRAME COMPACT SERIES 4 - 2 PANELS (5) 440 x 375 mm |

# SERIES 5

| 509025                     | MOUNTING BOX SERIES 4  |
|----------------------------|--|
| 730505<br>730514<br>730515 | RAIN SHIELD COMPACT SERIES 5<br>RAIN SHIELD COMPACT SERIES 5 (2 ENTRY PANELS)<br>RAIN SHIELD COMPACT SERIES 5(3 ENTRY PANELS)                  |
| 730525<br>730535           | SURFACE BOX COMPACT SERIES 5<br>SURFACE BOX WITH RAIN SHIELD COMPACT SERIES 5  |
| 730545<br>730554<br>730555 | BOX WITH ANGLE COMPACT SERIES 5 BOX WITH ANGLE COMPACT SERIES 5 (2 entry panels) BOX WITH ANGLE COMPACT SERIES 5 (3 entry panels)              |
| 730568<br>730572<br>730574 | FRAME COMPACT SERIES 5 (2G) 430 x 155 mm FRAME COMPACT SERIES 5 - 2 PANELS (4) 440 x 295 mm FRAME COMPACT SERIES 5 - 2 PANELS (5) 440 x 375 mm |



# Entry panels stainless steel



# Entry panels

# stainless steel



# SERIES 1

Dimensions: Entry panel: 145 x 130 mm Mounting box: 132 x 122 x 60 mm

V S1 AUTA KEY CARDHOLDER

- auta

REF. DESCRIPTION

D

A

XX0102 V S1
940100 AUTA KEY
770103 CARDHOLDER S1

XX1111 941111 F S1 101 XX1121 941121 F S1 201

DESCRIPTION

F S1 201

# AUDIO + VIDEO

A

AUDIO

F S1 101

D A

REF.

O

FV S1 101 FV S1 201





REF. DESCRIPTION

**XX7111** FV S1 101 **XX7121** FV S1 201

The first 2 digits of the reference (XX1301) must be replaced depending on the system chosen for the installation  $\,$ 

COAX SYSTEM 77 VISUALTECH SYSTEM 79 COAXLESS SYSTEM 78







## SERIES 2

Dimensions: Entry panel: 215 x 130 mm Mounting box: 203 x 130 x 60 mm

## AUDIO

F S2 101



F S2 201



F S2 102



F S2 103



AUDIO + VIDEO

FV S2 101



FV S2 102



FV S2 103



FV S2 202





F S2 202 **D A** 



F S2 203



REF.

691211 691221 XX1212 941212 XX1213 941213 XX1222 941222 XX1223 941223 DESCRIPTION

F S2 101 F S2 201 F S2 102 F S2 103 F S2 202

F S2 203

FV S2 203





REF.

XX7211 XX7212 XX7213 XX7222 XX7223 DESCRIPTION

FV S2 101 FV S2 102 FV S2 103

FV S2 202 FV S2 203

 $The first \ 2 \ digits \ of \ the \ reference \ (XX1301) \ must \ be \ replaced \ depending \ on \ the \ system \ chosen \ for \ the \ installation$ 



# SERIES 3

Dimensions: Entry panel: 262 x 130 mm Mounting box: 248 x 130 x 60 mm

## AUDIO

FS3 KEYPAD F S3 101 AUTA KEY D A





F S3 205

D A

FS3

DIRECTORY





FS3 104







F S3 204

D A



| REF.     |        | DESCRIPTION       |
|----------|--------|-------------------|
| <b>O</b> | A      |                   |
| XX1301   |        | F S3 KEYPAD       |
| XX1302   | 941302 | F S3 101 AUTA KEY |
| XX1303   |        | F S3 DIRECTORY    |
| XX1314   | 941314 | F S3 104          |
| XX1315   | 941315 | F S3 105          |
| XX1324   | 941324 | F S3 204          |
| XX1325   | 941325 | F S3 205          |

## AUDIO + VIDEO

FV S3 KEYPAD





FV S3 101

AUTA KEY



FV S3

DIRECTORY



FV S3 104

FV S3 105 0





FV S3 204



FV S3 205

DESCRIPTION

XX7301 XX7302 XX7303 XX7314 XX7315 XX7324 XX7325

REF.

**D** 

FV S3 KEYPAD FV S3 101 AUTA KEY FV S3 DIRECTORY FV S3 104 FV S3 105 FV S3 204 FV S3 205





## SERIES 4

Dimensions: Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm

## AUDIO

FS4106 O A



FS4107 O A



F S4 108



F S4 206



AUDIO + VIDEO

FV S4 106



FV S4 107



FV S4 108





FV S4 206

O

F S4 207 **D A** 



F S4 208





FV S4 207



FV S4 208



FV/T S4 KEYPAD



FV/T S4 DIRECTORY 0



REF. DESCRIPTION XX1416 941416 F S4 106 XX1417 941417 F S4 107 XX1418 941418 F S4 108 XX1426 941426 F S4 206 XX1427 941427 F S4 207 XX1428 941428 F S4 208

REF.

0 XX7416 XX7417 XX7418 XX7426 XX7427 XX7428 XX8401 XX8403 DESCRIPTION

FV S4 106 FV S4 107 FV S4 108 FV S4 206 FV S4 207 FV S4 208 FV/T S4 KEYPAD FV/T S4 DIRECTORY

The first 2 digits of the reference (XX1301) must be replaced depending on the system chosen for the installation

COAX SYSTEM COAXLESS SYSTEM 77 78 VISUALTECH SYSTEM 2 WIRES SYSTEM

69

FV S3 DIRECTORY is NOT available for the 2 wires and Visualtech system.





FV S5 209

0

# SERIES 5

Dimensions: Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm

## AUDIO

F S5 109

# O A





F S5 111



FS5 209 O A







REF.

XX7519 XX7520

XX7521

XX7529 XX7530

XX7531

XX8501

AUDIO + VIDEO

FV S5 109

FV S5 211

0

FV S5 110





FV S5 111



DESCRIPTION

FV S5 109

FV S5 110

FV S5 111 FV S5 209

FV S5 210

FV S5 211

FV/T S5 KEYPAD



|     |               |   | ٠ | ٠ | ٠ | ٠  |     |
|-----|---------------|---|---|---|---|----|-----|
|     |               |   | ٠ | ٠ | ٠ | ٠  |     |
|     |               |   | ٠ | ٠ |   | ٠  |     |
|     |               |   | • | ٠ | • | ٠  |     |
|     |               | • | ٠ | • | ٠ | •  | •   |
|     |               |   |   |   |   |    |     |
|     |               |   |   |   |   |    |     |
|     |               |   |   |   |   |    |     |
| 480 | _             | _ | _ | _ | - |    |     |
| (3) |               |   |   |   |   | и  | య   |
|     |               |   |   |   |   |    |     |
| Ø.  | $\overline{}$ | - | - | - | - | 14 | 60  |
| w   | _             | _ | _ | _ | _ | K  | Ø.  |
|     |               |   |   |   |   |    |     |
| Ø.  | $\overline{}$ | _ | _ | _ | 7 | В  | •   |
| w   | _             | _ | - | _ | - | в  | o.  |
|     |               |   |   |   |   |    | ъ.  |
| Ø3  | $\overline{}$ |   | _ |   | П | и  | 50. |
| 0   | _             | - | - | - | - | В  | o   |
| -   |               |   |   |   |   |    | 91  |
|     |               |   |   |   |   |    |     |

F S5 210

**D A** 



F S5 211

| REF.     |        | DESCRIPTION |
|----------|--------|-------------|
| <b>D</b> | A      |             |
| XX1519   | 941519 | F S5 109    |
| XX1520   | 941520 | F S5 110    |
| XX1521   | 941521 | F S5 111    |
| XX1529   | 941529 | F S5 209    |
| XX1530   | 941530 | F S5 210    |
| XX1531   | 941531 | F S5 211    |

The first 2 digits of the reference (XX1301) must be replaced depending on the system chosen for the installation

COAX SYSTEM COAXLESS SYSTEM

77 78 VISUALTECH SYSTEM 2 WIRES SYSTEM

79 69



## SERIES 3

Dimensions: Entry panel: 262 x 130 mm Mounting box: 248 x 130 x 60 mm










| REF.   |        | DESCRIPTION   |
|--------|--------|---------------|
| O      | A      |               |
| 773314 | 943314 | P S3 104      |
| 773315 | 943315 | P S3 105      |
| 773323 | 943323 | P S3 203      |
| 773324 | 943324 | P S3 204      |
| 773325 | 943325 | P S3 205      |
| 773326 | 943326 | P S3 206      |
| 773327 | 943327 | P S3 207      |
| 773328 | 943328 | P S3 208      |
|        | 946300 | S3 CARDHOLDER |
|        |        |               |


| REF.   |        | DESCRIPTION |
|--------|--------|-------------|
| O      | A      |             |
| 776314 | 943314 | T/P S3 104  |
| 776315 | 946315 | T/P S3 105  |
| 776323 | 946323 | T/P S3 203  |
| 776324 | 946324 | T/P S3 204  |
| 776325 | 946325 | T/P S3 205  |




## SERIES 4

Dimensions: Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm












| REF.     |        | DESCRIPTION |
|----------|--------|-------------|
| <b>D</b> | A      |             |
| 776416   | 946416 | T/P S4 106  |
| 776417   | 946417 | T/P S4 107  |
| 776418   | 946418 | T/P S4 108  |
| 776426   | 946426 | T/P S4 206  |
| 776427   | 946427 | T/P S4 207  |
| 776428   | 946428 | T/P S4 208  |






# SERIES 5

Dimensions: Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm



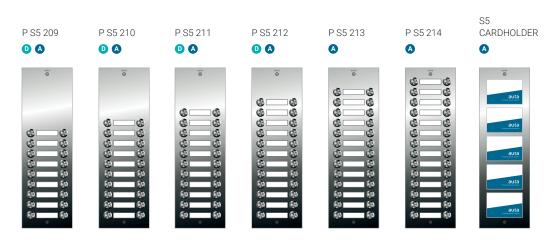


| REF.     |        | DESCRIPTION | REF. |        | DESCRIPTION    |
|----------|--------|-------------|------|--------|----------------|
| <b>D</b> | A      |             |      | A      |                |
| 773519   | 943519 | P S5 109    |      | 943533 | P S5 213       |
| 773520   | 943520 | P S5 110    |      | 943534 | P S5 214       |
| 773521   | 943521 | P S5 111    |      | 046500 | OF OARRIJOLDER |
| 773529   | 943529 | P S5 209    |      | 946500 | S5 CARDHOLDER  |
| 773530   | 943530 | P S5 210    |      |        |                |
| 773531   | 943531 | P S5 211    |      |        |                |
| 773532   | 943532 | P \$5 212   |      |        |                |



# SERIES 5

Dimensions: Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm









D DIGITAL

## SERIES 4

Dimensions: Entry panel: 330 x 130 mm Mounting box: 319 x 130 x 60 mm

## **AUDIO**

F S4 102 ALPHANUM



F S4 103 ALPHANUM



F S4 201 ALPHANUM



F S4 202

ALPHANUM

## AUDIO + VIDEO

FV S4 102 ALPHANUM



FV S4 103 ALPHANUM



FV S4 201 ALPHANUM



FV S4 202 ALPHANUM





F S4 203 ALPHANUM

0



FV S4 203 ALPHANUM





REF. DESCRIPTION

XX0412 XX0413 XX0421 XX0422 XX0423 F S4 102 ALPHANUM F S4 103 ALPHANUM F S4 201 ALPHANUM F S4 202 ALPHANUM F S3 201 ALPHANUM REF.

XX5412 XX5413 XX5421 XX5422 XX5423 DESCRIPTION

FV S4 102 ALPHANUM FV S4 103 ALPHANUM FV S4 201 ALPHANUM FV S4 202 ALPHANUM FV S3 203 ALPHANUM

The first 2 digits of the reference (XX1301) must be replaced depending on the system chosen for the installation

COAX SYSTEM
COAXLESS SYSTEM

77 78 VISUALTECH SYSTEM 2 WIRES SYSTEM

79 69



# SERIES 5

Dimensions: Entry panel: 400 x 130 mm Mounting box: 390 x 130 x 60 mm

## **AUDIO**

F S5 104 ALPHANUM



F S5 105









F S5 205 F S5 206 ALPHANUM ALPHANUM





DESCRIPTION 0 XX0514 F S5 104 ALPHANUM F S5 105 ALPHANUM XX0515 F S5 106 ALPHANUM XX0516 XX0524 F S5 204 ALPHANUM F S5 205 ALPHANUM XX0525 XX0526 F S5 206 ALPHANUM

## AUDIO + VIDEO

FV S5 104 ALPHANUM



FV S5 105





FV S5 106

ALPHANUM



FV S5 204

ALPHANUM

FV S5 205 ALPHANUM







FV S5 206

ALPHANUM

REF. O XX5514 XX5515 XX5516 XX5524 XX5525 XX5526 DESCRIPTION

FV S5 104 ALPHANUM FV S5 105 ALPHANUM FV S5 106 ALPHANUM FV S5 204 ALPHANUM FV S5 205 ALPHANUM FV S5 206 ALPHANUM

The first 2 digits of the reference (XX1301) must be replaced depending on the system chosen for the installation

COAX SYSTEM COAXLESS SYSTEM

77 78 VISUALTECH SYSTEM 2 WIRES SYSTEM

79 69

# Entry panels

# stainless steel

# Design on steel

The elegant design of Auta's stainless steel plates houses in its interior the most advanced technology and protects it to ensure its durability.



Multiple configurations: pushbuttons, keypad, directory and access control.



Made of 2,5m thick stainless steel.



Gloss finishing, hand polished.



Retro-illuminated single or double cardholders. IP65 stainless Steel push-buttons.



Vandal proof screws.







# Systems











ΛΝΛLOG



# Systems compatibility

ENTRY PANELS

### MONITORS/ HANDSETS

















compact

FLUSH SURFACE

AUDIO

AUDIO/VIDEO

compact ALPHANUMERIC

FLUSH

AUDIO

SURFACE

AUDIO/VIDEO

stainless steel

FLUSH

AUDIO

SURFACE

AUDIO/VIDEO

stainless steel

ALPHANUMERIC

FLUSH SURFACE AUDIO AUDIO/VIDEO neos

SURFACE DESK MOUNT AUDIO AUDIO/VIDEO

compact

SURFACE DESK MOUNT AUDIO AUDIO/VIDEO

| 2W<br>twowires        | $\bigcirc$ |            | $\bigcirc$ | COMING SOON  |              |
|-----------------------|------------|------------|------------|--------------|--------------|
| VISUAL<br>TECH        |            |            |            |              | $\bigcirc$   |
| PLUG<br>PLAY<br>/ ISO |            |            |            |              |              |
| COAX  COAXLESS        |            |            |            |              |              |
| INTERCOM              |            |            |            |              |              |
| ΛΝΛLOG                |            | $\bigcirc$ |            | HANDSET ONLY | HANDSET ONLY |



CENTRAL GUARD PORTERS















| COMPact<br>INTERCOM                           | onex Wi-Fi                                    | avant<br>INTERCOM                             | e-compact                                     | slim  | guard<br>porter<br>cci guard<br>porter | guard<br>porter<br>cca guard<br>porter |
|---|---|---|---|---|--|--|
| SURFACE<br>DESK MOUNT<br>AUDIO<br>AUDIO/VIDEO | SURFACE<br>FLUSH<br>DESK MOUNT<br>AUDIO/VIDEO | SURFACE<br>FLUSH<br>DESK MOUNT<br>AUDIO/VIDEO | SURFACE<br>FLUSH<br>DESK MOUNT<br>AUDIO/VIDEO | SURFACE<br>FLUSH<br>DESK MOUNT<br>AUDIO/VIDEO | SURFACE<br>DESK MOUNT<br>AUDIO/VIDEO   | SURFACE<br>DESK MOUNT<br>AUDIO         |
|   |   |   |   |   |  |  |
|   |   |   |   |   |  |  |
|   |   |   |   |   |  |  |
|   |   |   |   |   |  |  |
|   |   |   |   |   |  |  |
|   |   |   |   |   |  |  |



# System

Pure 2-wire system. System without polarity. Complete modulation of signals. Maneuver without latencies.

# Entry panels

compact

compact ALPHANUMERIC

stainless steel

stainless steel

ALPHANUMERIC













# Monitors & handsets

neos

MONITORS

HANDSET

slim



compact

MONITOR

HANDSET



COMING SOON







Anodized aluminum Quality and resistance Semi-modulars Versatile: audio, audio/video & access control Surface or flush mounted Maximum benefits

# stainless steel

Stainless Steel IP-65 push-buttons Robustness and durability 5 sizes Maximum performance Customizable in size and push-button location

# SERIES 1/2/3/4/5



# SERIES 1/2/3/4/5



## **ALPHANUMERIC**

## SERIES 4/5



Series 5


## **ALPHANUMERIC**

## SERIES 4/5



Series 4







## MODULES FOR BUILDINGS

REF.

DESCRIPTION



2 WIRES AUDIO MODULE 508004

Audio module for 2H digital systems. Incorporates 2H video management that allows future extensions of the system. Compatible with COMPACT entry panels.



2 WIRES AUDIO/VIDEO MODULE 508001

> Audio and video module for 2H digital systems. Compatible with COMPACT entry panels.

## PANEL AUXILIARY MODULES

REF.

509018

DESCRIPTION



CARDHOLDER MODULE (DC)

Panoramic retro-illuminated card module.

It allows incorporating any type of information deemed necessary into street signs. Compatible with COMPACT entry panels. 24Vdc power supply.

### MODULES OF CONTROL AND ACCESSORIES

REF.

600019

DESCRIPTION



2 WIRES MODULE OF CONTROL

Digital control module for AUDIO and AUDIO / VIDEO 2H systems. Independent management of up to 2 doors with free opening. Door sensor management. Management of auxiliary opening buttons. Possibility of selecting opening times. It incorporates access control with up to an individual opening code per dwelling as well as 4 general codes. Automatic management of plates only push button, keyboard + display entry panels



2 WIRES ALPHANUMERIC MODULE OF CONTROL 600020

> Digital module of control for AUDIO and AUDIO / VIDEO 2H systems. Allows direct dialing using the floor + letter number of the house. It allows to dispense plates repertoire. Management of mixed boards (Display + Pushbuttons), as well as ONLY PUSHBUTTONS where the choice of the buttons for the floor number and the letters of the houses is free. It incorporates the same features as the 600019 module.



600002 **CONNECTION MODULE OF ROWS & COLUMNS** 

MINI

Allows the link of push-button digital entry panels. Lighting Management. Compatible with all digital systems. Up to 3 entry panels with 66 push-buttons.



KEYPAD

DESCRIPTION

730165 KEYPAD MINI

> Portable keyboard that allows the configuration of internal parameters in the module of control. It also allows the management of the user database in those who have this function



# neos

# **MONITORS**

## HANDSFREE + HANDSET

Dimensions: 185 x 155 x 24 mm Finishes: White & Black Installation: Surface LCD 4,3" format 16:9

## **HANDSFREE**

Dimensions: 125 x 155 x 24 mm Finishes: White & Black Installation: Surface LCD 4,3" format 16:9



HANDSFREE

White

NEOS

White

HANDSFREE

+ HANDSET



NEOS HANDSFREE + HANDSET Black

COMING SOON





HANDSFREE Black



NEOS HF monitor desk converter



**NEOS HANDSET** monitor desk converter

REF.

751813 751823 751817

751827

0

0

751899 730186 730187

DESCRIPTION

2 WIRES WHITE HANDSET NEOS MONITOR 2 WIRES BLACK HANDSET NEOS MONITOR 2 WIRES WHITE HANDSFREE NEOS MONITOR 2 WIRES BLACK HANDSFREE NEOS MONITOR

NEOS MONITOR WALL BRACKET NEOS HANDSFREE MONITOR DESK CONVERTER NEOS HANDSET MONITOR DESK CONVERTER

# neos

## **HANDSETS**

Dimensions: 90 x 155 x 36 (base + handset) 90 x 116 x 23 (only base) Finishes: White & Black Installation: Surface with universal box 60x60





**NEOS** HANDSET White



**NEOS** HANDSET Black

REF.

701814  $\bigcirc$ 701824

730184 0 730185

DESCRIPTION

2 WIRES WHITE NEOS HANDSET 2 WIRES BLACK NEOS HANDSET

WHITE FRAME FOR NEOS HANDSET **BLACK FRAME FOR NEOS HANDSET** 



# slim

## **MONITORS**

Dimensions: 178 x 146 x 30 (surface) 178 x 146 x 7 (flush) Finishes: White Design: Extra-flat Touch buttons LCD 4,3" screen panoramic



SLIM MONITOR White

REF. DESCRIPTION

2 WIRES SLIM MONITOR 751502 0

750920 SLIM MONITOR PLATE

Surface mounting plate

SLIM MONITOR MOUNTING BOX 750921

Flush mounting box (W 179 x H 152 x D 35 mm.)

750927 SLIM MONITOR FRAME Flush mounting frame

750928  $\circ$ SLIM MONITOR NON-CONVENTIONAL FIXING

For non conventional fixing; wood, etc. Includes de frame (black or white color).

SLIM MONITOR DESK CONVERTER



SLIM monitor desk converter

750923



## **MONITORS**

Finishes: White Installation: Surface LCD 4,3" panoramic screen



DESCRIPTION

COMPACT MONITOR White

755005  $\circ$  2 WIRES DIGITAL COMPACT MONITOR Digital technology. Installation 2 wires without.

750699

CONNECTION BRACKET FOR 2 WIRES COMPACT MONITOR

Digital technology. Installation 2 wires without polarity.

750799

2 WIRES PLUS CONNECTION BRACKET

For 2-wire monitors without polarity. Connection module with additional functions, remote door opener or auxiliary doorbell.

730482

COMPACT MONITOR DESK CONVERTER



COMPACT monitor desk converter

# compact

## **HANDSETS**

Finishes: White Installation: Surface



COMPACT HANDSET White

DESCRIPTION



COMPACT handset desk converter

705005

507030

Digital technology. Installation 2 wires without polarity.

COMPACT MONITOR DESK CONVERTER

2 WIRES COMPACT HANDSET







715703





730168

730145



715503



730171



753298



730213



730174

#### **POWER SUPPLY**

ALV-1,5 A POWER SUPPLY UNIT 715303

DESCRIPTION

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 1.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 30 monitors and 50 telephones or 3 elements with simultaneous call. It can be installed on the surface or by DIN rail (3 elements)

ALV-2,5 A POWER SUPPLY UNIT 715703

> Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 2.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 50 monitors and 100 telephones or 5 elements with simultaneous call. It can be installed on the surface or by DIN rail (4 elements)

730168 2 WIRES POWER INJECT

> Power injector for 2 WIRES systems. It has 2 operating modes. INJECTOR MODE (FACTORY): Installed next to the system feeder. SECTIONER MODE: It is used to place reinforcement feeders in the same line.

730145 **BATTERY MANAGER** 

> It allows to connect some batteries to maintain permanent power in the installation, to the following power supplies: 715303 and 715703.

715503 ATF-12 POWER SUPPLY UNIT

Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS. It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2 elements)

#### COMMUNICATIONS

REF. DESCRIPTION

730171 2 WIRES SYSTEM ROUTER

> It allows the realization of multiple entry panel and riser 2 WIRES installations. It allows to apply several routers in the same.

#### **AUDIO & VIDEO**

REF. DESCRIPTION

2 WIRES MINI DISTRIBUTOR 753298

Distributor for 2 WIRES systems. It has 4 outputs. Dimensions: 40 x 43 x 22 mm

#### **ACCESSORIES**

DESCRIPTION

730213 12V MINI RELAY

12V relay. Universal. Allows the connection of normally open normally closed circuits.

#### **BUZZERS**

DESCRIPTION

730174 WIRELESS BUZZER HEB KIT

> Allows the call extension of the monitor/handset. Wireless. Up to 200m a open field. Emission frequency 868 Mhz that allows good reception. 32 selectable melodies. Up to 30 receivers in the same apartment/house.

# VISUAL TECH

# System

Ideal for renovation.

Use of existing wiring in the installation. Without works.

Quick and easy installation.



## Entry panels

compact

compact ALPHANUMERIC

stainless steel

stainless steel











# VISUAL **TECH**

### Monitors & handsets

**Guard Porter** 

#### neos

MONITORS HANDSET









### onex Wi-Fi





slim

### compact

MONITOR HANDSET





Available in:





NEOS 7" only available in black color.



# compact

Anodized aluminum Quality and resistance Semi-modulars Versatile: audio, audio/video & access control Surface or flush mounted Maximum benefits

#### Stainless Steel IP-65 push-buttons Robustness and durability

5 sizes Maximum performance Customizable in size and push-button location

stainless steel

#### SERIES 1/2/3/4/5



#### SERIES 1/2/3/4/5



#### **ALPHANUMERIC**

#### SERIES 4/5



#### **ALPHANUMERIC**


#### SERIES 4/5



Series 4

Series 5







#### MODULES FOR BUILDINGS

REF.

DESCRIPTION



#### 509052 VISUALTECH AUDIO MODULE

Audio module for VISUALTECH systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels



#### 509066 VISUALTECH COLOR AUDIO/VIDEO MODULE

Audio and video module for VISUALTECH systems. Compatible COMPACT door entry panels.

#### **MODULES FOR SI ENTRY PANELS**

REF.

DESCRIPTION



#### 509080 VISUALTECH AUDIO MODULE FOR KIT S1

Audio module for VISUALTECH systems with built-in module of control. It incorporates COAXLESS video management that allows future extensions of the system.

Allows Switchboard Unit. Compatible with COMPACT SERIES 1 door entry panels. Management of up to 2 independent calls.



#### 509075 VISUALTECH COLOR AUDIO/VIDEO MODULE FOR KIT S1

Audio/Video module for VISUALTECH systems with built-in module of control. Allows Switchboard Unit. Compatible with COMPACT SERIES 1 door entry panels. Management of up to 2 independent calls.

#### PANEL AUXILIARY MODULES

REF.

DESCRIPTION



#### 509018 CARDHOLDER MODULE (DC)

Panoramic retro-illuminated card module. It allows incorporating any type of information deemed necessary into street signs. Compatible with COMPACT entry panels. 24Vdc power supply.



#### 509048 DIGITAL ADAPTED MODULE

Panoramic retro-illuminated card module. Shows system information to people with hearing impairment. Compatible with COMPACT entry panels and DIGITAL systems.



#### 509011 COLOR COAXLESS DECOR VIDEO MODULE

Color module of coaxless and P&P systems. Compatible with COMPACT y DECOR entry panels. Allows installation with B&W monitors.



#### MODULE OF CONTROL AND ACCESSORIES

REF.

DESCRIPTION



#### 600011 VISUALTECH MODULE OF CONTROL

Digital control module for AUDIO and AUDIO / VIDEO VISUALTECH systems. Central Guard Porter Management. Can manage up to 63 buildings and 16.000 apartments. Door sensor management. Management of auxiliary opening buttons. Possibility of selecting opening times. It incorporates access control with up to an individual opening code per dwelling as well as 4 general codes. Automatic management of plates only push button, keyboard + display entry panels.



#### 600017 ALPHANUMERIC VISUALTECH MODULE OF CONTROL

Digital control module for AUDIO and AUDIO / VIDEO VISUALTECH systems. Allows the direct deal as floors number and apartment letter.

Can manage push-buttons & display entry panels and push-button ONLY entry panels. Same benefits as 600011.



#### 600002 **CONNECTION MODULE OF ROWS & COLUMNS**

Allows the link of push-button digital entry panels. Lighting Management. Compatible with all digital systems. Up to 3 entry panels with 66 push-buttons.



#### 600015 MULTI-MODULE OF CONTROL

Allows the connection of several modules of control wit ONE AUDIO or AUDIO/VIDEO module. Allows more than 3 entry panels and 66 push-buttons. Compatible with all digital systems.



KEYPAD

MINI

REF. DESCRIPTION

730165

#### KEYPAD MINI

Portable keyboard that allows the configuration of internal parameters in the module of control. It also allows the management of the user database in those who have this function

# neos

HANDSFREE + HANDSET



HOW TO INSTALL THE MONITORS?

See video



# To choose the way to answer



#### Handset...

To respond without others listening the conversation.



### .. or handsfree

To response even with busy hands.





Easy and intuitive navigation High quality sound LCD 4,3" screen, format 16:9 Touch buttons

Induction loop amplification system (Teleloop)





### Monitors

# neos

### VISUALTECH

#### HANDSFREE + HANDSET

Dimensions: 185 x 155 x 24 mm Finishes: White & Black Installation: Surface LCD 4,3" format 16:9



**NEOS** HANDSFREE + HANDSET White



**NEOS** HANDSFREE + HANDSET Black

#### **HANDSFREE**

Dimensions: 125 x 155 x 24 mm Finishes: White & Black Installation: Surface LCD 4,3" format 16:9



HANDSFREE White



HANDSFREE Blank



Frame HF / NEOS 7 monitor



NEOS HF monitor desk converter



NEOS HANDSET monitor desk converter

REF.

751810 0 751820 751814 0 751824

751899 730186 730187

730188 730189 730190  $\circ$ 730191  $\circ$  DESCRIPTION

VISUALTECH WHITE HANDSET NEOS MONITOR VISUALTECH BLACK HANDSET NEOS MONITOR VISUALTECH WHITE HANDSFREE NEOS MONITOR VISUALTECH BLACK HANDSFREE NEOS MONITOR

NEOS MONITOR WALL BRACKET NEOS HANDSFREE MONITOR DESK CONVERTER NEOS HANDSET MONITOR DESK CONVERTER

BLACK FRAME HANDSET NEOS MONITOR 220 X 200 BLACK FRAME HF / NEOS 7 NEOS MONITOR 220 X 200 WHITE FRAME HANDSET NEOS MONITOR 220 X 200 WHITE FRAME HF / NEOS 7 NEOS MONITOR 220 X 200





#### HANDSFREE

Dimensions: 185 x 155 x 25 mm Finishes: Black Installation: Surface with universal box 60 x 60 LCD 7" screen



NEOS 7" HANDSFREE



Frame HF / NEOS 7 monitor



NEOS 7" / ONEX monitor desk converter

751924

751899 730194

730189 730191  $\circ$ 

NEOS 7" VISUALTECH HANDSFREE MONITOR

CONNECTION BRACKET NEOS NEOS 7 / ONEX MONITOR DESK CONVERTER

BLACK FRAME HF / NEOS 7 NEOS MONITOR 220 X 200 WHITE FRAME HF / NEOS 7 NEOS MONITOR 220 X 200



freedom in your hands



#### Backward compatibility

The new neos 7 "is compatible with all previous digital systems of the AUTA family, regardless of their age, allowing the renovation of the video intercom of a private home independently of the neighborhood.




#### Continuous updates

Free and unlimited access to monitor software upgrades, with regular system updates and the latest firmware versions always available to users.







#### Measures in mm.

#### Our shops

Scan the QR codes and download the AUTA ONEX APP on your device.



ONEX 7" HANDSFREE Wi-Fi







Frame HF / NEOS 7 monitor



NEOS 7" / ONEX monitor desk converter

751944

751899 730194

730189 730191

 $\bigcirc$ 

ONEX 7" Wi-Fi VISUALTECH HANDSFREE MONITOR

CONNECTION BRACKET NEOS NEOS 7 / ONEX MONITOR DESK CONVERTER

BLANCK FRAME MONITOR NEOS HF / NEOS 7 220 X 200 WHITE FRAME MONITOR NEOS HF / NEOS 7 220 X 200



#### **HANDSETS**

Dimensions: 90 x 155 x 36 (base + handset) 90 x 116 x 23 (only base) Finishes: White & Black Installation: Surface with universal box 60x60



HANDSET White



HANDSET Black

NEOS handset frame

REF. 701813

701823

730184 0 730185

DESCRIPTION

VISUALTECH WHITE NEOS HANDSET VISUALTECH BLACK NEOS HANDSET

WHITE FRAME FOR NEOS HANDSET BLACK FRAME FOR NEOS HANDSET



# slim

#### **MONITORS**

Dimensions: 178 x 146 x 30 (surface) 178 x 146 x 7 (flush) Finishes: White Design: Extra-flat Touch buttons LCD 4,3" screen panoramic



SLIM MONITOR White

REF.

DESCRIPTION

751501  $\circ$  SLIM VISUALTECH MONITOR

750920

SLIM MONITOR PLATE

Surface mounting plate

750921

SLIM MONITOR MOUNTING BOX

Flush mounting box (W 179 x H 152 x D 35 mm.)

750927

 $\circ$ 

SLIM MONITOR FRAME

Flush mounting frame

750923

SLIM MONITOR DESK CONVERTER

750928

SLIM MONITOR NON-CONVENTIONAL FIXING For non conventional fixing; wood, etc.

Includes de frame (black or white color).



SLIM monitor desk converter



# compact

#### **MONITORS**

Finishes: White & Silver Installation: Surface LCD 4,3" panoramic screen



COMPACT MONITOR White

RFF

**DESCRIPTION** 

752305

COLOR VISUALTECH COMPACT MONITOR

Digital technology. Installation in 5 wire COAXLESS. Recommended for replacement of conventional AUDIO 4+N systems.



COMPACT monitor desk converter 750399

730482

VISUALTECH/COAXLESS COMPACT BRACKET

Bracket for VISUALTECH or COAXLESS COMPACT monitors

COMPACT MONITOR DESK CONVERTER

# compact

#### **HANDSETS**

Finishes: White & Silver Installation: Surface



COMPACT HANDSET White

REF.

DESCRIPTIO

701705

**VISUALTECH BASIC COMPACT HANDSET**Digital technology. Installation 3 wires

700205

0

**VISUALTECH COMPACT HANDSET**Digital technology. Installation 3 wires

507030


COMPACT HANDSET DESK CONVERTER



COMPACT handset desk converter



# Central guard porter VISUALTECH

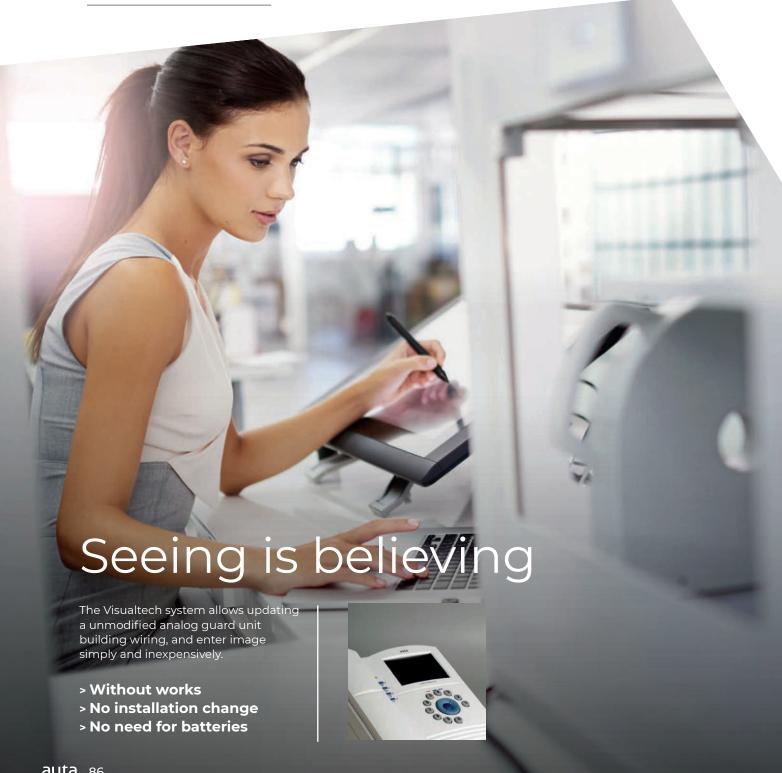





#### **POWER SUPPLY**

REF.

715703

715303 ALV-1,5 A POWER SUPPLY UNIT

DESCRIPTION

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 1.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 30 monitors and 50 telephones or 3 elements with simultaneous call. It can be installed on the surface or by DIN rail (3 elements)

ALV-2,5 A POWER SUPPLY UNIT 715703

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 2.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 50 monitors and 100 telephones or 5 elements with simultaneous call. It can be installed on the surface or by

DIN rail (4 elements)

730145 **BATTERY MANAGER** It allows to connect some batteries to maintain permanent power in the installation, to

the following power supplies: 715303 and 715703.

ATF-12 POWER SUPPLY UNIT 715503 Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS.

It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2 elements)



REF. DESCRIPTION

730146 VISUALTECH DIGITAL LINES SELECTOR SDL

One independent line per SDL

#### **COMMUNICATIONS**

730146

715303

730145

#### **VIDEO**

753098



753098 730140

730142

DESCRIPTION

2 double outputs allowing up to 4 monitors. Measures: 40 x 43 x 22 mm.

SV-U UNIVERSAL VIDEO SELECTOR 730140

Universal video switcher for COAX and COAXLESS installations. 2 inputs / 1 output

COAX TO COAXLESS CONVERTER 730141 Converts COAX video signal to COAXLESS video signal.

COAXLESS MINI VIDEO SPLITTER

COAXLESS TO COAX CONVERTER 730142 Converts COAXLESS video signal to COAX video signal.

730144 COAXLESS VIDEO AMPLIFIER

24 Vdc. Gain between -2dB y 6dB. 1 input and 2 amplified outputs



730144

730141

#### **ACCESSORIES**

auta



730212

730152

REF. DESCRIPTION

730212 24V DC MINI RELAY

24Vdc relay for digital installations. Allows the connection of normally open normally

closed circuits.

730152 DRP-1 VISUALTECH

Interface that allows the connection with other devices without additional cables. Multiple applications: Security (CCTV cameras), home management, building management, etc.

#### **BUZZERS**

RFF

DESCRIPTION

730131

DIGITAL BUZZER

Allows the call extension of the monitor/handset. 2 wires. Compatible with All digital monitors and handsets.

730174

WIRELESS BUZZER HEB KIT

Allows the call extension of the monitor/handset. Wireless. Up to 200m a open field. Emission frequency 868 Mhz that allows good reception. 32 selectable melodies. Up to 30 receivers in the same apartment/house.





730131





# System

Structured cabling. CAT-5/6 cable with RJ-45 connectors.

Universal T-568B connecting protocol that eliminates errors in wiring.

ISO system 100% isolated.

Isolate each flat from the rest of the installation.

## Entry panels

compact

compact ALPHANUMERIC

stainless steel

stainless steel

ALPHANUMERIC











### Monitors & handsets

**Guard Unit** 

#### neos

MONITORES HANDSET









### onex Wi-Fi



### e-compact



### compact

MONITOR HANDSET



AUDIO + VIDEO AUDIO



Available in:



NEOS 7" monitor only is available in black









# compact

Anodized aluminum Quality and resistance Semi-modulars Versatile: audio, audio/video & access control Surface or flush mounted Maximum benefits

# stainless steel

Stainless Steel IP-65 push-buttons Robustness and durability 5 sizes Maximum performance Customizable in size and push-button location

#### SERIES 1/2/3/4/5



### SERIES 1/2/3/4/5



#### **ALPHANUMERIC**

### SERIES 4/5



#### **ALPHANUMERIC**

### SERIES 4/5



Series 5

Series 4







#### MODULES FOR BUILDINGS

DESCRIPTION



509049 COAXLESS AUDIO MODULE

Audio module for COAXLESS and P&P systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels.



COLOR COAXLESS AUDIO/VIDEO MODULE 509058

Audio and video module for COAXLESS and P&P systems. Compatible COMPACT door entry panels.

#### **MODULES FOR STENTRY PANELS**

RFF

509088

DESCRIPTION



COAXLESS AUDIO MODULE FOR S1 PANEL

Audio module for COAXLESS and P&P systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels S1



509077 COAXLESS AUDIO/VIDEO FOR S1 PANEL

Audio and video module for COAXLESS and P&P systems. Compatible COMPACT door entry panels S1. It can be installed on systems with B&W monitors.

#### PANEL AUXILIARY MODULES

REF.

DESCRIPTION



509018 CARDHOLDER MODULE (DC)

Panoramic retro-illuminated card module.

It allows incorporating any type of information deemed necessary into street signs. Compatible with COMPACT entry panels. 24Vdc power supply.



DIGITAL ADAPTED MODULE 509048

Panoramic retro-illuminated card module. Shows system information to people with hearing impairment. Compatible with COMPACT entry panels and DIGITAL systems.



COLOR COAXLESS DECOR VIDEO MODULE 509011

> Color module of coaxless and P&P systems. Compatible with COMPACT y DECOR entry panels. Allows installation with B&W monitors.



#### MODULE OF CONTROL AND ACCESSORIES

REF.

DESCRIPTION



#### 600016 P&P MODULE OF CONTROL

Digital module of control for P&P systems. Not screws required. Connection with RJ-45 connectors. Allows calling code data-base setting. Independent Manager of 2 doors. Door sensor management. Central Guard Porter management. Up to 64500 flats and 254 buildings. Opening auxiliary buttons management. Opening time selection. Build-in access control with 1 accesscode for each flat and 4 access codes. Automatic selection of push-button/keypad+display/mix entry panels. Compatible with COMPACT y DECOR digital entry panels.



#### 600021 DIRECTORY P&P MODULE OF CONTROL

Same benefits as 600016 module of control. Each calling code can have name associated User's research through arrows. ONLY compatible with Directory entry panels.



#### 600002 **CONNECTION MODULE OF ROWS & COLUMNS**

Allows the link of push-button digital entry panels. Lighting Management. Compatible with all digital systems. Up to 3 entry panels with 66 push-buttons.



#### MULTI-MODULE OF CONTROL 600015

Allows the connection of several modules of control wit ONE AUDIO or AUDIO/VIDEO module. Allows more than 3 entry panels and 66 push-buttons. Compatible with All digital systems.



connection

REF. DESCRIPTION

167097 KIT CONNECTION PC USB

USB communications KIT for PC. Allows the calling call data-base management in the module of control. Free Software included. Compatible with Windows XP, 7, 8 y 10.



KEYPAD MINI

PC USB

730165

Portable keyboard that allows the configuration of internal parameters in the module of control. It also allows the management of the user database in those who have this function



## neos

#### **MONITORS**

#### HANDSFREE + HANDSET

Dimensions: 185 x 155 x 24 mm Finishes: White and Black Installation: Surface Screen: LCD 4,3" format 16:9



NEOS HANDSFREE + HANDSET White



NEOS HANDSFREE LIBRES + HANDSET Black

#### **HANDSFREE**

Dimensions: 125 x 155 x 24 mm Finishes: White and Black Installation: Surface Screen: LCD 4,3" format 16:9



NEOS HANDSFREE White



NEOS HANDSFREE Black

#### MONITOR 7"

Dimensions: 183 x 153 x 24 mm Finishes: Black Installation: Surface Screen: LCD 7" format 16:9



NEOS 7" Black



ONEX Wi-Fi Black



Frame HF / NEOS 7 monitor



NEOS HF monitor desk converter



NEOS HANDSET monitor desk converter



NEOS 7" monitor desk converter REF.

730188 • 730189 • 730190 · 730191

DESCRIPTION

COAXLESS WHITE HANDSET NEOS MONITOR
COAXLESS BLACK HANDSET NEOS MONITOR
COAXLESS WHITE HANDSFREE NEOS MONITOR
COAXLESS BLACK HANDSFREE NEOS MONITOR
P&P BLACK HANDSFREE NEOS 7" MONITOR
P&P BLACK HANDSFREE ONEX WI-FI MONITOR

NEOS P&P MONITOR WALL BRACKET
NEOS MONITOR WALL BRACKET
NEOS 7 / ONEX MONITOR DESK CONVERTER
NEOS HF P&P MONITOR DESK CONVERTER
NEOS HANDSET P&P MONITOR DESK CONVERTER

BLACK FRAME NEOS HANDSET MONITOR 220 X 200 BLACK FRAME NEOS HF / NEOS 7 MONITOR 220 X 200 WHITE FRAME NEOS HANDSET MONITOR 220 X 200 WHITE FRAME NEOS HF / NEOS 7 MONITOR 220 X 200

> With HF and HANDSET NEOS monitors the P&P system will be composed by COAXLESS monitors and NEOS P&P connection bracket



# e-compact

#### **MONITORS**

Dimensions: 178 x 142 x 33 (surface) 178 x 142 x 10 (flush) Finishes: White & Black Design: Extra-flat LCD 4,3" panoramic. Format 16:9



E-COMPACT MONITOR White



E-COMPACT MONITOR Black

REF.

DESCRIPTION

751317 751316 E-COMPACT PLUS PLUG & PLAY

Works with CAT 5/6 100% copper cable and RJ-45 connectors according to T568B rule.

751319 751318 MONITOR E-COMPACT PLUS ISO PLUG & PLAY

Works with CAT 5/6 100% copper cable and RJ-45 connectors according to T568B rule.

750920

E-COMPACT SURFACE BRACKET

For ALL E-COMPACT monitors regardless the system

750921

E-COMPACT MOUNTING BOX

Flush mounting box (W 179 x H 152 x D 35 mm

750927 750922 E-COMPACT MONITOR FRAME

Flush mounting frame. Black and White color.

750923

E-COMPACT MONITOR DESK CONVERTER

750928 750924 E-COMPACT NON-CONVENTIONAL FIXING

For non conventional fixing; wood, etc. Includes de frame black or white color.



E-COMPACT monitor desk converter



# compact

#### **MONITORS**

Finishes: White Installation: Surface LCD 4,3" panoramic screen



0

COMPACT MONITOR White

DESCRIPTION

752105

COLOR DIGITAL COMPACT MONITOR Works with CAT 5/6 100% copper cable



COMPACT monitor desk converter

750599

730482

PLUG&PLAY COMPACT MONITOR WALL BRACKET

Works with CAT 5/6 100% copper cable.

COMPACT MONITOR DESK CONVERTER

# compact

#### **HANDSETS**

Finishes: White & Silver Installation: Surface



COMPACT HANDSET White

700005

4 wires. Can be installed with CAT 5/6 cable

DIGITAL BASIC COMPACT HANDSET

700105 0

0

DIGITAL COMPACT HANDSET

4 wires. Can be installed with CAT 5/6 cable

handset desk converter

COMPACT

507030

COMPACT HANDSET DESK CONVERTER



# Central guard porter





#### COMMUNICATION

Panel < > Central

Central < > Flat

Flat < > Central

Panel < > Flat

Central < > Central

Receives all income calls from the entry panel. Can transfer the received call directly. Also can consult the tenant if the call wanted to be attended.

Receives calls from all apartments

Missing calls queue. Shows the last 25 unattended calls received from the apartments.

MUTE option.

Monitoring of all calls.

DO NOT DISTURB mode. If the call from the entry panels is not answered at the Central Guard Porter it will not be transferred to the apartment.

Up to 15 Central Guard Porter can be installed in the same BUS. Intercom between the Central Guard Porters.

**MANAGER mode.** The central guard porter only receives calls from other central guard porter.



CCA guard porter desk converter

Kit connection PC USB



CCI guard porter desk converter RFF

761301 760596 730160

167097 730482 507030 DESCRIPTION

AUDIO CENTRAL GUARD PORTER CCA COAXLESS CENTRAL GUARD PORTER CCI ADAPTOR P&P RJ45 TERMINAL STRIP

PC USB CONNECTION KIT CCI DESK CONVERTER COMPACT CCA DESK CONVERTER





715303

715703





730164

730145





715503

730162

#### **POWER SUPPLY**

REF.

DESCRIPTION

715303

ALV-1,5 A POWER SUPPLY UNIT

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 1.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 30 monitors and 50 telephones or 3 elements with simultaneous call. It can be installed on the surface or by

DIN rail (3 elements)

ALV-2,5 A POWER SUPPLY UNIT 715703

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 2.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 50 monitors and 100 telephones or 5 elements with simultaneous call. It can be installed on the surface or by DIN rail (4 elements)

PLUG & PLAY RJ45 POWER ADAPTOR 730164

Hardwire to PLUG & PLAY adaptor. Used when there is 1 single door entry

730145 **BATTERY MANAGER** 

Allows the connection of back battery with: 715303 y 715703.

715503 ATF-12 POWER SUPPLY UNIT

Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS. It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2

#### COMMUNICATIONS

REF.

DESCRIPTION

730162

PLUG & PLAY DIGITAL LINES SELECTOR SDL

Allows 2 communication channels

For P&P systems

#### **AUDIO & VIDEO**

REF.

DESCRIPTION

730161 PLUG & PLAY VIDEO SELECTOR

Video Selector for P&P systems. Made of high quality ABS plastic.

752998 PLUG & PLAY 8 OUTPUTS HUB

Video distributor with 8 outputs for installations with UTP cable connected following

4 outputs for 4 video door entry panels.. Allows DIN o rack 19"(2 units) montage.

T568B rule.

752998

ISO PLUG & PLAY 4 OUTPUTS HUB 753198

Fully ISOLATED video distributor with 4 outputs for installations with UTP cable connected following T568B rule. The outputs are FULLY isolated offering a FULLY protection to the connected monitors. Can be ONLY used with the Isolated ISO

E-COMPACT monitor.







753198



#### 730160

730150

#### **AUDIO & VIDEO**

REF. DESCRIPTION

730160 PLUG & PLAY RJ45 ADAPTOR

Hardwire to PLUG & PLAY adaptor.

#### **ACCESSORIES**

730182



730157



730212

730174

REF. DESCRIPTION

730150 **DRP-1 DIGITAL** 

Interface that allows the connection with other devices without additional cables. Multiple applications: Security (CCTV cameras), home management, building

730182 **DRP-2 DIGITAL** 

Allows the lift control management through AUTA monitors or handsets.

730157 PLUG & PLAY TESTER KIT

UTP cabling tester KIT. Emitter and Receiver. It works with 9V battery (not included).

730212 24V DC MINI RELAY

4Vdc relay for digital installations.

Allows the connection of normally open normally closed circuits.

#### **BUZZERS**

REF.

DESCRIPTION

730131

DIGITAL BUZZER

Allows the call extension of the monitor/handset. 2 wires. Compatible with All digital monitors and handsets.

730174

WIRELESS BUZZER HEB KIT

Allows the call extension of the monitor/handset. Wireless. Up to 200m a open field. Emission frequency 868 Mhz that allows good reception. 32 selectable melodies. Up to

30 receivers in the same apartment/house.

730131

# COAX **//** COAXLESS

# System

Digital system.

Bus operation that allows installation. Multi-building y Multi-housing.

Flexible system with multiple possibilities.



## Entry panels

compact

compact ALPHANUMERIC

stainless steel

stainless steel

ALPHANUMERIC











### COAX \_ **COAXLESS**

### Monitors & handsets

### **Guard Unit**

#### neos

MONITORS HANDSET







onex Wi-Fi

### e-compact



### compact

MONITOR HANDSET



AUDIO + VIDEO AUDIO



Available in:



NEOS 7" monitor only is available in black



Available in:





# compact

Anodized aluminum
Quality and resistance
Semi-modulars
5 sizes
Versatile: audio, audio/video & access control
Surface or flush mounted
Maximum benefits

#### SERIES 1/2/3/4/5



#### **ALPHANUMERIC**

### SERIES 4/5



# stainless steel

Stainless Steel
IP-65 push-buttons
Robustness and durability
5 sizes
Maximum performance
Customizable in size and push-button location

#### SERIES 1/2/3/4/5



#### **ALPHANUMERIC**

#### SERIES 4/5



Series 4 Series 5





#### MODULES FOR BUILDINGS

DESCRIPTION



509049 COAXLESS AUDIO MODULE

Audio module for COAXLESS and P&P systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels.



MÓDULO DE AUDIO DIGITAL COAX 509050

> Audio module for COAX systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels.



MÓDULO DE AUDIO/VIDEO COLOR DIGITAL COAX 509057

> Audio and video module for COAX systems. Compatible COMPACT door entry panels. It can be installed on systems with B&W monitors.



MÓDULO DE AUDIO/VIDEO COLOR DIGITAL NO-COAX

Audio and video module for COAXLESS and P&P systems. Compatible COMPACT door entry panels. It can be installed on systems with B&W monitors.

#### **MODULES FOR STENTRY PANELS**

REF.

509088

509058

DESCRIPTION



COAXLESS AUDIO MODULE FOR S1 PANEL

Audio module for COAXLESS and P&P systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels  ${\sf S1}$ 



**AUDIO MODULE FOR S1 PANEL** 509079

> Audio module for COAX systems. It incorporates COAX video management that allows future extensions of the system. Compatible with COMPACT door entry panels S1.



COLOR COAXLESS AUDIO/VIDEO MODULE FOR S1 PANEL 509077

Audio and video module for COAXLESS and P&P systems. Compatible COMPACT door entry panels S1. It can be installed on systems with B&W monitors.



509074 COLOR COAX AUDIO/VIDEO MODULE FOR S1 PANEL

Audio and video module for COAX systems. Compatible COMPACT door entry panels S1. It can be installed on systems with B&W monitors.

#### PANEL AUXILIARY MODULES

REF.

509011

REF.

600014

DESCRIPTION



#### 509018 CARDHOLDER MODULE CC

Panoramic retro-illuminated card module.

It allows incorporating any type of information deemed necessary into street signs. Compatible with COMPACT entry panels. 24Vdc power supply.



509048 DIGITAL ADAPTED MODULE

> Panoramic retro-illuminated card module. Shows system information to people with hearing impairment. Compatible with COMPACT entry panels and DIGITAL systems.



509005 COAX DECOR COLOR VIDEO MODULE

Color module of COAX systems. Compatible with COMPACT y DECOR entry panels. Allows installation with B&W monitors.



COAXLESS DECOR COLOR VIDEO MODULE

Color module of COAXLESS and P&P systems. Compatible with COMPACT y DECOR entry panels. Allows installation with B&W monitors.

#### MODULE OF CONTROL AND ACCESSORIES



DESCRIPTION

#### 600013 COMPACT MODULE OF CONTROL

Digital module of control for AUDIO, COAX and COAXLESS systems. . Allows calling code data-base setting. Independent Manager of 2 doors. Door sensor management. Central Guard Porter management. Up to  $64500 \ flats \ and \ 254 \ buildings. Opening \ auxiliary \ buttons \ management. \ Opening \ time \ selection. \ Build-in$ access control with 1 accesscode for each flat and 4 access codes. Automatic selection of push-button/ keypad+display/mix entry panels. Compatible with COMPACT y DECOR digital entry panels.



#### DIRECTORY MODULE OF CONTROL

Same benefits as 600013 module of control. Each calling code can have name associated User's research through arrows. ONLY compatible with Directory entry panels.



#### 600018 ALPHANUMERIC MODULE OF CONTROL

Digital module of control for AUDIO, COAX and COAXLESS systems.

Allows the call pressing floor number and flat's letter. Same benefits as 600013 module of control.



#### **CONNECTION MODULE OF ROWS & COLUMNS** 600002

Allows the link of push-button digital entry panels. Lighting Management. Compatible with all digital systems. Up to 3 entry panels with 66 push-buttons.



#### MULTI-MODULE OF CONTROL 600015

Allows the connection of several modules of control wit ONE AUDIO



connection PC USB

REF.

DESCRIPTION



730165

167097 KIT CONNECTION PC USB

USB communications KIT for PC. Allows the calling call data-base management in the module of control. Free Software included. Compatible with Windows XP, 7, 8 y 10.



KEYPAD MINI

KEYPAD MINI

Portable keyboard that allows the configuration of internal parameters in the module of control. It also allows the management of the user database in those who have this function





**HANDSFREE** 

# The lightest design

LCD 4,3" screen, format 16:9

Touch buttons

Induction loop amplification system (Teleloop)





# neos

#### COAX / COAXLESS

#### HANDSFREE + HANDSET

Dimensions: 185 x 155 x 24 mm Finishes: White & Black Installation: Surface LCD 4,3" format 16:9



**NEOS** HANDSFREE + HANDSET White



**NEOS** HANDSFREE + HANDSET Black

#### **HANDSFREE**

Dimensions: 125 x 155 x 24 mm Finishes: White & Black Installation: Surface LCD 4,3" format 16:9



NFOS **HANDSFREE** White



NFOS HANDSFREE Black

#### MONITOR 7"

Finishes: Negro Installation: Surface Screen: LCD 7" format 16:9



NEOS 7" Black

Dimensions: 183 x 153 x 24 mm



Frame HF / NEOS 7 monitor



**NEOS HF** monitor desk converter



NEOS HANDSET monitor desk converter



NEOS 7" monitor desk converter

REF.

751826 751925 751926

0

751816

730188 730189 730190 0 730191  $\bigcirc$ 

DESCRIPTION

COAX WHITE HANDSET NEOS MONITOR COAX BLACK HANDSET NEOS MONITOR COAXLESS WHITE HANDSET NEOS MONITOR COAXLESS BLACK HANDSET NEOS MONITOR COAX WHITE HANDSFREE NEOS MONITOR COAX BLACK HANDSFREE NEOS MONITOR COAXLESS WHITE HANDSFREE NEOS MONITOR COAXLESS BLACK HANDSFREE NEOS MONITOR **COAX HANDSFREE NEOS 7" MONITOR COAXLESS HANDSFREE NEOS 7" MONITOR** 

NEOS MONITOR WALL BRACKET NEOS HANDSFREE MONITOR DESK CONVERTER NEOS HANDSET MONITOR DESK CONVERTER NEOS 7 / ONEX MONITOR DESK CONVERTER

BLACK FRAME NEOS HANDSET MONITOR 220 X 200 BLACK FRAME NEOS HF / NEOS 7 MONITOR 220 X 200 WHITE FRAME NEOS HANDSET MONITOR 220 X 200 WHITE FRAME NEOS HF / NEOS 7 MONITOR 220 X 200

# neos 7"

freedom in your hands



## Backward compatibility

The new neos 7 "is compatible with all previous digital systems of the AUTA family, regardless of their age, allowing the renovation of the video intercom of a private home independently of the neighborhood.




# Continuous updates

Free and unlimited access to monitor software upgrades, with regular system updates and the latest firmware versions always available to users.







## Measures in mm

# Our shops

Scan the QR codes and download the AUTA ONEX APP on your device.



ONEX 7" HANDSFREE Wi-Fi







Frame HF / NEOS 7 monitor



NEOS 7" / ONEX monitor desk converter REF.

751945 • 751946 •

751899 730194

730189 **•** 730191 •

DESCRIPTION

ONEX 7" Wi-Fi COAX HANDSFREE MONITOR ONEX 7" Wi-Fi COAXLESS HANDSFREE MONITOR

CONNECTION BRACKET NEOS
NEOS 7 / ONEX MONITOR DESK CONVERTER

BLANCK FRAME MONITOR NEOS HF / NEOS 7 220 X 200 WHITE FRAME MONITOR NEOS HF / NEOS 7 220 X 200







HOW TO INSTALL THE NEOS HANDSET?

See video



Handsets

# neos

## **HANDSETS**

Dimensions: 90 x 155 x 36 (base + handset) 90 x 116 x 23 (only base) Finishes: White & Black Installation: Surface with universal box 60x60



NEOS HANDSET White



NEOS HANDSET Black



NEOS handset frame

701812 701822

730184 730185 DESCRIPTION

DIGITAL WHITE NEOS HANDSET DIGITAL BLACK NEOS HANDSET

WHITE FRAME FOR NEOS HANDSET BLACK FRAME FOR NEOS HANDSET

# e-compact

# **MONITORS**

Dimensions: 178 x 142 x 33 (surface) 178 x 142 x 10 (flush) Finishes: White & Black Design: Extra-flat LCD 4,3" panoramic. Format 16:9



E-COMPACT MONITOR White



E-COMPACT MONITOR Black

REF.

DESCRIPTION

751311 751310 E-COMPACT PLUS COAX MONITOR

Digital technology. Installation 4 + RG - 59

751313 751312

 $\circ$ 

E-COMPACT PLUS COAXLESS MONITOR Digital technology. Installation CATS - 5/6.

750920

E-COMPACT SURFACE BRACKET

For ALL E-COMPACT monitors regardless the system

750921

E-COMPACT MOUNTING BOX

Flush mounting box (W 179 x H 152 x D 35 mm

750927 750922 E-COMPACT MONITOR FRAME

Flush mounting frame. Black and White color.

750923

E-COMPACT MONITOR DESK CONVERTER

750928

E-COMPACT NON-CONVENTIONAL FIXING

750924

For non conventional fixing; wood..etc. Includes de frame black or

white color.



E-COMPACT monitor desk converter

# compact

# **MONITORS**

Finishes: White Installation: Surface LCD 4,3" panoramic screen



COMPACT MONITOR White

DESCRIPTION

752105 0 COLOR DIGITAL COMPACT MONITOR

Digital. 4 wires + RG-59 or 6 wires (CAT 5/6 UTP cable).

750299

COAX MONITOR WALL BRACKET

Digital. 4 wires + RG-59

750399

COAXLESS MONITOR WALL BRACKET

6 wires (CAT 5/6 UTP cable).

730482

MONITOR DESK CONVERTER



COMPACT monitor desk converter

COMPACT

handset desk converter

# compact

# **HANDSETS**

Finishes: White & Silver Installation: Surface



COMPACT HANDSET White

REF.

DESCRIPTION

700005  $\bigcirc$  DIGITAL BASIC COMPACT HANDSET 4 wires. Can be installed with CAT 5/6 cable

700105  $\bigcirc$ 

DIGITAL COMPACT HANDSET 4 wires. Can be installed with CAT 5/6 cable

507030

HANDSET DESK CONVERTER

Central guard porter

COAX / COAXLESS



Dimensions: 8,5 x 23 x 5 cm

## Audio/Video

Dimensions: 19,5 x 23 x 5 cm TFT color screen O.S.D. technology Information on screen without video signal

Receives all income calls from the entry panel. Can transfer the received call directly. Also can consult the tenant if the call wanted to be attended.

Receives calls from all apartments.

Missing calls queue. Shows the last 25 unattended calls received from the apartments.

MUTE option.

Monitoring of all calls.

DO NOT DISTURB mode. If the call from the entry panels is not answered at the Central Guard Porter it will not be transferred to the apartment.

Up to 15 Central Guard Porter can be installed in the same BUS. Intercom between the Central Guard Porters.

MANAGER mode. The central guard porter only receives calls from other central guard porter.



4 operating modes: Standard / Direct / Manager / Do not Disturb.



Shows the last 25 nonattended calls from the flats.



Multi-central. Up to 15 Central Guard Porter can be installed in the same BUS.



The Central Guard Porter can be set up as INTERNAL or EXTERNAL.



Kit connection PC USB



CCI guard porter desk converter



CCA guard porter desk converter DESCRIPTION

761301 AUDIO CENTRAL GUARD PORTER CCA
760595 COAX CENTRAL GUARD PORTER CCI
760596 COAXLESS CENTRAL GUARD PORTER CCI

 167097
 KIT CONNECTION PC USB

 730482
 CCI DESK CONVERTER

 507030
 CCA DESK CONVERTER







# **POWER SUPPLY**

REF.

715303 ALV-1,5 A POWER SUPPLY UNIT

DESCRIPTION

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 1.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 30 monitors and 50 telephones or 3 elements with simultaneous call.

It can be installed on the surface or by DIN rail (3 elements).

715703 ALV-2,5 A POWER SUPPLY UNIT

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 2.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 50 monitors and 100 telephones or 5 elements with simultaneous call.

It can be installed on the surface or by DIN rail (4 elements).

730145 **BATTERY MANAGER** 

It allows to connect some batteries to maintain permanent power in the installation, to the following power supplies: 715303 and 715703...

715503 ATF-12 POWER SUPPLY UNIT

DIGITAL LINES SELECTOR (SDL)

Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS. It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2 elements)

715303



715503

715703

# **COMMUNICATIONS**

730137 730149



730154

DESCRIPTION

One independent line per SDL. Suitable for COAX and COAXLESS systems.

730149 INTERIOR DIGITAL LINES SELECTOR SDI One independent line per FLAT. Suitable for COAX and COAXLESS systems

FLOOR DIGITAL LINES SELECTOR SDP 730154 One independent line per FLOOR. Suitable for COAX and COAXLESS systems.

**VIDEO** 

REF.

730137



753098

DESCRIPTION REF.

COAXIAL VIDEO DISTRIBUTOR DV4-CS 4 OUTPUTS 750498 4 outputs allowing up to 4 monitors. For COAX systems.

753098 **COAXLESS MINI DISTRIBUTOR 4 OUTPUTS** 2 double outputs allowing up to 4 monitors. For COAXLESS/VISUALTECH systems.

# **VIDEO**



730141 730140





730142 730143



730144

REF. DESCRIPTION

UNIVERSAL VIDEO SELECTOR SV-U 730140

Universal video switcher for COAX and COAXLESS installations. 2 inputs / 1 output.

**COAX - COAXLESS CONVERTER** 730141

Converts COAX video signal to COAXLESS video signal.

To be installed together with the ref: 730140, Allows the installation of a second camera.

730142 **COAXLESS - COAX CONVERTER** 

Converts COAXLESS video signal to COAX video signal.

730143 **COAX VIDEO AMPLIFIER** 

24 Vdc. Gain between -2dB y 6dB. 1 input and 2 amplified outputs

730144 **COAXLESS VIDEO AMPLIFIER** 

24 Vdc. Gain between -2dB y 6dB. 1 input and 2 amplified outputs.as.

# **ACCESSORIES**





730150

730212

730182

DESCRIPTION

730212 24V MINI RELAY

24Vdc relay for digital installations. Allows the connection of normally open normally

closed circuits.

730150 **DRP-1 DIGITAL** 

Interface that allows the connection with other devices without additional cables. Multiple applications: Security (CCTV cameras), home management, building

management..etc

730182 DRP-2 DIGITAL

Allows the lift control management through AUTA monitors or handsets.

# **BUZZERS**

RFF

DESCRIPTION





730131 730174 730131 DIGITAL BUZZER

Allows the call extension of the monitor/handset. 2 wires. Compatible with all digital monitors and handsets.

730174 WIRELESS BUZZER HEB KIT

Allows the call extension of the monitor/handset. Wireless. Up to 200m a open field. Emission frequency 868 Mhz that allows good reception. 32 selectable melodies. Up to 30 receivers in the same apartment/house.

# INTERCOM

# System

Intercommunication in homes. Up to 15 indoor units in the house.

Inner intercommunication, ideal for offices and commercial premises. Up to 63 indoor units.



# Entry panels

compact

compact ALPHANUMERIC

stainless steel

stainless steel











# **INTERCOM**

# Monitors & handsets

# avant



# Available in:



# compact

MONITOR



# HANDSET



# Guard Unit

AUDIO + VÍDEO









# compact

Anodized aluminum Quality and resistance Semi-modulars Versatile: audio, audio/video & access control Surface or flush mounted Maximum benefits

# SERIES 1/2/3/4/5



# **ALPHANUMERIC**

# SERIES 4/5



Series 4 Series 5

# stainless steel

Stainless Steel IP-65 push-buttons Robustness and durability 5 sizes Maximum performance Customizable in size and push-button location

# SERIES 1/2/3/4/5




# **ALPHANUMERIC**

# SERIES 4/5



Series 5 Series 4





# MODULES FOR BUILDINGS

REF.

DESCRIPTION



#### 509049 COAXLESS AUDIO MODULE

Audio module for COAXLESS systems. It incorporates COAX video management that allows future extensions of the system. Compatible with COMPACT door entry panel



#### AUDIO MODULE 509050

Audio module for COAX systems. It incorporates COAX video management that allows future extensions of the system. Compatible with COMPACT door entry panel



#### COLOR COAX AUDIO/VIDEO MODULE 509057

Audio and video module for COAX systems. Compatible COMPACT door entry panels. It can be installed on systems with B&W monitors.



#### COLOR COAXLESS AUDIO/VIDEO MODULE 509058

Audio and video module for COAXLESS and P&P systems. Compatible COMPACT door entry panels. It can be installed on systems with B&W monitors

# **MODULES FOR STENTRY PANELS**

RFF

509088

DESCRIPTION



# COAXLESS AUDIO MODULE FOR S1 PANEL

Audio module for COAXLESS and P&P systems. It incorporates COAXLESS video management that allows future extensions of the system. Compatible with COMPACT door entry panels S1.



#### 509079 **AUDIO MODULE FOR S1 PANEL**

Audio module for COAX systems. It incorporates COAX video management that allows future extensions of the system. Compatible with COMPACT door entry panels S1.



#### 509077 COLOR COAXLESS AUDIO/VIDEO MODULE FOR S1 PANEL

Audio and video module for COAXLESS and P&P systems. Compatible COMPACT door entry panels S1. It can be installed on systems with B&W monitors.



#### COLOR COAX AUDIO/VIDEO MODULE FOR S1 PANEL 509074

Audio and video module for COAX systems. Compatible COMPACT door entry panels S1. It can be installed on systems with B&W monitors.



## PANEL AUXILIARY MODULES

REF.

DESCRIPTION



#### 509018 CARDHOLDER MODULE (DC)

Panoramic retro-illuminated card module.

It allows incorporating any type of information deemed necessary into street signs. Compatible with

COMPACT entry panels. 24Vdc power supply.



#### DIGITAL ADAPTED MODULE 509048

Panoramic retro-illuminated card module. Shows system information to people with hearing impairment. Compatible with COMPACT entry panels and DIGITAL system.

509005 COLOR COAX DECOR VIDEO MODULE



Color module of COAX systems. Compatible with COMPACT y DECOR entry panels. Allows installation with **B&W** monitors

509011 COLOR COAXLESS DECOR VIDEO MODULE

Color module of COAXLESS and P&P systems. Compatible with COMPACT y DECOR entry panels. Allows installation with B&W monitors.

# MODULE OF CONTROL Y ACCESSORIES

DESCRIPTION REF.

600014

#### 600013 COMPACT MODULE OF CONTROL

Digital module of control for AUDIO, COAX and COAXLESS systems. . Allows calling code data-base setting. Independent Manager of 2 doors. Door sensor management. Central Guard Porter management. Up to 64500 flats and 254 buildings. Opening auxiliary buttons management. Opening time selection. Build-in access control with 1 accesscode for each flat and 4 access codes. Automatic selection of push-button/ keypad+display/mix entry panels. Compatible with COMPACT y DECOR digital entry panels.



# DIRECTORY MODULE OF CONTROL

Same benefits as 600013 module of control. Each calling code can have name associated User's research through arrows. ONLY compatible with Directory entry panels.



#### 600018 ALPHANUMERIC MODULE OF CONTROL

Digital module of control for AUDIO, COAX and COAXLESS systems. Allows the call pressing floor number and flat's letter. Same benefits as 600013 module of control



#### 600002 **CONNECTION MODULE OF ROWS & COLUMNS**

Allows the link of push-button digital entry panels. Lighting Management. Compatible with all digital systems. Up to 3 entry panels with 66 push-buttons.



#### 600015 MULTI-MODULE OF CONTROL

Allows the connection of several modules of control wit ONE AUDIO or AUDIO/VIDEO module. Allows more than 3 entry panels and 66 push-buttons. Compatible with All digital systems.



|   | Ki |
|---|----|
|   | C  |
| 1 | Р  |

onnection C USB

DESCRIPTION RFF

167097

KIT CONNECTION PC USB

USB communications KIT for PC. Allows the calling call data-base management in the module of control. Free Software included. Compatible with Windows XP, 7, 8 y 10.



KEYPAD MINI

730165 KEYPAD MINI

> Portable keyboard that allows the configuration of internal parameters in the module of control. It also allows the management of the user database in those who have this function

# avant

# **MONITORS**

Dimensions: 178 x 142 x 27 (surface) 178 x 142 x 6 (flush) Finishes: White, Black & Steel Design: Extra-flat Touch buttons TFT-LCD 5,6" screen



AVANT MONITOR Black



AVANT MONITOR White



AVANT MONITOR Steel

750941 750942 0 750943 

COAX INTERCOM AVANT MONITOR 4 wires + COAX RG-59 Up to 15 intercom monitors inside the same house/flat.

750944 750945 0 750946

COAXLESS INTERCOM AVANT MONITOR AVANT

6 wires. Can be installed with CAT 5/6 UTP cable. Up to 15 intercom monitors inside the same house/flat.

750920

**AVANT MONITOR PLATE** 

Surface mounting plate

DESCRIPTION

750921

AVANT MONITOR MOUNTING BOX

Flush mounting box (W 179 x H 152 x D 35 mm.)

750922 750927 0 AVANT MONITOR FRAME

Flush mounting frame. Black and White color.

750923

AVANT MONITOR DESK CONVERTER

750924 750928

 $\circ$ 

AVANT / SLIM MONITOR DESK CONVERTER



AVANT monitor desk converter

# compact

## **MONITORS**

Finishes: White Installation: Surface LCD 4,3" panoramic screen



COMPACT MONITOR Intercom



COMPACT MONITOR Intercom (keypad)

DESCRIPTION

754205

COLOR DIGITAL INTERCOM COMPACT MONITOR NO KEYPAD

4 wires + COAX RG-59 or 6 wires (can be installed with CAT 5/6 UTP cable). Internal INTERCOM up to 6 units in the same house or flat.

754305  $\bigcirc$  COLOR DIGITAL INTERCOM COMPACT MONITOR KEYPAD

4 wires + COAX RG-59 or 6 wires (can be installed with CAT 5/6 UTP cable). Internal INTERCOM up to 15 units in the same house or flat.

750299

COAX COMPACT MONITOR WALL BRACKET

4 + COAX RG-59

750399

COAXLESS COMPACT MONITOR WALL BRACKET

6 wires (CAT 5/6 UTP cable.

DESK CONVERTER



COMPACT monitor desk converter

730482

# compact

# **HANDSETS**

Finishes: White Installation: Surface



COMPACT HANDSET Intercom (no keypad)



COMPACT HANDSET Intercom (keypad)

REF.

DESCRIPTION

702105  $\bigcirc$  COMPACT INTERCOM HANDSET NO KEYPAD

4 wires (can be installed with CAT 5/6 UTP cable). Internal INTERCOM up to 6 units in the same house

702205  $\bigcirc$  COMPACT INTERCOM HANDSET KEYPAD

4 wires (can be installed with CAT 5/6 UTP cable). Internal INTERCOM up to 15 units in the same house

507030

HANDSET DESK CONVERTER



COMPACT handset desk converter

Central guard porter

INTERCOM

#### Audio

Dimensions: 8,5 x 23 x 5 cm

## Audio/Video

Dimensions: 19,5 x 23 x 5 cm TFT color screen O.S.D. technology Information on screen without video signal

Receives all income calls from the entry panel. Can transfer the received call directly. Also can consult the tenant if the call wanted to be attended.

Receives calls from all apartments.

Missing calls queue. Shows the last 25 unattended calls received from the apartments.

MUTE option.

Monitoring of all calls.

DO NOT DISTURB mode. If the call from the entry panels is not answered at the Central Guard Porter it will not be transferred to the apartment.

Up to 15 Central Guard Porter can be installed in the same BUS. Intercom between the Central Guard Porters.

MANAGER mode. The central guard porter only receives calls from other central guard porter.



Kit connection PC USB



CCA guard porter converter



CCI guard porter desk converter





4 operating modes: Standard / Direct / Manager / Do not Disturb.



Shows the last 25 nonattended calls from the flats.



Multi-central. Up to 15 Central Guard Porter can be installed in the same BUS.



The Central Guard Porter can be set up as INTERNAL or EXTERNAL.

761301 760595 760596

167097 730482 507030 DESCRIPTION

AUDIO CENTRAL GUARD PORTER CCA COAX CENTRAL GUARD PORTER CCI COAXLESS CENTRAL GUARD PORTER CCI

KIT CONNECTION PC USB CCI DESK CONVERTER CCA DESK CONVERTER



# **POWER SUPPLY**

715703







715503

REF. DESCRIPTION

715303 ALV-1,5 A POWER SUPPLY UNIT

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 1.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 30 monitors and 50 telephones or 3 elements with simultaneous call. It can be installed on the surface or by DIN rail (3 elements).

ALV-2,5 A POWER SUPPLY UNIT 715703

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 2.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 50 monitors and 100 telephones or 5 elements with simultaneous call. It can be installed on the surface or by DIN rail (4 elements).

**BATTERY BACK UP MANAGER** 730145

> It allows to connect some batteries to maintain permanent power in the installation, to the following power supplies: 715303 and 715703...

ATF-12 POWER SUPPLY UNIT 715503

> Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS. It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2 elements)

# COMMUNICATIONS



715303

730145

730149 730137



730154

REF. DESCRIPTION

730149 INTERIOR DIGITAL LINES SELECTOR SDI

One independent line per FLAT. Suitable for COAX and COAXLESS systems.

730137 DIGITAL LINES SELECTOR SDL

One independent line per SDL. Suitable for COAX and COAXLESS systems.

730154 FLOOR DIGITAL LINES SELECTOR SDP

One independent line per FLOOR. Suitable for COAX and COAXLESS systems.

# **VIDEO**





753098

DESCRIPTION REF.

750498 COAX VIDEO DISTRIBUTOR

4 outputs allowing up to 4 monitors. For COAX systems

753098 COAXLESS MINI VIDEO DISTRIBUTOR

2 double outputs allowing up to 4 monitors. For COAXLESS/VISUALTECH systems.  $40\,\mathrm{x}$ 43 x 22 mm.

750498



730140

730141





730142

730143



730144

**ACCESSORIES** 

**VIDEO** 

730140

730141

730142

730143

730144

DESCRIPTION

UNIVERSAL VIDEO SELECTOR SV-U

COAX TO COAXLESS CONVERTER

COAXLESS TO COAX CONVERTER

**COAX VIDEO AMPLIFIER** 

COAXLESS VIDEO AMPLIFIER

Converts COAX video signal to COAXLESS video signal.

Converts COAXLESS video signal to COAX video signal.

24 Vdc. Gain between -2dB y 6dB. 1 input and 2 amplified outputs

24 Vdc. Gain between -2dB y 6dB. 1 input and 2 amplified outputs



730212 730150



730182

RFF DESCRIPTION

24V DC MINI RELAY 730212

24Vdc relay for digital installations. Allows the connection of normally open normally closed circuits.

Universal video switcher for COAX and COAXLESS installations. 2 inputs / 1 output.

730150 DRP-1 DIGITAL

> Interface that allows the connection with other devices without additional cables. Multiple applications: Security (CCTV cameras), home management, building management..etc For COAX and COAXLESS systems.

730182 DRP-2 DIGITAL

Allows the lift control management through AUTA monitors or handsets.

## **BUZZERS**

REF.

DESCRIPTION

DIGITAL BUZZER

730131

Allows the call extension of the monitor/handset. 2 wires. Compatible with all digital monitors and handsets.

730174

WIRELESS BUZZER HEB KIT

Allows the call extension of the monitor/handset. Wireless. Up to 200m a open field. Emission frequency 868 Mhz that allows good reception. 32 selectable melodies. Up to 30 receivers in the same apartment/house.





730131

730174





Handset desk converter COMPACT

507030

HANDSET DESK CONVERTER

REF

DESCRIPTION



## 715303

## ALV-1,5 A POWER SUPPLY UNIT

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 1.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 30 monitors and 50 telephones or 3 elements with simultaneous call. It can be installed on the surface or by DIN rail (3 elements).



# 715703

# ALV-2,5 A POWER SUPPLY UNIT

Switched power supply. Input 100-260 Vac 50-60 Hz. Output 24Vdc 2.5A.Made of high quality ABS. In digital systems Auta allows you to install up to 50 monitors and 100 telephones or 5 elements with simultaneous call.





# ΛΝΛLOG

# System

Conventional analog audio system.

Elements compatible with other manufacturers of conventional analog systems.

# Entry panels

compact

stainless steel







# ΛΝΛLOG

# Renovation monitors

# decor MONITOR



# Handsets

neos HANDSET



Available in:



# compact

HANDSET



# compact

Anodized aluminum
Quality and resistance
Semi-modulars
5 sizes
Versatile: audio, audio/video & access control
Surface or flush mounted
Maximum benefits


# SERIES 1/2/3/4/5



# stainless steel

Stainless Steel
IP-65 push-buttons
Robustness and durability
5 sizes
Maximum performance
Customizable in size and push-button location

# SERIES 1/2/3/4/5







# **MODULES FOR BUILDINGS**

REF.

DESCRIPTION



509051 ANALOG AUDIO MODULE

Analog audio module for conventional 4+N systems. Compatible with COMPACT analog entry panels.



509046 UNIVERSAL ANALOG AUDIO MODULE

Analog audio module for conventional 4+N systems. Compatible with other analog audio systems. Compatible also with COMPACT analog entry panels.

# PANEL AUXILIARY MODULES

REF.

509030

DESCRIPTION



CARDHOLDER MODULE

Panoramic retro-illuminated card module.

Allows incorporating any type of information deemed necessary into street signs Compatible with COMPACT entry panels. 24Vdc power supply.





# neos

# **HANDSETS**

Dimensions: 90 x 155 x 36 (base + handset) 90 x 116 x 23 (only base) Finishes: White & Black Installation: Surface with universal box 60x60



NEOS HANDSET White

DESCRIPTION



NEOS HANDSET Black



**NEOS** handset frame

REF.

730184  $\bigcirc$ 730185

WHITE ANALOG NEOS HANDSET **BLACK ANALOG NEOS HANDSET** WHITE COMPATIBLE NEOS HANDSET BLACK COMPATIBLE NEOS HANDSET

WHITE FRAME FOR NEOS HANDSET BLACK FRAME FOR NEOS HANDSET

# compact

# **HANDSETS**

Finishes: White & Silver Installation: Surface



COMPACT HANDSET White

REF.

DESCRIPTION

700305 0

ANALOG COMPACT HANDSET For conventional 4+N systems.

700505

COMPATIBLE ANALOG COMPACT HANDSET

For conventional 4+N systems. Compatible with other conventional audio systems.



Handset desk converter COMPACT

507030

HANDSET DESK CONVERTER

# decor

# **MONITORS**

Finishes: Blanco Installation: Surface



DECOR MONITOR analog

REF.

DESCRIPTION

751305

## COLOR COMPACT AC-900N ANALOG MONITOR

For AUTA analog audio/video systems. Compatible in installations with the following Analog monitors: AV-79N, AV-793, AV-870. Connection bracket included.

751098

## COLOR ANALOG DECOR MONITOR

For AUTA analog audio/video systems. Compatible in installations with the following Analog monitors: AV-96 (750196), B&W DECOR (750698). Connection bracket included.



ANALOG Accessories

# **POWER SUPPLY**

REF.

715503 719902



715503 ATF-12 POWER SUPPLY UNIT

DESCRIPTION

Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS. It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2  $\,$ 

KIT POWER SUPPLY FOR AUDIO SYSTEMS 719902

Compatible con power supplies: ATF-80, ATF-91, ATF-92.

KIT POWER SUPPLY FOR VIDEO SYSTEMS 719903 Compatible con power supplies: ALK-79, ALV-79, ALK-95, ALV-95, ALK-96, ALV-96.

## **COMMUNICATIONS**





730181 730180

DESCRIPTION REF.

730181 KIT CA-2 MINI + ATF-12

To switch audio between panels. One feeds 2 panels. Includes ATF-12 POWER SUPPLY.

730180 CA-2 MIN

To switch audio between panels. One feeds 2 panels.

# **ACCESSORIES**

REF.

730211





730211

DESCRIPTION

For analog systems with Electronic call. Allows the connection of normally open normally

closed circuits.

MINI AUXILIARY RELAY

12V MINI AUXILIARY RELAY 730213

12V universal relay. Allows the connection of normally open normally closed circuits.

# **BUZZERS**

730174



730174

Only for buzzer call systems.

DESCRIPTION WIRELESS BUZZER HEB KIT

> Allows the call extension of the monitor/handset. Wireless. Up to 200m a open field. Emission frequency 868 Mhz that allows good reception. 32 selectable melodies. Up to

30 receivers in the same apartment/house.

# auta Bringing people together



# LITS VIDEO AUDIO





# Kits of 1 & 2 ways

# compact

entry panel

## **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX

SERIES 2 215 x 130 mm 203 x 130 x 60 mm

QUANTITY DESCRIPTION RFF



#### KIT KVD-1 COMPACT 746011 1

| 651211 | 1 | COMPACT ENTRY PANEL T S2 101    |
|--------|---|---------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2            |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE      |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL       |
| 755005 | 1 | 2 WIRES COMPACT MONITOR         |
| 750699 | 1 | 2 WIRES COMPACT MONITOR BRACKET |
| 730168 | 1 | 2 WIRES POWER INJECTOR          |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY   |
|        |   |                                 |





# 746151 1 KIT KVD-1 SLIM

| 651211 | 1 | COMPACT ENTRY PANEL T S2 101  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 751502 | 1 | 2 WIRES SLIM MONITOR          |
| 750920 | 1 | SLIM MONITOR SURFACE BRACKET  |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |

QUANTITY DESCRIPTION RFF



#### KIT KVD-2 COMPACT 746012 2

| ••••••••••••••••••••••••••••••••••••••• |                                 |
|---|---------------------------------|
| 651212 1                                | COMPACT ENTRY PANEL T S2 102    |
| 509022 1                                | MOUNTING BOX SERIES2            |
| 508001 1                                | 2 WIRES AUDIO/VIDEO MODULE      |
| 600019 1                                | 2 WIRES MODULE OF CONTROL       |
| 755005 2                                | 2 WIRES COMPACT MONITOR         |
| 750699 2                                | 2 WIRES COMPACT MONITOR BRACKET |
| 753298 1                                | 2 WIRES DISTRIBUTOR             |
| 730168 1                                | 2 WIRES POWER INJECTOR          |
| 715303 1                                | ALV-1'5A / 24VDC POWER SUPPLY   |
|   |                                 |







#### 746152 2 KIT KVD-2 SLIM

| 651212 | 1 | COMPACT ENTRY PANEL T S2 102  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 751502 | 2 | 2 WIRES SLIM MONITOR          |
| 750920 | 2 | SLIM MONITOR SURFACE BRACKET  |
| 753298 | 1 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# Kits of 1 & 2 ways

# stainless steel

entry panel

## **ENTRY PANEL DIMENSIONS**

 SERIES
 ENTRY PANEL
 MOUNTING BOX

 SERIES 2
 215 x 130 mm
 203 x 130 x 60 mm

REF. QUANTITY DESCRIPTION



| 746031 | 1 | KIT KVD-1 STAINLESS STEEL COMPACT             |
|--------|---|---|
| 697211 | 1 | STAINLESS STEEL 2 WIRES ENTRY PANEL FV S2 101 |
| 509022 | 1 | MOUNTING BOX SERIES2                          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL                     |
| 755005 | 1 | 2 WIRES COMPACT MONITOR                       |
| 750699 | 1 | 2 WIRES COMPACT MONITOR BRACKET               |
| 730168 | 1 | 2 WIRES POWER INJECTOR                        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY                 |





REF. QUANTITY DESCRIPTION



| 746032 | 2 | KIT KVD-2 STAINLESS STEEL COMPACT             |
|--------|---|---|
| 697212 | 1 | STAINLESS STEEL 2 WIRES ENTRY PANEL FV S2 102 |
| 509022 | 1 | MOUNTING BOX SERIES2                          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL                     |
| 755005 | 2 | 2 WIRES COMPACT MONITOR                       |
| 750699 | 2 | 2 WIRES COMPACT MONITOR BRACKET               |
| 753298 | 1 | 2 WIRES DISTRIBUTOR                           |
| 730168 | 1 | 2 WIRES POWER INJECTOR                        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY                 |
|        |   |   |







| 746172 | 2 | KIT KVD-2 STAINLESS STEEL SLIM                |
|--------|---|---|
| 697212 | 1 | STAINLESS STEEL 2 WIRES ENTRY PANEL FV S2 102 |
| 509022 | 1 | MOUNTING BOX SERIES2                          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL                     |
| 751502 | 2 | 2 WIRES SLIM MONITOR                          |
| 750920 | 2 | SLIM MONITOR SURFACE BRACKET                  |
| 753298 | 1 | 2 WIRES DISTRIBUTOR                           |
| 730168 | 1 | 2 WIRES POWER INJECTOR                        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY                 |
|        |   |   |



# compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full COMPACT entry panel including the A/V module.
- · Mounting box.
- Module of control.
- Power supply + power injector.
- · 1 video distributor for each 4 monitors.



## **AVAILABLE MONITORS**

SLIM



COMPACT



## **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |
|          |              |                   |

REF. QUANTITY DESCRIPTION

741053 3 KIT VIDEO 3 WAY COMPACT PUSH-BUTTON 2 WIRES

1 COMPACT ENTRY PANEL T S2 103 651213 1 MOUNTING BOX SERIES 2 509022 1 2 WIRES MODULE OF CONTROL 600019 508001 2 WIRES AUDIO/VIDEO MODULE 753298 1 2 WIRES DISTRIBUTOR 730168 2 WIRES POWER INJECTOR 1 ALV-1'5A / 24VDC POWER SUPPLY 715303



REF. QUANTITY DESCRIPTION

#### 6 KIT VIDEO 6 WAY COMPACT PUSH-BUTTON 2 WIRES 741056

651223 COMPACT ENTRY PANEL T S2 203 MOUNTING BOX SERIES 2 509022 600019 2 WIRES MODULE OF CONTROL 508001 2 WIRES AUDIO/VIDEO MODULE 753298 2 WIRES DISTRIBUTOR 730168 2 WIRES POWER INJECTOR ALV-1'5A / 24VDC POWER SUPPLY 715303



# 741054 4 KIT VIDEO 4 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 1 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# 741058 8 KIT VIDEO 8 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651224<br>509022 | 1<br>1 | COMPACT ENTRY PANEL T S2 204 MOUNTING BOX SERIES 2 |
|------------------|--------|--|
| 600019           | 1      | 2 WIRES MODULE OF CONTROL                          |
| 508001           | 1      | 2 WIRES AUDIO/VIDEO MODULE                         |
| 753298           | 2      | 2 WIRES DISTRIBUTOR                                |
| 730168           | 1      | 2 WIRES POWER INJECTOR                             |
| 715303           | 1      | ALV-1'5A / 24VDC POWER SUPPLY                      |





REF. QUANTITY DESCRIPTION

## 741060 10 KIT VIDEO 10 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651325 | 1 | COMPACT ENTRY PANEL T S3 205  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 3 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# 741070 20 KIT VIDEO 20 WAY COMPACT PUSH-BUTTON 2 WIRES

REF. QUANTITY DESCRIPTION

| 651540 | 1 | COMPACT ENTRY PANEL T S5 210  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 5 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



## 741062 12 KIT VIDEO 12 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651326 | 1 | COMPACT ENTRY PANEL T S3 206  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 3 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



## 741072 22 KIT VIDEO 22 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651541 | 1 | COMPACT ENTRY PANEL T S5 211  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 6 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



## 741064 14 KIT VIDEO 14 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651427 | 1 | COMPACT ENTRY PANEL T S4 207  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 4 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# 741082 32 KIT VIDEO 32 WAY COMPACT KEYPAD 2 WIRES

| 652402 | 1 | COMPACT ENTRY PANEL T/T S4 KEY |
|--------|---|--------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL      |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE     |
| 509018 | 1 | DC CARDHOLDER                  |
| 753298 | 8 | 2 WIRES DISTRIBUTOR            |
| 730171 | 1 | ROUTER 2 WIRES                 |
| 730168 | 3 | 2 WIRES POWER INJECTOR         |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |



# 741066 $\,$ 16 $\,$ KIT VIDEO 16 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651428 | 1 | COMPACT ENTRY PANEL T S4 208  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 4 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# 741090 40 KIT VIDEO 40 WAY COMPACT KEYPAD 2 WIRES

| 652402 | 1  | COMPACT ENTRY PANEL T/T S4 KEYPA |
|--------|----|----------------------------------|
| 509024 | 1  | MOUNTING BOX SERIES 4            |
| 600019 | 1  | 2 WIRES MODULE OF CONTROL        |
| 508001 | 1  | 2 WIRES AUDIO/VIDEO MODULE       |
| 509018 | 1  | DC CARDHOLDER                    |
| 753298 | 10 | 2 WIRES DISTRIBUTOR              |
| 730171 | 1  | ROUTER 2 WIRES                   |
| 730168 | 3  | 2 WIRES POWER INJECTOR           |
| 715703 | 2  | ALV-1'5A / 24VDC POWER SUPPLY    |
|        |    |                                  |



# 741068 18 KIT VIDEO 18 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651429 | 1 | COMPACT ENTRY PANEL T S4 209  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508001 | 1 | 2 WIRES AUDIO/VIDEO MODULE    |
| 753298 | 5 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |





# stainless steel

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- Full STAINLESS STEEL entry panel including the A/V module.
- · Mounting box.
- · Module of control.
- Power supply + power injector.
- · 1 video distributor for each 4 monitors.



## **AVAILABLE MONITORS**

SLIM







## **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |

REF. QUANTITY DESCRIPTION

741453 3 KIT VIDEO 3 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

697213 1 STAINLESS STEEL ENTRY PANEL FV S2 103
509022 1 MOUNTING BOX SERIES 2
600019 1 2 WIRES MODULE OF CONTROL
753298 1 2 WIRES DISTRIBUTOR
730168 1 2 WIRES POWER INJECTOR
715303 1 ALV-1'5A / 24VDC POWER SUPPLY



REF. QUANTITY DESCRIPTION

# 741456 6 KIT VIDEO 6 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697223
 1
 STAINLESS STEEL ENTRY PANEL FV S2 203

 509022
 1
 MOUNTING BOX SERIES 2

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 2
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY



# 741454 4 KIT VIDEO 4 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697222
 1
 STAINLESS STEEL ENTRY PANEL FV S2 202

 509022
 1
 MOUNTING BOX SERIES 2

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 1
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY



# 741458 8 KIT VIDEO 8 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697324
 1
 STAINLESS STEEL ENTRY PANEL FV S3 204

 509023
 1
 MOUNTING BOX SERIES 3

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 2
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY





REF. QUANTITY DESCRIPTION

#### 741460 10 KIT VIDEO 10 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

697325 1 STAINLESS STEEL ENTRY PANEL FV S3 205
509023 1 MOUNTING BOX SERIES 3
600019 1 2 WIRES MODULE OF CONTROL
753298 3 2 WIRES DATRIBUTOR
730168 1 2 WIRES POWER INJECTOR
715303 1 ALV-1'5A/ 24VDC POWER SUPPLY



#### 741470 20 KIT VIDEO 20 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697530
 1
 STAINLESS STEEL ENTRY PANEL FV S5 210

 509025
 1
 MOUNTING BOX SERIES 5

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 5
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715703
 1
 ALV-1'5A / 24VDC POWER SUPPLY

REF. QUANTITY DESCRIPTION



## 741462 12 KIT VIDEO 12 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697426
 1
 STAINLESS STEEL ENTRY PANEL FV S4 206

 599024
 1
 MOUNTING BOX SERIES 4

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 3
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY



#### 741472 22 KIT VIDEO 22 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697531
 1
 STAINLESS STEEL ENTRY PANEL FV S5 211

 509025
 1
 MOUNTING BOX SERIES 5

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 6
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715703
 1
 ALV-1'5A / 24VDC POWER SUPPLY



#### 741464 14 KIT VIDEO 14 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697427
 1
 STAINLESS STEEL ENTRY PANEL FV S4 207

 509024
 1
 MOUNTING BOX SERIES 4

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 4
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY



## 741482 32 KIT VIDEO 32 WAY STAINLESS STEEL KEYPAD 2 WIRES

 698401
 1
 STAINLESS STEEL FV/T S4 KEYPAD

 509024
 1
 MOUNTING BOX SERIES 4

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 8
 2 WIRES DISTRIBUTOR

 730171
 1
 ROUTER 2 WIRES

 730168
 3
 2 WIRES POWER INJECTOR

 715703
 1
 ALV-1'5A / 24VDC POWER SUPPLY



## 741466 16 KIT VIDEO 16 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

 697428
 1
 STAINLESS STEEL ENTRY PANEL FV S4 208

 509025
 1
 MOUNTING BOX SERIES 4

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 4
 2 WIRES DISTRIBUTOR

 730168
 1
 2 WIRES POWER INJECTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY



# 741490 40 KIT VIDEO 40 WAY STAINLESS STEEL KEYPAD 2 WIRES

 698401
 1
 STAINLESS STEEL FV/T S4 KEYPAD

 509024
 1
 MOUNTING BOX SERIES 4

 600019
 1
 2 WIRES MODULE OF CONTROL

 753298
 10
 2 WIRES DISTRIBUTOR

 730171
 1
 ROUTER 2 WIRES

 730168
 3
 2 WIRES POWER INJECTOR

 715703
 2
 ALV-1'5A / 24VDC POWER SUPPLY



# 741468 18 KIT VIDEO 18 WAY STAINLESS STEEL PUSH-BUTTON 2 WIRES

697529 1 STAINLESS STEEL ENTRY PANEL FV S5 209
509025 1 MOUNTING BOX SERIES 5
600019 1 2 WIRES MODULE OF CONTROL
753298 5 2 WIRES DISTRIBUTOR
730168 1 2 WIRES POWER INJECTOR
715703 1 ALV-1'5A / 24VDC POWER SUPPLY





# Kits of 1 & 2 ways

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 2 215 x 130 mm 203 x 130 x 60 mm

QUANTITY DESCRIPTION PVP (€)



#### KIT KFD-1 COMPACT PUSH-BUTTON 749871

| 651211 | 1 | COMPACT ENTRY PANEL T S2 101  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2         |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 705005 | 1 | COMPACT HANDSET 2 WIRES       |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



#### KIT KFD-2 COMPACT PUSH-BUTTON 749872

| 651212 | 1 | COMPACT ENTRY PANEL T S2 102  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2         |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 705005 | 2 | COMPACT HANDSET 2 WIRES       |
| 753298 | 1 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |

# Kits for buildings

# compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (handsets).

- · Full COMPACT entry panel including the A/V module.
- · Mounting box.
- · Module of control.
- · Power supply + power injector.
- · 1 distributor for each 4 handsets.



# ENTRY PANEL DIMENSIONS

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |



## 741253 3 KIT AUDIO 3 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651213 | 1 | COMPACT ENTRY PANEL T S2 103  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 1 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# 741254 4 KIT AUDIO 4 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 1 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# 741256 6 KIT AUDIO 6 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651223 | 1 | COMPACT ENTRY PANEL T S2 203  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 2 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |





REF. QUANTITY DESCRIPTION

### 741258 8 KIT AUDIO 8 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651224 | 1 | COMPACT ENTRY PANEL T S2 204  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 2 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741268 18 KIT AUDIO 18 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651429 | 1 | COMPACT ENTRY PANEL T S4 209  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 5 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |

REF. QUANTITY DESCRIPTION



### 741260 10 KIT AUDIO 10 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651325 | 1 | COMPACT ENTRY PANEL T S3 205  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 3 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741270 20 KIT AUDIO 20 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651540 | 1 | COMPACT ENTRY PANEL T S5 210  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 5 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741262 12 KIT AUDIO 12 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651326 | 1 | COMPACT ENTRY PANEL T S3 206  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 3 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741272 22 KIT AUDIO 22 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651541 | 1 | COMPACT ENTRY PANEL T S5 211  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 6 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741264 14 KIT AUDIO 14 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651427 | 1 | COMPACT ENTRY PANEL T S4 207  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 4 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741266 16 KIT AUDIO 16 WAY COMPACT PUSH-BUTTON 2 WIRES

| 651428 | 1 | COMPACT ENTRY PANEL T S4 208  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL     |
| 508004 | 1 | AUDIO MODULE 2 WIRES          |
| 753298 | 4 | 2 WIRES DISTRIBUTOR           |
| 730168 | 1 | 2 WIRES POWER INJECTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741282 KIT AUDIO 32 WAY COMPACT KEYPAD 2 WIRES

| 652402 | 1 | COMPACT ENTRY PANEL T/T S4 KEYPAD |  |
|--------|---|-----------------------------------|--|
| 509024 | 1 | MOUNTING BOX SERIES 4             |  |
| 600019 | 1 | 2 WIRES MODULE OF CONTROL         |  |
| 508004 | 1 | AUDIO MODULE 2 WIRES              |  |
| 509018 | 1 | DC CARDHOLDER                     |  |
| 753298 | 8 | 2 WIRES DISTRIBUTOR               |  |
| 730171 | 1 | ROUTER 2H                         |  |
| 730168 | 3 | 2 WIRES POWER INJECTOR            |  |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |  |
|        |   |                                   |  |



# VISUAL TECH VIDEO

### Kits of 1 & 2 ways

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm

RFF QUANTITY DESCRIPTION



### 745101 745141 1 KIT KVD-1 NEOS MONITOR HANDSET

COMPACT ENTRY PANEL FV S1 101 651151 509021 MOUNTING BOX SERIES 1 509075 AUDIO/VIDEO COLOR VISUALTECH MODULE S1 MONITOR NEOS HANDSET VISUALTECH 751810 751820 751899 NEOS MONITOR WALL BRACKET 715303 ALV-1'5A / 24VDC POWER SUPPLY



### 745121 745161 1 KIT KVD-1 NEOS MONITOR HANDSFREE

651151 COMPACT ENTRY PANEL FV S1 101 509021 MOUNTING BOX SERIES 1 AUDIO/VIDEO COLOR VISUALTECH MODULF S1 509075 1 MONITOR NEOS HANDSFREE VISUALTECH 751814 751824 NEOS MONITOR WALL BRACKET 751899 ALV-1'5A / 24VDC POWER SUPPLY 715303





The NEOS monitor HANDSET and HANDSFREE is also available in black color. See reference

RFF QUANTITY DESCRIPTION







### 745102 745142 2 KIT KVD-2 NEOS MONITOR HANDSET

COMPACT ENTRY PANEL FV S1 201 651161 509021 MOUNTING BOX SERIES 1 509075 AUDIO/VIDEO COLOR VISUALTECH MODULE S1 COAXLESS VIDEO DISTRIBUTOR 753098 751810 751820 MONITOR NEOS HANDSET VISUALTECH 751899 NEOS MONITOR WALL BRACKET 715303 ALV-1'5A / 24VDC POWER SUPPLY



0





### 745122 745162 2 KIT KVD-2 NEOS MONITOR HANDSFREE

| 651161        | 1 | COMPACT ENTRY PANEL FV S1 201          |
|---------------|---|--|
| 509021        | 1 | MOUNTING BOX SERIES 1                  |
| 509075        | 1 | AUDIO/VIDEO COLOR VISUALTECH MODULE S1 |
| 753098        | 1 | COAXLESS VIDEO DISTRIBUTOR             |
| 751814 751824 | 2 | MONITOR NEOS HANDSFREE VISUALTECH      |
| 751899        | 2 | NEOS MONITOR WALL BRACKET              |
| 715303        | 1 | ALV-1'5A / 24VDC POWER SUPPLY          |
|               |   |  |

# stainless steel

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 145 x 130 mm 132 x 122 x 60 mm

RFF QUANTITY DESCRIPTION RFF QUANTITY DESCRIPTION



# 745181 745183 1 KIT STAINLESS STEEL KVD-1 NEOS MONITOR HANDSET

| 797111        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|---------------|---|---------------------------------------|
| 509021        | 1 | MOUNTING BOX SERIES 1                 |
| 751810 751820 | 1 | MONITOR NEOS HANDSET VISUALTECH       |
| 751899        | 1 | NEOS MONITOR WALL BRACKET             |
| 715303        | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |



### 745182 745184 1 KIT STAINLESS STEEL KVD-1 NEOS MONITOR HANDSFREE

| 707444 |        | _ |                                       |
|--------|--------|---|---------------------------------------|
| 797111 |        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
| 509021 |        | 1 | MOUNTING BOX SERIES 1                 |
| 751814 | 751824 | 1 | MONITOR NEOS HANDSFREE VISUALTECH     |
| 751899 |        | 1 | NEOS MONITOR WALL BRACKET             |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |        |   |                                       |





### 745185 745187 2 KIT STAINLESS STEEL KVD-2 **NEOS MONITOR HANDSET**

| 797121 |        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201 |
|--------|--------|---|---------------------------------------|
| 509021 |        | 1 | MOUNTING BOX SERIES 1                 |
| 751810 | 751820 | 2 | MONITOR NEOS HANDSET VISUALTECH       |
| 751899 |        | 2 | NEOS MONITOR WALL BRACKET             |
| 753098 |        | 1 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |        |   |                                       |







| 745186 | 745188 | 2 | KIT STAINLESS STEEL KVD-2<br>NEOS MONITOR HANDSFREE |
|--------|--------|---|---|
| 797121 |        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201               |
| 509021 |        | 1 | MOUNTING BOX SERIES 1                               |
| 751814 | 751824 | 2 | MONITOR NEOS HANDSFREE VISUALTECH                   |
| 751899 |        | 2 | NEOS MONITOR WALL BRACKET                           |
| 753098 |        | 1 | COAXLESS VIDEO DISTRIBUTOR                          |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY                       |

# VISUAL KIT VIDEO

### Kits of 1 & 2 ways

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

 SERIES
 ENTRY PANEL
 MOUNTING BOX

 SERIES 1
 145 x 130 mm
 132 x 122 x 60 mm

REF. QUANTITY DESCRIPTION



# 746821 1 KIT KVD-1 COMPACT 651151 1 COMPACT ENTRY PANEL FV S1 101 509021 1 MOUNTING BOX SERIES 1 509075 1 AUDIO/VIDEO COLOR VISUALTECH MODULE S1 752305 1 COMPACT MONITOR 750399 1 COMPACT WALL BRACKET 715303 1 ALV-1'5A / 24VDC POWER SUPPLY



| 746111 | 1 | KIT KVD-1 SLIM                         |
|--------|---|--|
| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101          |
| 509021 | 1 | MOUNTING BOX SERIES 1                  |
| 509075 | 1 | AUDIO/VIDEO COLOR VISUALTECH MODULE S1 |
| 751501 | 1 | SLIM MONITOR                           |
| 750920 | 1 | SLIM WALL BRACKET                      |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY          |

REF. QUANTITY DESCRIPTION





| 745191 | 1 | KIT KVD-1 NEOS 7                          |
|--------|---|---|
| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101             |
| 509021 | 1 | MOUNTING BOX SERIES 1                     |
| 509075 | 1 | AUDIO/VIDEO COLOR VISUALTECH MODULE S1    |
| 751924 | 1 | NEOS 7 HANDSFREE BLACK MONITOR VISUALTECH |
| 751899 | 1 | NEOS WALL BRACKET                         |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY             |
|        |   |   |







| 7454   | 91 1 | KIT KVD-1 ONEX WI-FI                          |
|--------|------|---|
| 65115  | 1 1  | COMPACT ENTRY PANEL FV S1 101                 |
| 50902  | 1 1  | MOUNTING BOX SERIES 1                         |
| 509075 | 5 1  | AUDIO/VIDEO COLOR VISUALTECH MODULE S1        |
| 75194  | 4 1  | ONEX WI-FI HANDSFREE BLACK MONITOR VISUALTECH |
| 751899 | 9 1  | NEOS WALL BRACKET                             |
| 715303 | 3 1  | ALV-1'5A / 24VDC POWER SUPPLY                 |
|        |      |   |



# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 132 x 122 x 60 mm 145 x 130 mm

RFF QUANTITY DESCRIPTION



KIT KVD-2 COMPACT 746822 2 651161 COMPACT ENTRY PANEL FV S1 201 509021 MOUNTING BOX SERIES 1 509075 AUDIO/VIDEO COLOR VISUALTECH MODULE S1 752305 COMPACT MONITOR COMPACT WALL BRACKET 750399 COAXLESS VIDEO DISTRIBUTOR 753098 715303 ALV-1'5A / 24VDC POWER SUPPLY







#### KIT KVD-2 SLIM 746112 2

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201          |  |
|--------|---|--|--|
| 509021 | 1 | MOUNTING BOX SERIES 1                  |  |
| 509075 | 1 | AUDIO/VIDEO COLOR VISUALTECH MODULE S1 |  |
| 751501 | 2 | SLIM MONITOR                           |  |
| 750920 | 2 | SLIM WALL BRACKET                      |  |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR             |  |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY          |  |
|        |   |  |  |

RFF QUANTITY DESCRIPTION



#### 745192 2 KIT KVD-2 NEOS 7

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201             |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                     |
| 509075 | 1 | AUDIO/VIDEO COLOR VISUALTECH MODULE S1    |
| 751924 | 2 | NEOS 7 HANDSFREE BLACK MONITOR VISUALTECH |
| 751899 | 2 | NEOS WALL BRACKET                         |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR                |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY             |
|        |   |   |

# VISUAL KIT VIDEO

### Kits of 1 & 2 ways

# stainless steel

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm

RFF QUANTITY DESCRIPTION



#### KIT KVD-1 STAINLESS STEEL COMPACT 746606

| 797111 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|----------|---------------------------------------|
| 509021 1 | MOUNTING BOX SERIES 1                 |
| 752305 1 | VISUALTECH COMPACT MONITOR            |
| 750399 1 | COMPACT MONITOR WALL BRACKET          |
| 715303 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|          |                                       |

745193 1

QUANTITY DESCRIPTION

RFF

| 797111 1 STAINLESS STEEL ENTRY PANEL FV S1 101 509021 1 MOUNTING BOX SERIES 1 |   |        |   |   |
|---|---|--------|---|---|
| 509021 1 MOUNTING BOX SERIES 1  | 7 | 97111  | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101     |
|   | 5 | 509021 | 1 | MOUNTING BOX SERIES 1                     |
| 751924 1 NEOS 7 HANDSFREE BLACK MONITOR VISUALTECH                            | 7 | 51924  | 1 | NEOS 7 HANDSFREE BLACK MONITOR VISUALTECH |
| 751899 1 NEOS MONITOR WALL BRACKET  | 7 | 751899 | 1 | NEOS MONITOR WALL BRACKET                 |
| 715303 1 ALV-1'5A / 24VDC POWER SUPPLY  | 7 | 15303  | 1 | ALV-1'5A / 24VDC POWER SUPPLY             |

KIT KVD-1 INOX NEOS 7





#### 746131 1 KIT KVD-1 STAINLESS STEEL SLIM

| 797111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 751501 | 1 | VISUALTECH SLIM MONITOR               |
| 750920 | 1 | SLIM MONITOR WALL BRACKET             |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |







| 745494 | 1 | KIT KVD-1 INOX ONEX Wi-F |
|--------|---|--------------------------|

| 797111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101         |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                         |
| 751944 | 1 | ONEX Wi-Fi HANDSFREE BLACK MONITOR VISUALTECH |
| 751899 | 1 | NEOS MONITOR WALL BRACKET                     |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY                 |
|        |   |   |



# stainless steel

### entry panel

### **ENTRY PANEL DIMENSIONS**

 SERIES
 ENTRY PANEL
 MOUNTING BOX

 SERIES 1
 145 x 130 mm
 132 x 122 x 60 mm

REF. QUANTITY DESCRIPTION



 746607
 2
 KIT KVD-2 STAINLESS STEEL COMPACT

 797121
 1
 STAINLESS STEEL ENTRY PANEL FV S1 201


 509021
 1
 MOUNTING BOX SERIES 1

 752305
 2
 VISUALTECH COMPACT MONITOR

 750399
 2
 COMPACT MONITOR WALL BRACKET

 753098
 1
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'SA / 24VDC POWER SUPPLY



RFF

QUANTITY DESCRIPTION

 797121
 1
 STAINLESS STEEL ENTRY PANEL FV S1 201

 509021
 1
 MOUNTING BOX SERIES 1

 751924
 2
 MONITOR NEOS 7 MANOS LIBRES NEGRO VISUALTECH

 751899
 2
 NEOS 7 HANDSFREE BLACK MONITOR VISUALTECH

 753098
 1
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY







### 746132 2 KIT KVD-2 STAINLESS STEEL SLIM

| 797121 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 751501 | 2 | VISUALTECH SLIM MONITOR               |
| 750920 | 2 | SLIM MONITOR WALL BRACKET             |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |

# VISUAL KIT VIDEO

### Kits for buildings

# compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full COMPACT entry panel including the A/V module.
- · Mounting box.
- · Module of control.
- Power supply
- 1 video distributor for each 4 monitors.

### **MONITORS DO NOT INCLUDED** IN THE KIT

### **AVAILABLE MONITORS**







NEOS 7"



ONEX Wi-Fi



SLIM



COMPACT



### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |

REF. QUANTITY DESCRIPTION

REF. QUANTITY DESCRIPTION

### 741003 3 KIT VIDEO VISUALTECH 3 WAY COMPACT PUSH-BUTTON

| 651213 | 1 | COMPACT ENTRY PANEL T S2 103  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



| <br>  |  |
|-------|--|
| <br>_ |  |

| 651223 | 1 | COMPACT ENTRY PANEL T S2 203  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 2 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741004 4 KIT VIDEO VISUALTECH 4 WAY COMPACT PUSH-BUTTON

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741008 8 KIT VIDEO VISUALTECH 8 WAY COMPACT PUSH-BUTTON

741006 6 KIT VIDEO VISUALTECH 6 WAY COMPACT PUSH-BUTTON

| 651224 | 1 | COMPACT ENTRY PANEL T S2 204  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 2 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



REF. QUANTITY DESCRIPTION

### 741010 10 KIT VIDEO VISUALTECH 10 WAY COMPACT PUSH-BUTTON

| 051325  | - 1 | CUMPACT ENTRY PANEL 1 53 205    |
|---------|-----|---------------------------------|
| 509023  | 1   | MOUNTING BOX SERIES 3           |
| 600011  | 1   | MODULE OF CONTROL VISUALTECH    |
| 509066  | 1   | AUDIO/VIDEO VISUALTECH MODULE   |
| 753098  | 3   | COAXLESS VIDEO DISTRIBUTOR      |
| 71 5000 | -1  | ALV 1'EA / QAVIDO DOWED CLIDDLY |



### 741020 20 KIT VIDEO VISUALTECH 20 WAY COMPACT PUSH-BUTTON

| 651540 | 1 | COMPACT ENTRY PANEL T S5 210  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 5 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |

REF. QUANTITY DESCRIPTION



### 741012 12 KIT VIDEO VISUALTECH 12 WAY COMPACT PUSH-BUTTON

| 651326 | 1 | COMPACT ENTRY PANEL T S3 206  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 3 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741022 22 KIT VIDEO VISUALTECH 22 WAY COMPACT PUSH-BUTTON

| 651541 | 1 | COMPACT ENTRY PANEL T S5 211  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 6 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741014 14 KIT VIDEO VISUALTECH 14 WAY COMPACT PUSH-BUTTON

| 651427 | 1 | COMPACT ENTRY PANEL T S4 207  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 4 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741032 32 KIT VIDEO VISUALTECH 32 WAY COMPACT KEYPAD

| 652402 | 1 | COMPACT ENTRY PANEL T/T S4 KEYPAD |
|--------|---|-----------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4             |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH      |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE     |
| 509018 | 1 | DC CARDHOLDER                     |
| 753098 | 8 | COAXLESS VIDEO DISTRIBUTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |   |                                   |



### 741016 16 KIT VIDEO VISUALTECH 16 WAY COMPACT PUSH-BUTTON

| 651428 | 1 | COMPACT ENTRY PANEL T S4 208  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 4 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741040 40 KIT VIDEO VISUALTECH 40 WAY COMPACT KEYPAD

| 652402 | 1  | COMPACT ENTRY PANEL T/T S4 KEYPAD |
|--------|----|-----------------------------------|
| 509024 | 1  | MOUNTING BOX SERIES 4             |
| 600011 | 1  | MODULE OF CONTROL VISUALTECH      |
| 509066 | 1  | AUDIO/VIDEO VISUALTECH MODULE     |
| 509018 | 1  | DC CARDHOLDER                     |
| 753098 | 10 | COAXLESS VIDEO DISTRIBUTOR        |
| 715703 | 1  | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |    |                                   |



### 741018 18 KIT VIDEO VISUALTECH 18 WAY COMPACT PUSH-BUTTON

| 651429 | 1 | COMPACT ENTRY PANEL T S4 209  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509066 | 1 | AUDIO/VIDEO VISUALTECH MODULE |
| 753098 | 5 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# VISUAL TECH VIDEO

### Kits for buildings

# stainless steel

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full STAINLESS STEEL entry panel including the A/V module.
- Mounting box.
- · Module of control.
- Power supply.
- 1 video distributor for each 4 monitors.



### **AVAILABLE MONITORS**







NEOS HANDSFREE ○ ●

NEOS 7"



ONFX Wi-Fi



SLIM



COMPACT



### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |
|          |              |                   |

REF. QUANTITY DESCRIPTION

REE QUANTITY DESCRIPTION

6

741406

### 741403 3 KIT VIDEO 3 WAY STAINLESS STEEL PUSH-BUTTON

797213 1 STAINLESS STEEL ENTRY PANEL FV S2 103 509022 1 MOUNTING BOX SERIES2 600011 1 MODULE OF CONTROL VISUALTECH 753098 COAXLESS VIDEO DISTRIBUTOR 715303 1 ALV-1'5A / 24VDC POWER SUPPLY



797223 STAINLESS STEEL ENTRY PANEL FV S2 203 MOUNTING BOX SERIES2 509022 600011 MODULE OF CONTROL VISUALTECH 753098 COAXLESS VIDEO DISTRIBUTOR 715303 ALV-1'5A / 24VDC POWER SUPPLY



### 741404 4 KIT VIDEO 4 WAY STAINLESS STEEL PUSH-BUTTON

797222 STAINLESS STEEL ENTRY PANEL FV S2 202 509022 MOUNTING BOX SERIES2 MODULE OF CONTROL VISUALTECH 600011 COAXLESS VIDEO DISTRIBUTOR 753098 1 ALV-1'5A / 24VDC POWER SUPPLY 715303



#### 741408 KIT VIDEO 8 WAY STAINLESS STEEL PUSH-BUTTON

KIT VIDEO 6 WAY STAINLESS STEEL PUSH-BUTTON

797324 STAINLESS STEEL ENTRY PANEL FV S3 204 509023 MOUNTING BOX SERIES 3 MODULE OF CONTROL VISUALTECH 600011 753098 COAXLESS VIDEO DISTRIBUTOR ALV-1'5A / 24VDC POWER SUPPLY



REF. QUANTITY DESCRIPTION

### 741410 10 KIT VIDEO 10 WAY STAINLESS STEEL PUSH-BUTTON

 797325
 1
 STAINLESS STEEL ENTRY PANEL FV S3 205

 509023
 1
 MOUNTING BOX SERIES 3

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 3
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'SA / 24VDC POWER SUPPLY



### 741420 20 KIT VIDEO 20 WAY STAINLESS STEEL PUSH-BUTTON

REF. QUANTITY DESCRIPTION

 797530
 1
 STAINLESS STEEL ENTRY PANEL FV S5 210

 509025
 1
 MOUNTING BOX SERIES 5

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 5
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'5A/24VDC POWER SUPPLY



### 741412 12 KIT VIDEO 12 WAY STAINLESS STEEL PUSH-BUTTON

 797426
 1
 STAINLESS STEEL ENTRY PANEL FV S4 206

 509024
 1
 MOUNTING BOX SERIES 4

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 3
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'SA / 24VDC POWER SUPPLY



### 741422 22 KIT VIDEO 22 WAY STAINLESS STEEL PUSH-BUTTON

 797531
 1
 STAINLESS STEEL ENTRY PANEL FV S5 211

 509025
 1
 MOUNTING BOX SERIES 5

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 6
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'SA / 24VDC POWER SUPPLY



### 741414 14 KIT VIDEO 14 WAY STAINLESS STEEL PUSH-BUTTON

 797427
 1
 STAINLESS STEEL ENTRY PANEL FV S4 207

 509024
 1
 MOUNTING BOX SERIES 4

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 4
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'5A / 24VDC POWER SUPPLY



### 741432 32 KIT VIDEO 32 WAY STAINLESS STEEL KEYPAD

 798401
 1
 STAINLESS STEEL ENTRY PANEL FV/T S4 KEYPAD

 509024
 1
 MOUNTING BOX SERIES 4

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 8
 COAXLESS VIDEO DISTRIBUTOR

 715703
 1
 ALV-1'5A / 24VDC POWER SUPPLY



### 741416 16 KIT VIDEO 16 WAY STAINLESS STEEL PUSH-BUTTON

 797428
 1
 STAINLESS STEEL ENTRY PANEL FV S4 208

 509024
 1
 MOUNTING BOX SERIES 4

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 4
 COAXLESS VIDEO DISTRIBUTOR

 715303
 1
 ALV-1'SA / 24VDC POWER SUPPLY



### 741440 40 KKIT VIDEO 40 WAY STAINLESS STEEL KEYPAD

 798401
 1
 STAINLESS STEEL ENTRY PANEL FV/T S4 KEYPAD

 509024
 1
 MOUNTING BOX SERIES 4

 600011
 1
 MODULE OF CONTROL VISUALTECH

 753098
 10
 COAXLESS VIDEO DISTRIBUTOR

 715703
 1
 ALV-1'5A / 24VDC POWER SUPPLY



### 741418 18 KIT VIDEO 18 WAY STAINLESS STEEL PUSH-BUTTON

797529 1 STAINLESS STEEL ENTRY PANEL FV S5 209
509025 1 MOUNTING BOX SERIES 5
600011 1 MODULE OF CONTROL VISUALTECH

753098 5 COAXLESS VIDEO DISTRIBUTOR
715303 1 ALV-1'5A / 24VDC POWER SUPPLY



# VISUAL KIT AUDIO

### Kits of 1 & 2 ways

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

ENTRY PANEL SERIES MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm



The NEOS handset is also available in black color. See reference

RFF QUANTITY

DESCRIPTION



RFF

QUANTITY

DESCRIPTION













| 651131 |        | 1 |
|--------|--------|---|
| 509021 |        | 1 |
| 509080 |        | 1 |
| 701813 | 701823 | 1 |
| 715303 |        | 1 |
|        |        |   |

### KIT KFD-1 NEOS

COMPACT ENTRY PANEL F S1 101 MOUNTING BOX SERIES 1 AUDIO MODULE VISUALTECH KIT S1 NEOS VISUALTECH HANDSET ALV-1'5A / 24VDC POWER SUPPLY





### 744102 744142 2

| 651141 |        |
|--------|--------|
| 509021 |        |
| 509080 |        |
| 701813 | 701823 |
| 715303 |        |
|        |        |

### KIT KFD-2 NEOS

COMPACT ENTRY PANEL F S1 201 MOUNTING BOX SERIES 1 AUDIO MODULE VISUALTECH KIT S1 NEOS VISUALTECH HANDSET ALV-1'5A / 24VDC POWER SUPPLY



# compact entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm

QUANTITY DESCRIPTION REF.





| 49851 | 1 | KIT KFD-1 | COMPACT |
|-------|---|-----------|---------|


| 651131 | 1 | COMPACT ENTRY PANEL F S1 101  |
|--------|---|-------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1         |
| 509080 | 1 | AUDIO MODULE VISUALTECH KIT S |
| 701705 | 1 | COMPACT VISUALTECH HANDSET    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |

QUANTITY DESCRIPTION RFF





| 651141 | 1 | COMPACT ENTRY PANEL F S1 201   |
|--------|---|--------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1          |
| 509080 | 1 | AUDIO MODULE VISUALTECH KIT S1 |
| 701705 | 2 | COMPACT VISUALTECH HANDSET     |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |

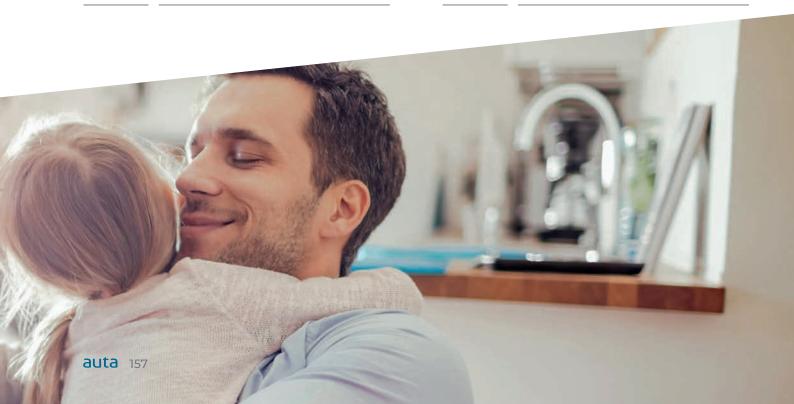

# VISUAL TECH AUDIO

### Kits for buildings

# compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (handsets).

- Full COMPACT entry panel including the A/V module.
- Mounting box.
- · Module of control.
- · Power supply.

## **HANDSET** DO NOT INCLUDED

### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |



### **AVAILABLE HANDSETS**

NEOS COMPACT



REF. QUANTITY DESCRIPTION

### 3 KIT AUDIO VISUALTECH 3 WAY COMPACT PUSH-BUTTON

651213 COMPACT ENTRY PANEL T S2 103 509022 MOUNTING BOX SERIES2 MODULE OF CONTROL VISUALTECH 600011 509052 AUDIO/VIDEO MODULE VISUALTECH ALV-1'5A / 24VDC POWER SUPPLY



### 741204 4 KIT AUDIO VISUALTECH 4 WAY COMPACT PUSH-BUTTON

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741206 6 KIT AUDIO VISUALTECH 6 WAY COMPACT PUSH-BUTTON

| 651223<br>509022<br>600011<br>509052 | 1<br>1<br>1<br>1 | COMPACT ENTRY PANEL T S2 203 MOUNTING BOX SERIES2 MODULE OF CONTROL VISUALTECH AUDIO/VIDEO MODULE VISUALTECH AUM 15A (20/DC DOWED SUPPLY |
|--------------------------------------|------------------|--|
| 715303                               | 1                | ALV-1'5A / 24VDC POWER SUPPLY  |
| 715303                               | 1                | ALV-1'5A / 24VDC POWER SUPPLY  |



REF. QUANTITY DESCRIPTION

### 741208 8 KIT AUDIO VISUALTECH 8 WAY COMPACT PUSH-BUTTON

| 651224 | 1 | COMPACT ENTRY PANEL 1 S2 204  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



REF. QUANTITY DESCRIPTION

| 651429 | 1 | COMPACT ENTRY PANEL T S4 209  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741210 10 KIT AUDIO VISUALTECH 10 WAY COMPACT PUSH-BUTTON

| 651325 | 1 | COMPACT ENTRY PANEL T S3 205  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741220 20 KIT AUDIO VISUALTECH 20 WAY COMPACT PUSH-BUTTON

741218 18 KIT AUDIO VISUALTECH 18 WAY COMPACT PUSH-BUTTON

| 651540 | 1 | COMPACT ENTRY PANEL T S5 210  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741212 12 KIT AUDIO VISUALTECH 12 WAY COMPACT PUSH-BUTTON

| 651326 | 1 | COMPACT ENTRY PANEL T S3 206  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741222 22 KIT AUDIO VISUALTECH 22 WAY COMPACT PUSH-BUTTON

| 651541<br>509025 | 1<br>1 | COMPACT ENTRY PANEL T S5 211 MOUNTING BOX SERIES 5 |
|------------------|--------|--|
| 600011           | 1      | MODULE OF CONTROL VISUALTECH                       |
| 509052           | 1      | AUDIO/VIDEO MODULE VISUALTECH                      |
| 715303           | 1      | ALV-1'5A / 24VDC POWER SUPPLY                      |



### 741214 14 KIT AUDIO VISUALTECH 14 WAY COMPACT PUSH-BUTTON

| 651427 | 1 | COMPACT ENTRY PANEL T S4 207  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



#### 741232 KIT AUDIO VISUALTECH COMPACT KEYPAD

|  | 652402 | 1 | COMPACT ENTRY PANEL T/T S4 KEYPAD |
|--|--------|---|-----------------------------------|
|  | 509024 | 1 | MOUNTING BOX SERIES 4             |
|  | 600011 | 1 | MODULE OF CONTROL VISUALTECH      |
|  | 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH     |
|  | 509018 | 1 | DC CARDHOLDER                     |
|  | 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |
|  |        |   |                                   |
|  |        |   |                                   |



### 741216 16 KIT AUDIO VISUALTECH 16 WAY COMPACT PUSH-BUTTON

| 651428 | 1 | COMPACT ENTRY PANEL T S4 208  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600011 | 1 | MODULE OF CONTROL VISUALTECH  |
| 509052 | 1 | AUDIO/VIDEO MODULE VISUALTECH |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



# VIDEO

### Kits of 1 & 2 ways



# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

ENTRY PANEL SERIES MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm

RFF QUANTITY DESCRIPTION RFF QUANTITY DESCRIPTION



### 745201 755241 1 KIT KVD-1 NEOS HANDSET MONITOR

|  | 651151 |        | 1 | COMPACT ENTRY PANEL FV S1 101 |
|--|--------|--------|---|-------------------------------|
|  | 509021 |        | 1 | MOUNTING BOX SERIES 1         |
|  | 509074 |        | 1 | AAUDIO/VIDEO COAX MODULE S1   |
|  | 751811 | 751821 | 1 | NEOS HANDSET MONITOR COAX     |
|  | 751899 |        | 1 | NEOS MONITOR WALL BRACKET     |
|  | 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|  |        |        |   |                               |



### 745221 745261 1 KIT KVD-1 NEOS HANDSFREE MONITOR

| 651151 |        | 1 | COMPACT ENTRY PANEL FV S1 101 |
|--------|--------|---|-------------------------------|
| 509021 |        | 1 | MOUNTING BOX SERIES 1         |
| 509074 |        | 1 | AAUDIO/VIDEO COAX MODULE S1   |
| 751815 | 751825 | 1 | NEOS HANDSFREE MONITOR COAX   |
| 751899 |        | 1 | NEOS MONITOR WALL BRACKET     |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |        |   |                               |



The NEOS monitor HANDSET and HANDSFREE is also available in black color. See reference



### 

| 651161        | 1 | COMPACT ENTRY PANEL FV S1 201 |
|---------------|---|-------------------------------|
| 509021        | 1 | MOUNTING BOX SERIES 1         |
| 509074        | 1 | AAUDIO/VIDEO COAX MODULE S1   |
| 750498        | 1 | COAX VIDEO DISTRIBUTOR        |
| 751811 751821 | 2 | NEOS HANDSET MONITOR COAX     |
| 751899        | 2 | NEOS MONITOR WALL BRACKET     |
| 715303        | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|               |   |                               |







### 745222 745262 2 KIT KVD-2 NEOS HANDSFREE MONITOR

| ······ |        |        |   |                               |
|--------|--------|--------|---|-------------------------------|
|        | 651161 |        | 1 | COMPACT ENTRY PANEL FV S1 201 |
|        | 509021 |        | 1 | MOUNTING BOX SERIES 1         |
|        | 509074 |        | 1 | AAUDIO/VIDEO COAX MODULE S1   |
|        | 750498 |        | 1 | COAX VIDEO DISTRIBUTOR        |
|        | 751815 | 751825 | 2 | NEOS HANDSFREE MONITOR COAX   |
|        | 751899 |        | 2 | NEOS MONITOR WALL BRACKET     |
|        | 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |        |        |   |                               |





The NEOS monitor HANDSET and HANDSFREE is also available in black color.

See reference

# stainless steel

entry panel

RFF

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 132 x 122 x 60 mm 145 x 130 mm

QUANTITY DESCRIPTION RFF QUANTITY DESCRIPTION



### 745281 745283 1 KIT KVD-1 STAINLESS STEEL NEOS HANDSET MONITOR

|  | 777111 |        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|--|--------|--------|---|---------------------------------------|
|  | 509021 |        | 1 | MOUNTING BOX SERIES 1                 |
|  | 751811 | 751821 | 1 | NEOS HANDSET MONITOR COAX             |
|  | 751899 |        | 1 | NEOS MONITOR WALL BRACKET             |
|  | 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|  |        |        |   |                                       |







# 745285 745287 2 KIT KVD-2 STAINLESS STEEL NEOS HANDSET MONITOR

| 777121 |        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201 |
|--------|--------|---|---------------------------------------|
| 509021 |        | 1 | MOUNTING BOX SERIES 1                 |
| 751811 | 751821 | 2 | NEOS HANDSET MONITOR COAX             |
| 751899 |        | 2 | NEOS MONITOR WALL BRACKET             |
| 750498 |        | 1 | COAX VIDEO DISTRIBUTOR                |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |        |   |                                       |





| 745286 | 745288 | 2 | KIT KVD-2 STAINLESS STEEL<br>NEOS HANDSFREE MONITOR |
|--------|--------|---|---|
| 777121 |        | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201               |
| 509021 |        | 1 | MOUNTING BOX SERIES 1                               |
| 751815 | 751825 | 2 | NEOS HANDSFREE MONITOR COAX                         |
| 751899 |        | 2 | NEOS MONITOR WALL BRACKET                           |
| 750498 |        | 1 | COAX VIDEO DISTRIBUTOR                              |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY                       |





# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 145 x 130 mm 132 x 122 x 60 mm

QUANTITY DESCRIPTION RFF





#### KIT KVD-1 COMPACT 746721

|  | 651151 | 1 | COMPACT ENTRY PANEL FV S1 101     |  |  |
|--|--------|---|-----------------------------------|--|--|
|  | 509021 | 1 | MOUNTING BOX SERIES 1             |  |  |
|  | 509074 | 1 | AUDIO/VIDEO COAX MODULE S1        |  |  |
|  | 752105 | 1 | COMPACT COAX MONITOR              |  |  |
|  | 750299 | 1 | COMPACT COAX MONITOR WALL BRACKET |  |  |
|  | 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |  |  |
|  |        |   |                                   |  |  |




RFF

QUANTITY DESCRIPTION



#### KIT KVD-1 NEOS 7 745291 1

| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101      |
|--------|---|------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1              |
| 509074 | 1 | AUDIO/VIDEO COAX MODULE S1         |
| 751925 | 1 | NEOS 7 HANDSFREE BLACK MONITOR COA |
| 751899 | 1 | NEOS MONITOR WALL BRACKET          |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY      |
|        |   |                                    |





### 747701 1 KIT KVD-1 E-COMPACT WHITE

| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101  |
|--------|---|--------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1          |
| 509074 | 1 | AAUDIO/VIDEO COAX MODULE S1    |
| 751311 | 1 | E-COMPACT MONITOR              |
| 750920 | 1 | E-COMPACT MONITOR WALL BRACKET |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |
|        |   |                                |







#### KIT KVD-1 ONEX WI-FI 745492 1

| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101           |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                   |
| 509074 | 1 | AUDIO/VIDEO COAX MODULE S1              |
| 751945 | 1 | ONEX WI-FI HANDSFREE BLACK MONITOR COAX |
| 751899 | 1 | NEOS MONITOR WALL BRACKET               |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY           |
|        |   |   |





# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 145 x 130 mm 132 x 122 x 60 mm

QUANTITY DESCRIPTION RFF



QUANTITY DESCRIPTION RFF




#### 746722 2 KIT KVD-2 COMPACT

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201     |
|--------|---|-----------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1             |
| 509074 | 1 | AAUDIO/VIDEO COAX MODULE S1       |
| 752105 | 2 | COMPACT COAX MONITOR              |
| 750299 | 2 | COMPACT COAX MONITOR WALL BRACKET |
| 750498 | 1 | COAX VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |   |                                   |

#### 745292 2 KIT KVD-2 NEOS 7

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201       |
|--------|---|-------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1               |
| 509074 | 1 | AUDIO/VIDEO COAX MODULE S1          |
| 751925 | 2 | NEOS 7 HANDSFREE BLACK MONITOR COAX |
| 751899 | 2 | NEOS MONITOR WALL BRACKET           |
| 753098 | 1 | COAX VIDEO DISTRIBUTOR              |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY       |
|        |   |                                     |







#### 747702 2 KIT KVD-2 E-COMPACT WHITE

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201  |
|--------|---|--------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1          |
| 509074 | 1 | AAUDIO/VIDEO COAX MODULE S1    |
| 751311 | 2 | E-COMPACT MONITOR              |
| 750920 | 2 | E-COMPACT MONITOR WALL BRACKET |
| 750498 | 1 | COAX VIDEO DISTRIBUTOR         |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |
|        |   |                                |





# stainless steel

entry panel

### ENTRY PANEL DIMENSIONS

SERIES ENTRY PANEL MOUNTING BOX

**SERIES 1** 145 x 130 mm 132 x 122 x 60 mm

REF. QUANTITY DESCRIPTION



### KIT KVD-1 STAINLESS STEEL COMPACT

| 777111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 752105 | 1 | COLOR DIGITAL COMPACT MONITOR         |
| 750299 | 1 | COMPACT COAX MONITOR WALL BRACKET     |
| 715303 | 1 | ATV-1'5A / 24VDC DOWED STIDDLY        |

REF. QUANTITY DESCRIPTION





### 745293 1 KIT KVD-1 INOX NEOS 7

| 777111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 751925 | 1 | NEOS 7 HANDSFREE BLACK MONITOR COAX   |
| 751899 | 1 | NEOS MONITOR WALL BRACKET             |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |



746564



### 747715 1 KIT KVD-1 STAINLESS STEEL E-COMPACT WHITE

| 74//13 | 1 | KIT KVD-1 STAINLESS STEEL E-COMPACT WITTE |
|--------|---|---|
|        |   |   |
| 777111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101     |
| 509021 | 1 | MOUNTING BOX SERIES 1                     |
| 751311 | 1 | E-COMPACT MONITOR                         |
| 750920 | 1 | E-COMPACT MONITOR WALL BRACKET            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY             |
|        |   |   |







### 745495 1 KIT KVD-1 INOX ONEX WI-FI

| 777111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101   |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                   |
| 751945 | 1 | ONEX WI-FI HANDSFREE BLACK MONITOR COAX |
| 751899 | 1 | NEOS MONITOR WALL BRACKET               |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY           |
|        |   |   |





# stainless steel

entry panel

### **ENTRY PANEL DIMENSIONS**

 SERIES
 ENTRY PANEL
 MOUNTING BOX

 SERIES 1
 145 x 130 mm
 132 x 122 x 60 mm

REF. QUANTITY DESCRIPTION PVP  $(\mathfrak{E})$  REF. QUANTITY DESCRIPTION





# 746603 2 KIT KVD-2 STAINLESS STEEL COMPACT 777121 1 STAINLESS STEEL ENTRY PANEL FV S1 201 509021 1 MOUNTING BOX SERIES 1 752105 2 COLOR DIGITAL COMPACT MONITOR 750299 2 COMPACT COAX MONITOR WALL BRACKET 750498 1 COAX VIDEO DISTRIBUTOR 715303 1 ALV-1'5A / 24VDC POWER SUPPLY









| 747768 2 |  | KIT KVD-2 STAINLESS STEEL E-COMPACT WHITE |
|----------|--|---|
|----------|--|---|

| 777121 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 751311 | 2 | E-COMPACT MONITOR                     |
| 750920 | 2 | E-COMPACT MONITOR WALL BRACKET        |
| 750498 | 1 | COAX VIDEO DISTRIBUTOR                |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |



# compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full COMPACT entry panel including the A/V module.
- · Mounting box.
- · Module of control.
- · Power supply.
- 1 video distributor for each 4 monitors.

### **MONITORS DO NOT INCLUDED** IN THE KIT

### **AVAILABLE MONITORS**

NEOS HANDSET ○ ●





NEOS HANDSFREE ○ ●

NEOS 7"



ONEX Wi-Fi



E-COMPACT



COMPACT



### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |
|          |              |                   |

REF. QUANTITY DESCRIPTION

REF. QUANTITY DESCRIPTION

### 741153 3 KIT VIDEO 3 WAY COMPACT COAX PUSH-BUTTON

| 651213 | 1 | COMPACT ENTRY PANEL T S2 103  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 1 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



# 741156 6 KIT VIDEO 6 WAY COMPACT COAX PUSH-BUTTON

| 651223 | 1 | COMPACT ENTRY PANEL T S2 203  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 2 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741154 4 KIT VIDEO 4 WAY COMPACT COAX PUSH-BUTTON

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 1 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741158 8 KIT VIDEO 8 WAY COMPACT COAX PUSH-BUTTON

| 651224 | 1 | COMPACT ENTRY PANEL T S2 204  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 2 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |







REF. QUANTITY DESCRIPTION

### 741160 10 KIT VIDEO 10 WAY COMPACT COAX PUSH-BUTTON

| 651325 | 1 | COMPACT ENTRY PANEL T S3 205  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 3 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



REF. QUANTITY DESCRIPTION

|  | 651540 | 1 | COMPACT ENTRY PANEL T S5 210   |
|--|--------|---|--------------------------------|
|  | 509025 | 1 | MOUNTING BOX SERIES 5          |
|  | 600013 | 1 | MODULE OF CONTROL COMPACT      |
|  | 509057 | 1 | AUDIO/VIDEO MODULE COAX        |
|  | 750498 | 5 | COAX VIDEO DISTRIBUTOR         |
|  | 715303 | 1 | ALV-1'54 / 24VDC POWER SLIPPLY |



### 741162 12 KIT VIDEO 12 WAY COMPACT COAX PUSH-BUTTON

| 651326 | 1 | COMPACT ENTRY PANEL T S3 206  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 3 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741172 22 KIT VIDEO 22 WAY COMPACT COAX PUSH-BUTTON

741170 20 KIT VIDEO 20 WAY COMPACT COAX PUSH-BUTTON

| 651541 | 1 | COMPACT ENTRY PANEL T S5 211  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 6 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741164 14 KIT VIDEO 14 WAY COMPACT COAX PUSH-BUTTON

| 651427 | 1 | COMPACT ENTRY PANEL T S4 207  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 4 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741182 32 KIT VIDEO 32 WAY COMPACT COAX KEYPAD

| 652402 | 1   | COMPACT ENTRY PANEL T/T S4 KEYPAD |
|--------|-----|-----------------------------------|
|        | - 1 |                                   |
| 509024 | 1   | MOUNTING BOX SERIES 4             |
| 600013 | 1   | MODULE OF CONTROL COMPACT         |
| 509057 | 1   | AUDIO/VIDEO MODULE COAX           |
| 509018 | 1   | DC CARDHOLDER                     |
| 750498 | 8   | COAX VIDEO DISTRIBUTOR            |
| 715703 | 1   | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |     |                                   |



### 741166 16 KIT VIDEO 16 WAY COMPACT COAX PUSH-BUTTON

| 651428 | 1 | COMPACT ENTRY PANEL T S4 208  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 4 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741190 40 KIT VIDEO 40 WAY COMPACT COAX KEYPAD

| 652402 | 1  | COMPACT ENTRY PANEL T/T S4 KEYPAI |
|--------|----|-----------------------------------|
| 509024 | 1  | MOUNTING BOX SERIES 4             |
| 600013 | 1  | MODULE OF CONTROL COMPACT         |
| 509057 | 1  | AUDIO/VIDEO MODULE COAX           |
| 509018 | 1  | DC CARDHOLDER                     |
| 750498 | 10 | COAX VIDEO DISTRIBUTOR            |
| 715703 | 1  | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |    |                                   |
|        |    |                                   |



### 741168 18 KIT VIDEO 18 WAY COMPACT COAX PUSH-BUTTON

| 651429 | 1 | COMPACT ENTRY PANEL T S4 209  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509057 | 1 | AUDIO/VIDEO MODULE COAX       |
| 750498 | 5 | COAX VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |







# stainless steel

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full STAINLESS STEEL entry panel including the A/V module.
- Mounting box.
- · Module of control.
- Power supply.
- 1 video distributor for each 4 monitors.

### **MONITORS** DO NOT INCLUDED IN THE KIT

### **AVAILABLE MONITORS**





NEOS HANDSFREE ○ ●



NEOS 7"



ONEX Wi-Fi



E-COMPACT



COMPACT



### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |
|          |              |                   |

REF. QUANTITY DESCRIPTION

REE QUANTITY DESCRIPTION

6

741556

### 741553 3 KIT VIDEO 3 WAY STAINLESS STEEL COAX PUSH-BUTTON

777213 1 STAINLESS STEEL ENTRY PANEL FV S2 103 1 MOUNTING BOX SERIES2 509022 1 MODULE OF CONTROL COMPACT 600013 750498 1 COAX VIDEO DISTRIBUTOR 715303 1 ALV-1'5A / 24VDC POWER SUPPLY



## KIT VIDEO 6 WAY STAINLESS STEEL COAX PUSH-BUTTON

777223 STAINLESS STEEL ENTRY PANEL FV S2 203 MOUNTING BOX SERIES2 509022 600013 MODULE OF CONTROL COMPACT COAX VIDEO DISTRIBUTOR 715303 ALV-1'5A / 24VDC POWER SUPPLY



### 741554 4 KIT VIDEO 4 WAY STAINLESS STEEL COAX PUSH-BUTTON

777222 STAINLESS STEEL ENTRY PANEL FV S2 202 509022 MOUNTING BOX SERIES2 1 MODULE OF CONTROL COMPACT 600013 750498 COAX VIDEO DISTRIBUTOR 715303 1 ALV-1'5A / 24VDC POWER SUPPLY



### 741558 8 KIT VIDEO 8 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777324 | 1 | STAINLESS STEEL ENTRY PANEL FV S3 204 |
|--------|---|---------------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 750498 | 2 | COAX VIDEO DISTRIBUTOR                |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |







REF. QUANTITY DESCRIPTION

### 741560 10 KIT VIDEO 10 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777325 | 1 | STAINLESS STEEL ENTRY PANEL FV S3 20 |
|--------|---|--------------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3                |
| 600013 | 1 | MODULE OF CONTROL COMPACT            |
| 750498 | 3 | COAX VIDEO DISTRIBUTOR               |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY        |



REF. QUANTITY DESCRIPTION

### 741570 20 KIT VIDEO 20 WAY STAINLESS STEEL COAX PUSH-BUTTON

| ///550 | - 1 | STAINLESS STEEL ENTRY PAINEL FV SS Z |
|--------|-----|--------------------------------------|
| 509025 | 1   | MOUNTING BOX SERIES 5                |
| 600013 | 1   | MODULE OF CONTROL COMPACT            |
| 750498 | 5   | COAX VIDEO DISTRIBUTOR               |
| 715303 | 1   | ALV-1'5A / 24VDC POWER SUPPLY        |



### 741562 12 KIT VIDEO 12 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777426 | 1 | STAINLESS STEEL ENTRY PANEL FV S4 2 |
|--------|---|-------------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4               |
| 600013 | 1 | MODULE OF CONTROL COMPACT           |
| 750498 | 3 | COAX VIDEO DISTRIBUTOR              |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY       |



### 741572 22 KIT VIDEO 22 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777531 | 1 | STAINLESS STEEL ENTRY PANEL FV S5: |
|--------|---|------------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5              |
| 600013 | 1 | MODULE OF CONTROL COMPACT          |
| 750498 | 6 | COAX VIDEO DISTRIBUTOR             |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY      |



### 741564 14 KIT VIDEO 14 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777427 | 1 | STAINLESS STEEL ENTRY PANEL FV S4 2 |
|--------|---|-------------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4               |
| 600013 | 1 | MODULE OF CONTROL COMPACT           |
| 750498 | 4 | COAX VIDEO DISTRIBUTOR              |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY       |
|        |   |                                     |



### 741582 32 KIT VIDEO 32 WAY STAINLESS STEEL COAX KEYPAD

| 778401 | 1 | STAINLESS STEEL ENTRY PANEL FVT S4 KEYPAD |
|--------|---|---|
| 509024 | 1 | MOUNTING BOX SERIES 4                     |
| 600013 | 1 | MODULE OF CONTROL COMPACT                 |
| 750498 | 8 | COAX VIDEO DISTRIBUTOR                    |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY             |
|        |   |   |



### 741566 16 KIT VIDEO 16 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777428 | 1 | STAINLESS STEEL ENTRY PANEL FV S4 208 |
|--------|---|---------------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 750498 | 4 | COAX VIDEO DISTRIBUTOR                |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |



### 741590 40 KIT VIDEO 40 WAY STAINLESS STEEL COAX KEYPAD

| 778401<br>509024 | 1<br>1 | STAINLESS STEEL ENTRY PANEL FVT S4 KEYPAD MOUNTING BOX SERIES 4 |
|------------------|--------|---|
| 600013           | 1      | MODULE OF CONTROL COMPACT                                       |
| 750498           | 10     | COAX VIDEO DISTRIBUTOR  |
| 715703           | 1      | ALV-1'5A / 24VDC POWER SUPPLY                                   |
|                  |        |   |



### 741568 18 KIT VIDEO 18 WAY STAINLESS STEEL COAX PUSH-BUTTON

| 777529 | 1 | STAINLESS STEEL ENTRY PANEL FV S5 209 |
|--------|---|---------------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 750498 | 5 | COAX VIDEO DISTRIBUTOR                |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |





# COAXLES

# compact

entry panel

### ENTRY PANEL DIMENSIONS

SERIES ENTRY PANEL MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm

RFF QUANTITY DESCRIPTION





### 745301 745341 1 KIT KVD-1 NEOS MONITOR HANDSET

COMPACT ENTRY PANEL FV S1 101 651151 509021 MOUNTING BOX SERIES 1 509077 AUDIO/VIDEO MODULE COAXLESS S1 751812 751822 NEOS MONITOR HANDSET COAXLESS 751899 NEOS MONITOR WALL BRACKET 715303 ALV-1'5A / 24VDC POWER SUPPLY





### 745321 745361 1 KIT KVD-1 NEOS MONITOR HANDSFREE

651151 COMPACT ENTRY PANEL FV S1 101 509021 MOUNTING BOX SERIES 1 ALIDIO/VIDEO MODULE COAXLESS, S1 509077 MONITOR NEOS HANDSFREE COAXLESS 751816 751826 NEOS MONITOR WALL BRACKET 751899 ALV-1'5A / 24VDC POWER SUPPLY 715303





The NEOS monitor HANDSET and HANDSFREE is also available in black color. See reference

RFF QUANTITY DESCRIPTION



0





### 745302 745342 2 KIT KVD-2 NEOS MONITOR HANDSET

COMPACT ENTRY PANEL FV S1 201 651161 509021 MOUNTING BOX SERIES 1 509077 AUDIO/VIDEO MODULE COAXLESS S1 COAXLESS VIDEO DISTRIBUTOR 753098 751812 751822 NEOS MONITOR HANDSET COAXLESS 751899 NEOS MONITOR WALL BRACKET 715303 ALV-1'5A / 24VDC POWER SUPPLY







### 745322 745362 2 KIT KVD-2 NEOS MONITOR HANDSFREE

651161 COMPACT ENTRY PANEL FV S1 201 509021 MOUNTING BOX SERIES 1 AUDIO/VIDEO MODULE COAXLESS S1 509077 753098 COAXLESS VIDEO DISTRIBUTOR 2 MONITOR NEOS HANDSFREE COAXLESS 751816 751826 NEOS MONITOR WALL BRACKET 751899 1 ALV-1'5A / 24VDC POWER SUPPLY



# COAXLES

# stainless steel

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 145 x 130 mm 132 x 122 x 60 mm

RFF QUANTITY DESCRIPTION



### 745381 745383 1 KIT KVD-1 STAINLESS STEEL **NEOS MONITOR HANDSET**

787111 STAINLESS STEEL PANEL FV S1 101 509021 MOUNTING BOX SERIES 1 NEOS MONITOR HANDSET COAXLESS 751812 751899 NEOS MONITOR WALL BRACKET 715303 ALV-1'5A / 24VDC POWER SUPPLY





### 745382 745384 1

787111 509021 751816 751826 751899 715303

### KIT KVD-1 STAINLESS STEEL NEOS MONITOR HANDSFREE

STAINLESS STEEL PANEL FV S1 101 MOUNTING BOX SERIES 1 MONITOR NEOS HANDSFREE COAXLESS NEOS MONITOR WALL BRACKET ALV-1'5A / 24VDC POWER SUPPLY





The NEOS monitor HANDSET and HANDSFREE is also available in black color. See reference

RFF QUANTITY DESCRIPTION







0

### 745385 745387 2 KIT KVD-2 STAINLESS STEEL **NEOS MONITOR HANDSET**

787121 STAINLESS STEEL PANEL FV S1 101 509021 MOUNTING BOX SERIES 1 751812 NEOS MONITOR HANDSET COAXLESS 751822 NEOS MONITOR WALL BRACKET 753098 COAXLESS VIDEO DISTRIBUTOR 715303 ALV-1'5A / 24VDC POWER SUPPLY







### 745386 745388 2 KIT KVD-2 STAINLESS STEEL **NEOS MONITOR HANDSFREE**

| 787121 |        | 1 | STAINLESS STEEL PANEL FV S1 101 |
|--------|--------|---|---------------------------------|
| 509021 |        | 1 | MOUNTING BOX SERIES 1           |
| 751816 | 751826 | 2 | MONITOR NEOS HANDSFREE COAXLESS |
| 751899 |        | 2 | NEOS MONITOR WALL BRACKET       |
| 753098 |        | 1 | COAXLESS VIDEO DISTRIBUTOR      |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY   |
|        |        |   |                                 |



# COAXLES

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

ENTRY PANEL SERIES MOUNTING BOX

SERIES 1 132 x 122 x 60 mm 145 x 130 mm

RFF QUANTITY DESCRIPTION





1

QUANTITY DESCRIPTION

RFF

745391

651151

509021

509077

751926

751899 715303



COMPACT ENTRY PANEL FV S1 101

AUDIO/VIDEO COAXLESS MODULE S1 NEOS 7 HANDSFREE BLACK MONITOR COAXLESS

NEOS MONITOR WALL BRACKET ALV-1'5A / 24VDC POWER SUPPLY

KIT KVD-1 NEOS 7

MOUNTING BOX SERIES 1

| 746921 | 1 | KIT KVD-1 COMPACT              |
|--------|---|--------------------------------|
| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101  |
| 509021 | 1 | MOUNTING BOX SERIES 1          |
| 509077 | 1 | AUDIO/VIDEO COAXLESS MODULE S1 |
| 752105 | 1 | COLOR DIGITAL COMPACT MONITOR  |
| 750399 | 1 | COMPACT MONITOR WALL BRACKET   |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |
|        |   |                                |







| 747731 | 1 | KIT KVD-1 E-COMPACT WHITE      |
|--------|---|--------------------------------|
| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101  |
| 509021 | 1 | MOUNTING BOX SERIES 1          |
| 509077 | 1 | AUDIO/VIDEO COAXLESS MODULE S1 |
| 751312 | 1 | E-COMPACT MONITOR              |
| 750920 | 1 | E-COMPACT MONITOR WALL BRACKET |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |
|        |   |                                |



745493 1

| KIT KVD-1 | ONEX WI-FI |
|-----------|------------|

| 651151 | 1 | COMPACT ENTRY PANEL FV S1 101               |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                       |
| 509077 | 1 | AUDIO/VIDEO COAXLESS MODULE S1              |
| 751946 | 1 | ONEX Wi-Fi HANDSFREE BLACK MONITOR COAXLESS |
| 751899 | 1 | NEOS MONITOR WALL BRACKET                   |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY               |
|        |   |   |

......

..........



# COAXLES

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 132 x 122 x 60 mm 145 x 130 mm

RFF QUANTITY DESCRIPTION














#### 747732 2 KIT KVD-2 E-COMPACT WHITE

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201  |
|--------|---|--------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1          |
| 509077 | 1 | AUDIO/VIDEO COAXLESS MODULE S1 |
| 751312 | 2 | E-COMPACT MONITOR              |
| 750920 | 2 | E-COMPACT MONITOR WALL BRACKET |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR     |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY  |
|        |   |                                |

RFF QUANTITY DESCRIPTION



#### 745392 2 KIT KVD-2 NEOS 7

| 651161 | 1 | COMPACT ENTRY PANEL FV S1 201           |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                   |
| 509077 | 1 | AUDIO/VIDEO COAXLESS MODULE S1          |
| 751926 | 2 | NEOS 7 HANDSFREE BLACK MONITOR COAXLESS |
| 751899 | 2 | NEOS MONITOR WALL BRACKET               |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR              |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY           |
|        |   |   |



# COAXLESS

# stainless steel

entry panel

### ENTRY PANEL DIMENSIONS

SERIES ENTRY PANEL MOUNTING BOX

**SERIES 1** 145 x 130 mm 132 x 122 x 60 mm

REF. QUANTITY DESCRIPTION



### 746979 1 KIT KVD-1 STAINLESS STEEL COMPACT

| 787111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 752105 | 1 | COLOR DIGITAL COMPACT MONITOR         |
| 750399 | 1 | COMPACT MONITOR WALL BRACKET          |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |

REF. QUANTITY DESCRIPTION





### 745393 1 KIT KVD-1 INOX NEOS 7

| 787111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101   |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                   |
| 751926 | 1 | NEOS 7 HANDSFREE BLACK MONITOR COAXLESS |
| 751899 | 1 | NEOS MONITOR WALL BRACKET               |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY           |
|        |   |   |





### 747745 1 KIT KVD-1 STAINLESS STEEL E-COMPACT WHITE

| 787111 | 1                          | STAINLESS STEEL ENTRY PANEL FV S1 101 |
|--------|----------------------------|---------------------------------------|
| 509021 | 1                          | MOUNTING BOX SERIES 1                 |
| 751312 | 1                          | E-COMPACT MONITOR                     |
| 750920 | 1                          | E-COMPACT MONITOR WALL BRACKET        |
| 715303 | 1                          | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |                            |                                       |
|        | 509021<br>751312<br>750920 | 509021 1<br>751312 1<br>750920 1      |







### 745496 1 KIT KVD-1 INOX ONEX WI-FI

| 787111 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 101       |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                       |
| 751946 | 1 | ONEX Wi-Fi HANDSFREE BLACK MONITOR COAXLESS |
| 751899 | 1 | NEOS MONITOR WALL BRACKET                   |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY               |
|        |   |   |





# stainless steel

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX SERIES 1 145 x 130 mm 132 x 122 x 60 mm

QUANTITY DESCRIPTION RFF



RFF

QUANTITY DESCRIPTION





#### KIT KVD-2 STAINLESS STEEL COMPACT 746608

| 787121 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 752105 | 2 | COLOR DIGITAL COMPACT MONITOR         |
| 750399 | 2 | COMPACT MONITOR WALL BRACKET          |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |

#### 745394 2 KIT KVD-2 INOX NEOS 7

| 787121 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201   |
|--------|---|---|
| 509021 | 1 | MOUNTING BOX SERIES 1                   |
| 751926 | 2 | NEOS 7 HANDSFREE BLACK MONITOR COAXLESS |
| 751899 | 2 | NEOS MONITOR WALL BRACKET               |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR              |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY           |
|        |   |   |







#### 747769 2 KIT KVD-2 STAINLESS STEEL E-COMPACT WHITE

| 787121 | 1 | STAINLESS STEEL ENTRY PANEL FV S1 201 |
|--------|---|---------------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1                 |
| 751312 | 2 | E-COMPACT MONITOR                     |
| 750920 | 2 | E-COMPACT MONITOR WALL BRACKET        |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |

## COAXLES

# compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full COMPACT entry panel including the A/V module.
- · Mounting box.
- · Module of control.
- · Power supply.
- 1 video distributor for each 4 monitors.



### **AVAILABLE MONITORS**

NEOS HANDSET ○ ●





NEOS 7"



ONEX Wi-Fi



E-COMPACT



COMPACT



### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |
|          |              |                   |

REF. QUANTITY DESCRIPTION

REF. QUANTITY DESCRIPTION

### 741103 3 KIT VIDEO 3 WAY COMPACT COAXLESS PUSH-BUTTON

| 651213 | 1 | COMPACT ENTRY PANEL T S2 103  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



741106 6 KIT VIDEO 6 WAY COMPACT COAXLESS PUSH-BUTTON

| 651223 | 1 | COMPACT ENTRY PANEL T S2 203  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 2 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741104 4 KIT VIDEO 4 WAY COMPACT COAXLESS PUSH-BUTTON

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741108 8 KIT VIDEO 8 WAY COMPACT COAXLESS PUSH-BUTTON

| 651224 | 1 | COMPACT ENTRY PANEL T S2 204  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 2 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |





## COAXLESS

REF. QUANTITY DESCRIPTION

### 741110 10 KIT VIDEO 10 WAY COMPACT COAXLESS PUSH-BUTTON

| 651325 | 1 | COMPACT ENTRY PANEL T S3 205  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 3 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



REF. QUANTITY DESCRIPTION

# 741120 20 KIT VIDEO 20 WAY COMPACT COAXLESS PUSH-BUTTON

| 651540 | 1 | COMPACT ENTRY PANEL T S5 210  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 5 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741112 12 KIT VIDEO 12 WAY COMPACT COAXLESS PUSH-BUTTON

| 651326 | 1 | COMPACT ENTRY PANEL T S3 206  |
|--------|---|-------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 3 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



### 741122 22 KIT VIDEO 22 WAY COMPACT COAXLESS PUSH-BUTTON

| 651541 | 1 | COMPACT ENTRY PANEL T S5 211  |
|--------|---|-------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 6 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741114 14 KIT VIDEO 14 WAY COMPACT COAXLESS PUSH-BUTTON

| 651427 | 1 | COMPACT ENTRY PANEL T S4 207  |
|--------|---|-------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4         |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS   |
| 753098 | 4 | COAXLESS VIDEO DISTRIBUTOR    |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



### 741132 32 KIT VIDEO 32 WAY COMPACT COAXLESS KEYPAD

| 652402 | 1 | COMPACT ENTRY PANEL T/T S4 KEYPAD |
|--------|---|-----------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4             |
| 600013 | 1 | MODULE OF CONTROL COMPACT         |
| 509058 | 1 | AUDIO/VIDEO MODULE COAXLESS       |
| 509018 | 1 | DC CARDHOLDER                     |
| 753098 | 8 | COAXLESS VIDEO DISTRIBUTOR        |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |   |                                   |



### 741116 16 KIT VIDEO 16 WAY COMPACT COAXLESS PUSH-BUTTON

| 651428<br>509024 | 1<br>1 | COMPACT ENTRY PANEL T S4 208<br>MOUNTING BOX SERIES 4 |
|------------------|--------|---|
| 600013           | 1      | MODULE OF CONTROL COMPACT                             |
| 509058           | 1      | AUDIO/VIDEO MODULE COAXLESS                           |
| 753098           | 4      | COAXLESS VIDEO DISTRIBUTOR                            |
| 715303           | 1      | ALV-1'5A / 24VDC POWER SUPPLY                         |



### 741140 40 KIT VIDEO 40 WAY COMPACT COAXLESS KEYPAD

| 652402 | 1  | COMPACT ENTRY PANEL T/T S4 KEYPAD |
|--------|----|-----------------------------------|
| 509024 | 1  | MOUNTING BOX SERIES 4             |
| 600013 | 1  | MODULE OF CONTROL COMPACT         |
| 509058 | 1  | AUDIO/VIDEO MODULE COAXLESS       |
| 509018 | 1  | DC CARDHOLDER                     |
| 753098 | 10 | COAXLESS VIDEO DISTRIBUTOR        |
| 715703 | 1  | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |    |                                   |



### 741118 18 KIT VIDEO 18 WAY COMPACT COAXLESS PUSH-BUTTON

| 651429 | 1                                    | COMPACT ENTRY PANEL T S4 209                 |
|--------|--------------------------------------|--|
| 509024 | 1                                    | MOUNTING BOX SERIES 4                        |
| 600013 | 1                                    | MODULE OF CONTROL COMPACT                    |
| 509058 | 1                                    | AUDIO/VIDEO MODULE COAXLESS                  |
| 753098 | 5                                    | COAXLESS VIDEO DISTRIBUTOR                   |
| 715303 | 1                                    | ALV-1'5A / 24VDC POWER SUPPLY                |
|        |                                      |  |
|        | 509024<br>600013<br>509058<br>753098 | 509024 1<br>600013 1<br>509058 1<br>753098 5 |





## COAXLES

# stainless steel

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (monitors)

- · Full STAINLESS STEEL entry panel including the A/V module.
- Mounting box.
- · Module of control.
- · Power supply.
- 1 video distributor for each 4 monitors.



### **AVAILABLE MONITORS**







NEOS 7"



ONEX Wi-Fi



E-COMPACT



COMPACT



### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |
|          |              |                   |

REF. QUANTITY DESCRIPTION

REF. QUANTITY DESCRIPTION

### 741503 3 KIT VIDEO 3 WAY STAINLESS STEEL PUSH-BUTTON

| 787213 | 1 | STAINLESS STEEL ENTRY PANEL FV S2 10 |
|--------|---|--------------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2                |
| 600013 | 1 | MODULE OF CONTROL COMPACT            |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR           |
| 715303 | 1 | ALV-1'54 / 24VDC POWER SLIPPLY       |



32 203

| 787223 | 1 | STAINLESS STEEL ENTRY PANEL FV S2 |
|--------|---|-----------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2             |
| 600013 | 1 | MODULE OF CONTROL COMPACT         |
| 753098 | 2 | COAXLESS VIDEO DISTRIBUTOR        |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY     |
|        |   |                                   |



### 741504 4 KIT VIDEO 4 WAY STAINLESS STEEL PUSH-BUTTON

| 787222 | 1 | STAINLESS STEEL ENTRY PANEL FV S2 202 |
|--------|---|---------------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES 2                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 753098 | 1 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |
|        |   |                                       |



### 741508 8 KIT VIDEO 8 WAY STAINLESS STEEL PUSH-BUTTON

741506 6 KIT VIDEO 6 WAY STAINLESS STEEL PUSH-BUTTON

| 787324 | 1 | STAINLESS STEEL ENTRY PANEL FV S3 204 |
|--------|---|---------------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 753098 | 2 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |





## COAXLESS

REF. QUANTITY DESCRIPTION

### 741510 10 KIT VIDEO 10 WAY STAINLESS STEEL PUSH-BUTTON

| 787325 | 1 | STAINLESS STEEL ENTRY PANEL FV S3 2 |
|--------|---|-------------------------------------|
| 509023 | 1 | MOUNTING BOX SERIES 3               |
| 600013 | 1 | MODULE OF CONTROL COMPACT           |
| 753098 | 3 | COAXLESS VIDEO DISTRIBUTOR          |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY       |



REF. QUANTITY DESCRIPTION

### 741520 20 KIT VIDEO 20 WAY STAINLESS STEEL PUSH-BUTTON

| 787530 | 1 | STAINLESS STEEL ENTRY PANEL FV S |
|--------|---|----------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5            |
| 600013 | 1 | MODULE OF CONTROL COMPACT        |
| 753098 | 5 | COAXLESS VIDEO DISTRIBUTOR       |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY    |



### 741512 12 KIT VIDEO 12 WAY STAINLESS STEEL PUSH-BUTTON

| 787426 | 1 | STAINLESS STEEL ENTRY PANEL FV S4 20 |
|--------|---|--------------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4                |
| 600013 | 1 | MODULE OF CONTROL COMPACT            |
| 753098 | 3 | COAXLESS VIDEO DISTRIBUTOR           |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SLIPPLY       |



### 741522 22 KIT VIDEO 22 WAY STAINLESS STEEL PUSH-BUTTON

| 787531 | 1 | STAINLESS STEEL ENTRY PANEL FV S5 211 |
|--------|---|---------------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 753098 | 6 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |



### 741514 14 KIT VIDEO 12 WAY STAINLESS STEEL PUSH-BUTTON

| 787427 | 1 | STAINLESS STEEL ENTRY PANEL FV S4 2 |
|--------|---|-------------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4               |
| 600013 | 1 | MODULE OF CONTROL COMPACT           |
| 753098 | 4 | COAXLESS VIDEO DISTRIBUTOR          |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY       |
|        |   |                                     |



### 741532 32 KIT VIDEO 32 WAY STAINLESS STEEL KEYPAD

| 788401 | 1 | STAINLESS STEEL ENTRY PANEL FV/T S4 KEYPAD |
|--------|---|--|
| 509024 | 1 | MOUNTING BOX SERIES 4                      |
| 600013 | 1 | MODULE OF CONTROL COMPACT                  |
| 753098 | 8 | COAXLESS VIDEO DISTRIBUTOR                 |
| 715703 | 1 | ALV-1'5A / 24VDC POWER SUPPLY              |



### 741516 16 KIT VIDEO 16 WAY STAINLESS STEEL PUSH-BUTTON

| 787428 | 1 | STAINLESS STEEL ENTRY PANEL FV S4 208 |
|--------|---|---------------------------------------|
| 509024 | 1 | MOUNTING BOX SERIES 4                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 753098 | 4 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SLIPPLY        |



### 741540 40 KIT VIDEO 40 WAY STAINLESS STEEL KEYPAD

| 788401 | 1   | STAINLESS STEEL ENTRY PANEL FV/T S4 KEYPAD |
|--------|-----|--|
| 509024 | - 1 | MOUNTING BOX SERIES 4                      |
| 600013 | 1   | MODULE OF CONTROL COMPACT                  |
| 753098 | 10  | COAXLESS VIDEO DISTRIBUTOR                 |
| 715703 | 1   | ALV-1'5A / 24VDC POWER SUPPLY              |



### 741518 18 KIT VIDEO 18 WAY STAINLESS STEEL PUSH-BUTTON

| 787529 | 1 | STAINLESS STEEL ENTRY PANEL FV S5 209 |
|--------|---|---------------------------------------|
| 509025 | 1 | MOUNTING BOX SERIES 5                 |
| 600013 | 1 | MODULE OF CONTROL COMPACT             |
| 753098 | 5 | COAXLESS VIDEO DISTRIBUTOR            |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY         |



# AUDIO DIGITAL

## Kits of 1 & 2 ways

# compact

entry panel

### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm



REF.

The NEOS HANDSET is also available in black color. See reference

QUANTITY REF. DESCRIPTION



744201 744241 1



KIT KFD-1 NEOS

| 51131 |        | 1 | COMPACT ENTRY PANEL F S1 101  |
|-------|--------|---|-------------------------------|
| 09021 |        | 1 | MOUNTING BOX SERIES 1         |
| 09079 |        | 1 | AUDIO DIGITAL MODULE S1       |
| 01812 | 701822 | 1 | NEOS DIGITAL HANDSET          |
| 15303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|       |        |   |                               |



QUANTITY DESCRIPTION

| 744202 | 744242 | 2 | KIT KFD-2 NEOS                |
|--------|--------|---|-------------------------------|
| 651141 |        | 1 | COMPACT ENTRY PANEL F S1 201  |
| 509021 |        | 1 | MOUNTING BOX SERIES 1         |
| 509079 |        | 1 | AUDIO DIGITAL MODULE S1       |
| 701812 | 701822 | 2 | NEOS DIGITAL HANDSET          |
| 715303 |        | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |        |   |                               |
|        |        |   |                               |



### Kits of 1 & 2 ways

# compact entry panel

#### **ENTRY PANEL DIMENSIONS**

SERIES ENTRY PANEL MOUNTING BOX

SERIES 1 145 x 130 mm 132 x 122 x 60 mm

QUANTITY DESCRIPTION REF.





| 49811 | 1 | KIT KFD-1 COMPAC |
|-------|---|------------------|

| 651131 | 1 | COMPACT ENTRY PANEL F S1 10   |
|--------|---|-------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1         |
| 509079 | 1 | AUDIO DIGITAL MODULE S1       |
| 700005 | 1 | COMPACT DIGITAL HANDSET       |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPL' |

QUANTITY DESCRIPTION



| 749812 | 2 | KIT KFD-2 COMPACT |
|--------|---|-------------------|

| 651141 | 1 | COMPACT ENTRY PANEL F S1 201  |
|--------|---|-------------------------------|
| 509021 | 1 | MOUNTING BOX SERIES 1         |
| 509079 | 1 | AUDIO DIGITAL MODULE S1       |
| 700005 | 2 | COMPACT DIGITAL HANDSET       |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |



## AUDIO DIGITAL

### Kits for buildings

## compact

entry panel

They include all the necessary material, to perform a standard installation, except the indoor units (handsets).

- Full COMPACT entry panel including the A/V module.
- Mounting box.
- · Module of control.
- · Power supply .

#### **HANDSET** DO NOT INCLUDED IN THE KIT

#### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 319 x 130 x 60 mm |
| SERIES 5 | 400 x 130 mm | 390 x 130 x 60 mm |



#### **AVAILABLE HANDSETS**

NEOS COMPACT





REF. QUANTITY DESCRIPTION

#### 741303 3 KIT AUDIO 3 WAY COMPACT PUSH-BUTTON

651213 COMPACT ENTRY PANEL T S2 103 509022 MOUNTING BOX SERIES2 MODULE OF CONTROL COMPACT 600013 509050 AUDIO DIGITAL MODULE ALV-1'5A / 24VDC POWER SUPPLY



#### 741304 4 KIT AUDIO 4 WAY COMPACT PUSH-BUTTON

| 651222 | 1 | COMPACT ENTRY PANEL T S2 202  |
|--------|---|-------------------------------|
| 509022 | 1 | MOUNTING BOX SERIES2          |
| 600013 | 1 | MODULE OF CONTROL COMPACT     |
| 509050 | 1 | AUDIO DIGITAL MODULE          |
| 715303 | 1 | ALV-1'5A / 24VDC POWER SUPPLY |
|        |   |                               |



#### 741306 6 KIT AUDIO 6 WAY COMPACT PUSH-BUTTON

| 651223 | 3 1 | С | OMPACT ENTRY PANEL T S2 203  |
|--------|-----|---|------------------------------|
| 509022 | 2 1 | N | IOUNTING BOX SERIES2         |
| 600013 | 3 1 | N | IODULE OF CONTROL COMPACT    |
| 509050 | ) 1 | Α | UDIO DIGITAL MODULE          |
| 715303 | 3 1 | Α | LV-1'5A / 24VDC POWER SUPPLY |
|        |     |   |                              |



#### Kits for buildings

REF. QUANTITY DESCRIPTION

#### 741308 8 KIT AUDIO 8 WAY COMPACT PUSH-BUTTON

651224 COMPACT ENTRY PANEL T S2 204 509022 MOUNTING BOX SERIES2 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE ALV-1'5A / 24VDC POWER SUPPLY 715303



#### REF. QUANTITY DESCRIPTION

#### 741318 18 KIT AUDIO 18 WAY COMPACT PUSH-BUTTON

COMPACT ENTRY PANEL T S4 209 MOUNTING BOX SERIES 4 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE 715303 ALV-1'5A / 24VDC POWER SUPPLY



#### 741310 10 KIT AUDIO 10 WAY COMPACT PUSH-BUTTON

651325 COMPACT ENTRY PANEL T S3 205 509023 MOUNTING BOX SERIES 3 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE ALV-1'5A / 24VDC POWER SUPPLY



#### 741320 20 KIT AUDIO 20 WAY COMPACT PUSH-BUTTON

651540 COMPACT ENTRY PANEL T S5 210 509025 MOUNTING BOX SERIES 5 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE ALV-1'5A / 24VDC POWER SUPPLY



#### 741312 12 KIT AUDIO 12 WAY COMPACT PUSH-BUTTON

COMPACT ENTRY PANEL T S3 206 651326 MOUNTING BOX SERIES 3 509023 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE 715303 ALV-1'5A / 24VDC POWER SUPPLY



#### KIT AUDIO 22 WAY COMPACT PUSH-BUTTON

651541 COMPACT ENTRY PANEL T S5 211 509025 MOUNTING BOX SERIES 5 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE ALV-1'5A / 24VDC POWER SUPPLY



#### 741314 14 KIT AUDIO 14 WAY COMPACT PUSH-BUTTON

COMPACT ENTRY PANEL T S4 207 651427 MOUNTING BOX SERIES 4 509024 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE 715303 ALV-1'5A / 24VDC POWER SUPPLY



#### 741332 KIT AUDIO COMPACT KEYPAD

652402 COMPACT ENTRY PANEL T/T S4 KEYPAD 509024 MOUNTING BOX SERIES 4 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE 509018 DC CARDHOLDER ALV-1'5A / 24VDC POWER SUPPLY



#### 731316 16 KIT AUDIO 16 WAY COMPACT PUSH-BUTTON

651428 COMPACT ENTRY PANEL T S4 208 509024 MOUNTING BOX SERIES 4 600013 MODULE OF CONTROL COMPACT 509050 AUDIO DIGITAL MODULE ALV-1'5A / 24VDC POWER SUPPLY 715303



## ANALOG / LT AUDIO

## CONVENTIONAL INSTALLATION 4+N

#### All the KITS include:

- Full COMPACT entry panel including the AUDIO module.
- Mounting box.
- · Power supply.
- NEOS analog handset.

## neos



#### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 1 | 145 x 130 mm | 132 x 122 x 60 mm |
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 248 x 130 x 60 mm |





KF-1

KF-2









KF-5 / KF-6

5 / KF-6 KF-7 / KF-8





KF-9 / KF-10

KF-11 / KF-12

|          | REF.    |        | DESCRIPTION                      |
|----------|---------|--------|----------------------------------|
|          | $\circ$ | •      |                                  |
| SERIES 1 | 744301  | 744341 | KIT KF-1 ANALOG DOOR ENTRY NEOS  |
|          | 744302  | 744342 | KIT KF-2 ANALOG DOOR ENTRY NEOS  |
| SERIES 2 |         | 744343 | KIT KF-3 ANALOG DOOR ENTRY NEOS  |
|          | 744304  | 744344 | KIT KF-4 ANALOG DOOR ENTRY NEOS  |
|          | 744305  | 744345 | KIT KF-5 ANALOG DOOR ENTRY NEOS  |
|          | 744306  | 744346 | KIT KF-6 ANALOG DOOR ENTRY NEOS  |
|          | 744307  | 744347 | KIT KF-7 ANALOG DOOR ENTRY NEOS  |
|          | 744308  | 744348 | KIT KF-8 ANALOG DOOR ENTRY NEOS  |
| SERIES 3 | 744309  | 744349 | KIT KF-9 ANALOG DOOR ENTRY NEOS  |
|          | 744310  | 744350 | KIT KF-10 ANALOG DOOR ENTRY NEOS |
|          | 744311  | 744351 | KIT KF-11 ANALOG DOOR ENTRY NEOS |
|          | 744312  | 744352 | KIT KF-12 ANALOG DOOR ENTRY NEOS |



## CONVENTIONAL INSTALLATION 4+N

All the KITS include:

- Full COMPACT entry panel including the AUDIO module.
- Mounting box.
- · Power supply.
- COMPACT analog handset.

## compact



#### **ENTRY PANEL DIMENSIONS**

| SERIES   | ENTRY PANEL  | MOUNTING BOX      |
|----------|--------------|-------------------|
| SERIES 1 | 145 x 130 mm | 132 x 122 x 60 mm |
| SERIES 2 | 215 x 130 mm | 203 x 130 x 60 mm |
| SERIES 3 | 262 x 130 mm | 319 x 130 x 60 mm |
| SERIES 4 | 330 x 130 mm | 390 x 130 x 60 mm |





KF-1

KF-2









KF-3

KF-4

KF-5 / KF-6

KF-7 / KF-8







KF-9 / KF-10

KF-11 / KF-12

KF-14

| REF.   | DESCRIPTION  |
|--------|--|
| 749701 | KIT KF-1 ANALOG DOOR ENTRY COMPACT   |
| 749702 | KIT KF-2 ANALOG DOOR ENTRY COMPACT   |
| 749703 | KIT KF-3 ANALOG DOOR ENTRY COMPACT   |
| 749704 | KIT KF-4 ANALOG DOOR ENTRY COMPACT   |
| 749705 | KIT KF-5 ANALOG DOOR ENTRY COMPACT   |
| 749706 | KIT KF-6 ANALOG DOOR ENTRY COMPACT   |
| 749707 | KIT KF-7 ANALOG DOOR ENTRY COMPACT   |
| 749708 | KIT KF-8 ANALOG DOOR ENTRY COMPACT   |
| 749709 | KIT KF-9 ANALOG DOOR ENTRY COMPACT   |
| 749710 | KIT KF-10 ANALOG DOOR ENTRY COMPACT  |
| 749711 | KIT KF-11 ANALOG DOOR ENTRY COMPACT  |
| 749712 | KIT KF-12 ANALOG DOOR ENTRY COMPACT  |
| 749714 | KIT KF-14 ANALOG DOOR ENTRY COMPACT  |
| 749543 | KIT KF-1 ANALOG DOOR ENTRY COMPACT 2HT   |
|        | 2 WIRES INSTALLATION   |
|        | 749701<br>749702<br>749703<br>749704<br>749705<br>749706<br>749707<br>749708<br>749709<br>749710<br>749711<br>749712 |

# auta Bringing people together

## Door opener



### Door opener

| 1_          | REF.   | DESCRIPTION  |
|-------------|--------|--|
| ţ1          | 720001 | DOOR-OPENER MOD. A Automatic. 12V AC   |
| þ           | 720002 | DOOR-OPENER MOD. AD Automatic with Unlocking. 12V AC   |
| ţ1          | 720003 | <b>DOOR-OPENER MOD. N</b> Normal. 12V AC   |
| <b>[</b> 1] | 720004 | <b>DOOR-OPENER MOD. ND</b> Normal with Unlocking. 12V AC   |
| <b>[</b> 1] | 720008 | DOOR-OPENER MOD. A 12VDC Automatic. 12V DC   |
| [1]         | 720016 | DOOR-OPENER MOD. A 24VDC Automatic. 24V DC   |
|             | 720017 | UNIVERSAL DOOR-OPENER ADF/S 10-24V AC/DC Last generation door-release. Small (like switcher box) (with 25,5 mm depth) It's coil works with AC or DC current with a range from 10 to 24 V |
|             | 721001 | ARMOR MOD. G Armor for flush door-opener.  |
|             | 721004 | <b>DOUBLE CONTACT</b> To be flushed in the frame of the door. Not visible cables.  |



# Spare parts



### Spare parts

#### **ENTRY PANEL**

| REF.   | DESCRIPTION                                |
|--------|--|
| 509007 | AUTA KEY MODULE                            |
| 509009 | KEYPAD + DISPLAY MODULE                    |
| 509019 | KEYPAD + DISPLAY FOR DIRECTORY PANEL       |
| 150255 | CARDHOLDER PLASTIC GLASS                   |
| 150260 | LCD DISPLAY PLASTIC GLASS                  |
| 509814 | LIGHTING PCB FOR DECOR ENTRY PANEL 12VAC   |
| 509830 | LIGHTING PCB FOR COMPACT ENTRY PANEL 12VAC |
| 509834 | LIGHTING PCB FOR COMPACT ENTRY PANEL 24VDC |
| 509820 | ACCESSORIES BAG FOR COMPACT ENTRY PANEL    |
| 509826 | ACCESSORIES BAG FOR DECOR ENTRY PANEL      |
| 509036 | STAINLESS STEEL CARDHOLDER                 |
| 150316 | PLASTIC COVER BOX FOR MODULE OF CONTROL    |
|        |  |

#### **PUSH-BUTTONS**

| REF.   | DESCRIPTION   |
|--|---|
| 080088<br>080090<br>080078<br>509808<br>509841<br>509842<br>509843<br>509844<br>509845<br>509846 | STAINLESS STEEL CARDHOLDER STAINLESS STEEL PUSH-BUTTON (22 MM) STAINLESS STEEL PUSH-BUTTON (16 MM) 2HT DECOR SINGLE PUSH-BUTTON PACK 10 COMPACT SINGLE PUSH-BUTTONS PACK 10 COMPACT ANALOG DOUBLE PUSH-BUTTONS PACK 10 COMPACT DIGITAL DOUBLE PUSH-BUTTONS PACK 10 DECOR SINGLE PUSH-BUTTONS PACK 10 DECOR ANALOG DOUBLE PUSH-BUTTONS PACK 10 DECOR DIGITAL DOUBLE PUSH-BUTTONS |
| 007040   | THE TO DESCRIBE DESCRIBE TOOM BOTTONS   |

#### **POWER**

| REF. | DESCRIPTION |
|------|-------------|
|      |             |

730151 POWER SUPPLY ADAPTOR

#### **AUDIO MODULES**

| REF.   | DESCRIPTION                               |
|--------|---|
| 509001 | DIGITAL DECOR AUDIO MODULE MF-D           |
| 509014 | DIGITAL DECOR ANALOG AUDIO MODULE MF-2H   |
| 509031 | VISUALTECH DECOR AUDIO MODULE MF-D 5H     |
| 509085 | ANALOG COMPACT MODULE MF-S                |
| 090022 | AUDIO GRILL FOR COMPACT ENTRY PANEL       |
| 090023 | AUDIO/VIDEO GRILL FOR COMPACT ENTRY PANEL |
| 150244 | AUDIO GRILL FOR DECOR ENTRY PANEL         |
|        |   |

#### AUDIO/VIDEO MODULE

| REF.   | DESCRIPTION   |
|--|---|
| 509004<br>509005<br>509011<br>509086<br>509087<br>509061 | DECOR COLOR VIDEO MODULE 900 MV-S DECOR COLOR COAX VIDEO MODULE MV-D DECOR COLOR COAXLESS VIDEO MODULE MV-D COMPACT AUDIO/VIDEO MODULE MF-S COMPACT AUDIO/VIDEO MODULE AV-900 MF-S COMPACT COLOR CCD CAMERA |
| 100020   | LENS GLASS FOR COMPACT CAMERA   |
| 150218   | LENS GLASS FOR DECOR CAMERA   |
|  |   |

#### **HANDSETS**

| REF.   | DESCRIPTION                                |
|--------|--|
| 507080 | NEOS WHITE HANDSET                         |
| 507081 | NEOS BLACK HANDSET                         |
| 507020 | DIGITAL DECOR HANDSET ONLY                 |
| 507025 | ANALOG DECOR HANDSET ONLY                  |
| 507038 | SILVER COMPACT HANDSET ONLY                |
| 507040 | COMPACT HANDSET ONLY                       |
| 507050 | 2HT COMPACT HANDSET ONLY                   |
| 507055 | COMPACT INTERCOM WITH DISPLAY HANDSET ONLY |
| 507066 | COMPACT INTERCOM W/O DISPLAY HANDSET ONLY  |
|        |  |



## Access control



#### **STANDALONE**

REF.

DESCRIPTION



#### 850105

#### STAND-ALONE 4K PROXIMITY READER

Stand-alone proximity reader. EM technology (125Khz). Made in high quality aluminum. Management of up to 4000 users. Can be installed embedded or surface. Internal/external installation. 12/24 ac/dc.



#### 940101

#### STAINLESS STEEL STAND-ALONE 4K PROXIMITY READER

Stand-alone proximity reader. EM technology (125Khz). Made in high quality polished stainless steel. Management of up to 4000 users. Can be installed embedded or surface. Internal/external installation. 12/24 ac/dc.



#### 507222

#### STAND-ALONE 4K PROXIMITY READER

Stand-alone 4K proximity module that can be installed at COMPACT and STAINLESS STEEL panels. EM technology (125Khz). Management of up to 4000 users. 12/24 ac/dc.



#### 721150

#### STAND-ALONE PROXIMITY READER

Stand-alone proximity reader far access control that allow up to 4000 different users. EM technology (125Khz). Made in high quality polycarbonate. Surface installation. Internal/external installation, IP66. 12/24 ac/dc.



#### 721117

#### **EM PROXIMITY CARD**

Proximity card numerated ISO 4002. EM technology (125Khz). Can be personalized.



#### 721118

#### **EM PROXIMITY KEY FOB**

Proximity KEY FOB numerated ISO 4002. EM technology (125Khz)



#### 850101

#### COMPACT AUTA KEY

Keypad for access control that allow up to 300 different codes. Made in high quality aluminum. Management of 2 independent doors. Can be installed embedded or surface. Outdoor/Indoor. 12/24 ac/dc.



#### 940100

#### STAINLESS STEEL AUTA KEY

Keypad for access control that allow up to 300 different codes. Made in high quality aluminum. Management of 2 independent doors. Can be installed embedded or surface. Outdoor/Indoor. installation. 12/24 ac/dc.



#### 721162

#### STAND-ALONE MINI BK KEYPAD + PROXIMITY

Keypad + Proximity that allow up to 1000 different codes\_cards. EM technology (125 Khz). Made in high quality ABS. Surface installation. Internal/external installation, IP65. 12/24 ac/dc.

#### **STANDALONE**

RFF

DESCRIPTION



721102

ANTI-VANDAL STAND-ALONE MINI KEYPAD

Keypad for access control that allow up to 99 different codes. Made in high quality EXTRA ALUMINUM. Surface installation. Internal/external installation, IP65. 2 different outputs. 12/24 ac/dc. PROMOTION UNTIL END OF STOCK



721163

STAND-ALONE BIOMETRIC READER BK

Finger print reader far access control. Up to 98 finger prints. Made in high quality ABS. Surface installation. Internal/external installation, IP65. 12Vdc.



721154

**BIOMETRIC + PROXIMITY READER STAND-ALONE** 

DUAL reader. Include finger print read and proximity read of cards/fobs. Up to 98 finger prints and 2000 cards. EM and HID technology (125Khz). Made in high quality aluminum. Surface installation. Internal/ external installation, IP65. 12Vdc.



721155

**BIOMETRIC + KEYPAD READER STAND-ALONE** 

DUAL reader. Include finger print read and code. Up to 97 finger prints and 97 codes. Made in high quality aluminum. Surface installation. Internal/external installation, IP65. 12Vdc. IP65. 12Vcc.



721114

ANTI-VANDAL STAND-ALONE DUAL READER

DUAL READER Keypad + Proximity reader far access control that allow up to 99 different codes + EM cards. Made in high quality EXTRA ALUMINUM. Surface installation. Internal/external installation, IP65. 2 different outputs. 12/24 ac/dc. **PROMOTION UNTIL END OF STOCK** 



721164

Button with capacitive technology. State indicator by LEO illumination. Made in high quality ABS. Surface installation. Internal/external installation, IP54. 12/24 ac/dc.



721092

STAND-ALONE WIRELESS RECEIVER

Radio frequency receiver (868 Mhz). Storage up to 500 emitters. 2 programable relays. Integrated antenna. Internal/external installation, IP54. 12/24 ac/dc.



721094

EMITTER MINI

2 channels radio frequency emitter. Reach 100m

#### STANDALONE. OFF-LINE MANAGEMENT

REF.

DESCRIPTION



721171

#### OFF-LINE MANAGEMENT SOFTWARE

Software that allow to manage OFF-LINE access control systems. Platform, WINDOWS. Management of events. Management through MicroUSB or through programming MIFARE 4K card (721168 USB reader). UNLIMITED number of different installations. Up to 80 doors on each installation.



721169

#### MIFARE STAND-ALONE PROXIMITY READER

Stand-alone proximity reader far access control compatible with cards/key fobs MIFARE Classic 1K and 4K. MIFARE technology (13,56Mhz). Recording up to 3500 events. Made in high quality polycarbonate. Surface installation. Internal/external installation, IP65. 12Vdc.



721170

#### 1K MIFARE PROXIMITY CARD

Proximity card 150 13,56Mhz. MIFARE Classic 1K technology. Can be personalized.



721172

#### 4K MIFARE PROXIMITY CARD

Proximity card ISO 13,56Mhz. MIFARE Classic 4K technology.



721173

#### **4K MIFARE KEYFOB**

Proximity card 150 13,56Mhz. MIFARE Classic 1K technology. Can be personalized.



721168

#### **USB PROXIMITY ENROLLER**

Universal USB proximity reader that allow to read proximity cards EM (125Khz) also MIFARE Classic 1 K and 4K (13,56Mhz) and introduce them into the access control management software.

#### **NETWORK**

DESCRIPTION



#### 721156 **CONTROL UNIT**

Controller unit, connection of 2 readers per unit. Unlimited number of controllers per system. Connection of auxiliary buttons, programable inputs/outputs. 15.000 users and 30.000 events. Native TCP/IP. Programable WIEGAND 8-128 bits. 12Vdc.



#### 721140

#### MANAGEMENT SOFTWARE

Software that allow to manage the access control network system. Platform, WINDOWS. Management of events. Management of users. Creation of time zones. Tool to control the worked hours. Tool to create detailed reports. CLIENT or SERVER configuration.



#### 850106

#### **NETWORK 4K PROXIMITY READER**

Proximity reader with control by software. EM technology (125Khz). Made in high quality aluminum.  $Can \ be \ installed \ embedded \ or \ surface. \ Internal/external \ installation. \ Communication \ protocol$ WIEGAND, CLOCK & DATA or CODIX.



#### 940102

#### STAINLESS STEEL NETWORK 4K PROXIMITY READER

Proximity reader with control by software. EM technology (125Khz). Made in high quality polished stainless steal. Can be installed embedded or surface. Internal/external installation. Communication protocol WIEGAND, CLOCK & DATA or CODIX.



#### 507223

#### COMPACT 4K NETWORK PROXIMITY MODULE

4K proximity module with control by software that can be installed at COMPACT and STAINLESS STEEL panels. EM technology (125Khz). Communication protocol WIEGAND, CLOCK & DATA or COOIX.



#### 721165

#### **NETWORK PROXIMITY READER**

Proximity reader for access control. EM technology (125Khz). Made in high quality ABS. Surface installation. Internal/external installation, IP65. Communication protocol WIEGAND, CLOCK & DATA or CODIX.



#### 721117

#### **FM PROXIMITY CARD**

Proximity card numerated ISO 4002. EM technology (125Khz). Can be personalized.



#### 721118

#### **EM PROXIMITY KEY FOB**

Proximity KEY FOB numerated ISO 4002. EM technology (125Khz).



#### 721166

#### NETWORK BK MINI KEYPAD

Keypad for access control. Made in high quality ABS. Surface installation. Internal/external installation, IP65. Communication protocol WIEGAND, CLOCK & DATA or CODIX.



#### 721123

#### ANTI-VANDAL NETWORK KEYPAD

Keypad for access control. Made in high quality EXTRA ABS. Surface installation. Internal/external installation, IP65. Communication protocol WIEGAND, CLOCK & DATA or CODIX. PROMOTION UNTIL

END OF STOCK

#### **NETWORK**

DESCRIPTION



721167

#### OUTDOOR NETWORK BIOMETRIC READER BK

Finger print reader for access control. Up to 98 finger prints. Made in high quality ABS. Surface installation. Internal/external installation, IP65. Communication protocol WIEGAND\_BUS-485.



721158

#### **NETWORK BIOMETRIC + PROXIMITY READER**

 $\hbox{DUAL reader. Includes finger print read and proximity read of cards/fobs. Up to 98 finger prints and \\$ 2000 cards. EM and HID technology (125Khz). Made in high quality aluminum. Surface installation. Internal/ external installation, IP65. WIEGAND\_BUS-485.



721159

#### **NETWORK BIOMETRIC + KEYPAD READER**

DUAL reader. Includes finger print read and code. Up to 98 finger prints and 97 codes. Made in high quality aluminum. Surface installation. Internal/external installation, IP65. Communication protocol WIEGAND\_BUS-485.



721160

#### NETWORK PROXIMITY + KEYPAD READER

DUAL reader. Includes proximity read and code. Made in high quality aluminum. Surface installation. Internal/external installation, IP65. Communication protocol WIEGAND, CLOCK & DATA or CODIX.



721093

#### **NETWORK WIRELESS RECEIVER**

Radio frequency receiver (868Mhz). Communication protocol WIEGAND. Integrated antenna. Internal/ external installation, IP54.



721094

#### **EMITTER MINI**

2 channels radio frequency emitter. Reach 100m



721164

#### SENSITIVE BUTTON BK

Button with capacitive technology. State indicator by LED illumination. Made in high quality ABS. Surface installation. Internal/external installation, IP54. 12/24 ac/dc.



721168

#### **USB PROXIMITY ENROLLER**

Universal USB proximity reader that allow to read proximity cards EM (125Khz) also Mifare (13,56Mhz) and introduce them into the access control management software.



721161

#### **USB DUAL ENROLLER**

USB reader that allow to register and introduce finger prints or proximity cards EM (125Khz) also Mifare (13,56Mhz) into the access control software.

#### NETWORK. WEB MANAGEMENT

RFF

DESCRIPTION



#### 721180

#### WEB CONTROL UNIT 1D

WEB controller unit, connection of 1 DOOR / READER per unit. Expandable up to 20 doors. Connection of auxiliary buttons, programable inputs/outputs. 2.500 users and 50.000 events. Native TCP/IP. Rs-485 protocol. 12Vdc. Integrated battery management.



#### 721181

#### WEB CONTROL UNIT 2D

WEB controller unit, connection of 2 DOORS / READERS per unit. Expandable up to 20 doors. Connection of auxiliary buttons, programable inputs/outputs. 2.500 users and 50.000 events. Native TCP/IP. Rs-485 protocol. 12Vdc. Integrated battery management.



#### 721182

#### WEB CONTROL UNIT 4D

WEB controller unit, connection of 4 DOORS / READERS per unit. Expandable up to 20 doors. Connection of auxiliary buttons, programable inputs/outputs. 2.500 users and 50.000 events. Native TCP/IP. Rs-485 protocol. 12Vdc. Integrated battery management.



#### 721183

#### 1 DOOR / READER EXPANDER -1D

Expansion module 1 DOOR / READER for 1D control unit. It allows to expand and manage 1 extra DOOR / READER in systems with 1D exchanges.



#### 721184

#### UNIVERSAL CABINET + PSU FOR WEB SYSTEMS

Universal aluminum wall mounted housing far WEB systems. Includes 1 x 5A PSU. Includes placement for 1 battery.



#### 721175

#### MINI PROXIMITY READER RS-485

Proximity reader for access control. EM Technology (125Khz). Made of high quality ABS. Surface installation. Suitable for outdoor / indoor. IP-65. RS-485 protocol.



#### 721176

#### PROXIMITY READER MINI RS-485

Proximity reader far access control. EM technology (125Khz). Made in high quality ABS. Surface installation. Internal/external installation, IP55. Protocol RS-485. 12Vdc.



#### 721177

#### **RS-485 CONVERTER**

Interface that allows the connection and control of any reader, WIEGAND, DATA/CLOCK ISO2, DALLAS and RS-232, into the access control WEB system



#### 721117

#### **EM PROXIMITY CARD**

Proximity card numerated ISO 4002. EM technology (125Khz). Can be personalized



#### 721118

#### **EM PROXIMITY KEY FOB**

Proximity key fab numerated ISO 4002. EM technology (125Khz)

#### STANDALONE / REMOTE MANAGEMENT

RFF

DESCRIPTION



#### 721077

#### **USB RECORDING STATION + SOFTWARE**

 $Recording \ station \ for \ cards/key \ fobs/emitters. \ Information \ of \ new/delete/swap \ users \ inside \ the$ programmed element. It is not necessary to be in the system to manage the users. Protection of the installation through installer PIN.



#### 507226

#### STAND-ALONE COMPACT PROXIMITY READER

Proximity module for remote management systems that can be installed at COMPACT and STAINLESS STEEL panels. Storage up to 500 users.l programmable relay. 12/24 ac/dc



#### 507227

#### COMPACT PROXIMITY READER FOR DUAL SYSTEM

Proximity module for remote management systems that can be installed at COMPACT and STAINLESS STEEL panels and connected to a wireless emitter 721096. That convert the system in a double



#### 721097

#### PROXIMITY READER FOR DUAL SYSTEM

Proximity reader for remote management systems that can be connected to a wireless emitter 721096. That convert the system in a double technology access system.



#### 721099

#### PROXIMITY CARD

Programmable proximity card with 150 numeration. Can be personalized.



#### 721098

#### PROXIMITY KEY FOB

Programmable proximity KEY FOB with 150 numeration. Can be personalized.



#### 721096

#### WIRELESS RECEIVER

Radio frequency receiver (868Mhz). Storage up to 500 emitters. 2 programable relays. Integrated antenna. Internal/external installation, IP54. 12/24 ac/dc.



#### 721094

#### **EMITTER MINI**

2 channels radio frequency emitter. Reach 100m.



#### 721095

#### **DUAL EMITTER MINI**

2 channels radio frequency emitter + proximity. Reach 100m

#### **POWER SUPPLY & ACCESSORIES**

REF.

DESCRIPTION



715503

#### ATF-12 POWER SUPPLY UNIT

Analog power supply. Entry 220-230 Vac. Output 12Vac 1.2A. Made of high quality ABS. It is mainly used in analog installations. It can also be used in systems where you want to feed a 12Vac door opener up to 1.2A. Can be mounted on the surface or DIN rail (2 elements).



716003

#### ALV-2A 12Vcc POWER SUPPLY UNIT

12Vcc 2A. Made of high quality ABS. Can be mounted on the surface or DIN rail (4 elements).



715303

#### ALV-1.5A. 24Vcc POWER SUPPLY UNIT

24Vcc 1.5A. Made of high quality ABS. Can be mounted on the surface or DIN rail (3 elements).



715703

#### ALV-2.5A. 24Vcc POWER SUPPLY UNIT

24Vcc 2.5A. Made of high quality ABS. Can be mounted on the surface or DIN rail (3 elements).



720017

#### UNIVERSAL DOOR-OPENER ADF/S 10-24V AC/DC

Last generation door-release. Small (like switcher box) (with 25,5 mm depth) It's coil works with AC or DC current with a range from 10 to 24 V



730145

#### 24V BATTERY BACKUP

Battery backup for 24Vcc based systems.. Made of high quality ABS. Status LEDS. Battery protection against power total lost. Can be mounted on the surface or DIN rail (6 elements).



721433

#### 12V 7AH BATTERY

Rechargeable battery. NiMH 12V 7.2Ah.

| NOTES |  |  |  |  |  |
|-------|--|--|--|--|--|
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |
|       |  |  |  |  |  |

## General conditions

#### **ORDERS**

Orders must be faxed to our fax number +34961665286 or emailed to export@auta.es

#### **DELIVERY TERMS**

Standard items: I week after order's reception Stainless Steel panels: 3 weeks after order's reception

#### **RETURNS**

Returns will be only accepted when a delivery is mistaken. The returns will not be credited until reception. All the returns will be inspected upon arrival. They must returned with the original packaging.

#### **WARRANTY**

Auta comunicaciones, s.l. grants all its products with a 3 years warranty since the delivery date. In case of an improper use, improper installation or incorrect voltage.

Auta comunicaciones, s.l. is fully excluded of any responsibility on direct or indirect damages on the products.

The warranty is limited to the product restitution

#### **TECHNICAL ASSISTANCE SERVICE**

Our technical assistance department is able to give you any needed advise at working hours. They can also provide special drawings for special installations. You can contact them by phone on +34961643020 or by email on tecnico@auta.es / sat@auta.es

#### **RESERVES**

Auta comunicaciones, s.l. has the right to amend the technical specifications as well as the prices of all products listed in this catalogue with not prior notice..

#### **ACCEPTANCE**

An official order from a client will be considered as a fully acceptance of these general conditions.



Door entry Video door entry Access control

Auta Comunicaciones, s.l.

Polígono Industrial El Oliveral. Calle C, s/n. 46394 Riba-Roja Valencia. España (Spain)

**T** +34 961 643 020 **F** +34 961 665 286 **E** auta@auta.es

